CIP LIGHTING

Charlotte International Partners Inc., 1740 First Baxter Crosing, Fort Mill, SC 29708 USA


19.2 WATTS/METER HI CRI COLOR TEMPERATURE ADJUSTABLE FLEXIBLE RIBBON/TAPE LIGHTS

PROJECT NAME: _____

PRODUCT #: CIP-OL-19.2HC-CT-24-(43/65/66/67/68)-(T/C)





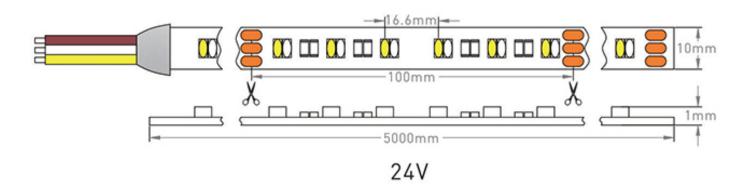

- ~ COLOR TEMPERATURE ADJUSTABLE FLEXIBLE LED RIBBON/TAPE LIGHT, CRI 80+ AND 19.2 WATTS/METER.
- ~ 10MM WIDE x 5 METERS (16.25 ft.) IN LENGTH. ~ AVAILABLE IN 24 VOLT VERSION
- ~ FIELD CUTTABLE TO DESIRED LENGTH BY CUTTING ON COOPER WELDS AS INDICATED.
- ~ PRODUCT IS SUPPLIED WITH 3M TAPE ON THE BACK SIDE FOR MOUNTING TO A CLEAN NON-PORUS SURFACE.
- ~ INSTALLATION ON ALUMINUM EXTRUSIONS IS RECOMMENDED.
- ~ PRODUCT SHOULD BE POWERED BY 24 VOLT, CONSTANT VOLTAGE LED DRIVER, (UL/ETL LISTED)FOR USE WITH LOW-VOLTAGE LED LIGHTING PRODUCTS.
- ~ Contact CIP Customer Service for details.

CIP LIGHTING

Charlotte International Partners Inc., 1740 First Baxter Crosing, Fort Mill, SC 29708 USA

19.2 WATTS/METER COLOR TEMPERATURE ADJUSTABLE FLEXIBLE RIBBON/TAPE LIGHTS

Color Temps:

WHITE Adjustable: 2700°K (860-1,060m/m) - 6500°K (920-1,120lm/m) 100% Mix (1,780-2,180lm/m)

Also known as Dynmaic White.

IP Rating:

IP43 (Interior Use - Dry location)

IP65 (Interior Use - Humid Environment, back side of PCB board exposed)

IP66 (Wet location - not immersible, Silicone tubing encases strip)

IP67 (Wet location - not immersible, heat shrink rubing encases strip)

IP68 (Immersible only, not for human inhabitants, silicone tubing with silicone filling)

Tape on Back or Clips:

IP43 - Tape on Back, Recommends extrusion.

IP65 - Tape on Back, Recommends extrusion.

IP66 - Tape on Back, recommends extrusion or for Use with Clips.

IP67 - Tape on Back, Recommends extrusion.

IP68 - Tape on Back, Recommends extrusion or for use with Clips.

Extrusions:

See recommended extrusion

Color Temp Controller:

CIP-OL-CTAC144/288

20 meters (65.6ft) Touching Color Temperature Adjustable Controller. PWM remote control. 12/24V DC Working voltage. 144/288 watts, with one remote handset. 5 keys on remote.

