

Construction:


- 0.8mm steel housing
- 1.2mm aluminum heatsink
- Poly carbonate Lens
- Isolated LED driver
- Epistar 2835 LED chips
- Option: Wire Guard
Acrylic Cover

Electrical control:


- Input voltage range: 100-277V AC
- Frequency: 50-60Hz
- Power factor: >0.95
- Harmonic Distortion: THD<13%
- Optional: Micro wave motion sensor
Emergency battery back up



CRI
>83

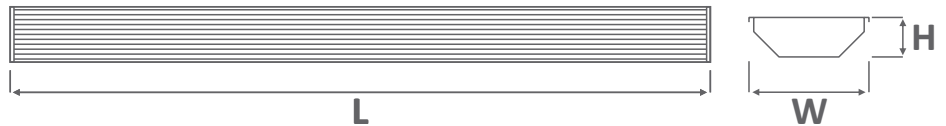

CB CE SAA



Warehouse



Supermarket



Gymnasium

Model	Wattage	Size	Dimensions(mm)	Voltage	Lumens	LED Quantity	CCT(K)
OG-PLED-420	80W	4'	1215X285X100	100-277V	7600-8800lm	480(2835/0.2W)	3000 4000 5000 6000
OG-PLED-430	120W	4'	1215X285X100	100-277V	11400-13200lm	480(2835/0.5W)	
OG-PLED-440	160W	4'	1215X285X100	100-277V	15200-17600lm	480(2835/0.5W)	
OG-PLED-620	120W	4'	1215X410X100	100-277V	11400-13200lm	720(2835/0.2W)	
OG-PLED-630	180W	4'	1215X410X100	100-277V	17100-19800lm	720(2835/0.5W)	
OG-PLED-640	240W	4'	1215X410X100	100-277V	22800-26400lm	720(2835/0.5W)	
OG-PLED-450	200W	5'	1500X285X100	100-277V	19000-22000lm	720(2835/0.5W)	
OG-PLED-650	300W	5'	1500X410X100	100-277V	28500-33000lm	1080(2835/0.5W)	