

45W LED Slim Canopy Light



Features

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design, high quality and better cooling for LED $T_j < 85^{\circ}\text{C}$.
- Excellent Optics design, greatly improve the light utilization and evenness.
- Motion sensor Control Available (Option)

Product Applications

CIP LED Slim Canopy Light series can be widely used in outdoor lighting (Wet location), Excellent for Museums, Art Galleries, Underground parking lot, Buildings, The lawn, Industrial areas, Residential areas, Sidewalks, Parking lot, Schools, Gardens and etc, and many more applications.




Specifications

Unit : inch(mm)

Structure Features


- Shell materials: Aluminum & PC.
- Finish: Dark Bronze/White
- Net weight : 2.47Kg (5.5 lbs)
- Product Size:255.5mm*255.5mm*83.7mm
- Carton Size:310mm*310mm*130mm

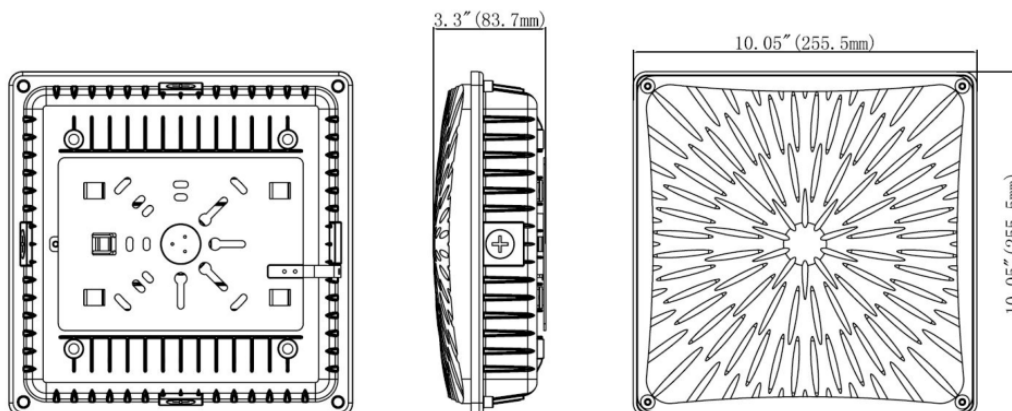

Technical Parameters

CIP-WSD-CP45W27-XXK			
Power	45W	Lighting Angle	159°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	5300 Lm	Storage Temperature	-40 - +80°C
Color Temperature	3000K/4000K/5000K/5700K	Protection Level	Wet Location/IP65
CRI	Ra>80	Cable	Input Connect, 0.3m
Optional dimming function	1-10Vdc		

Photometry

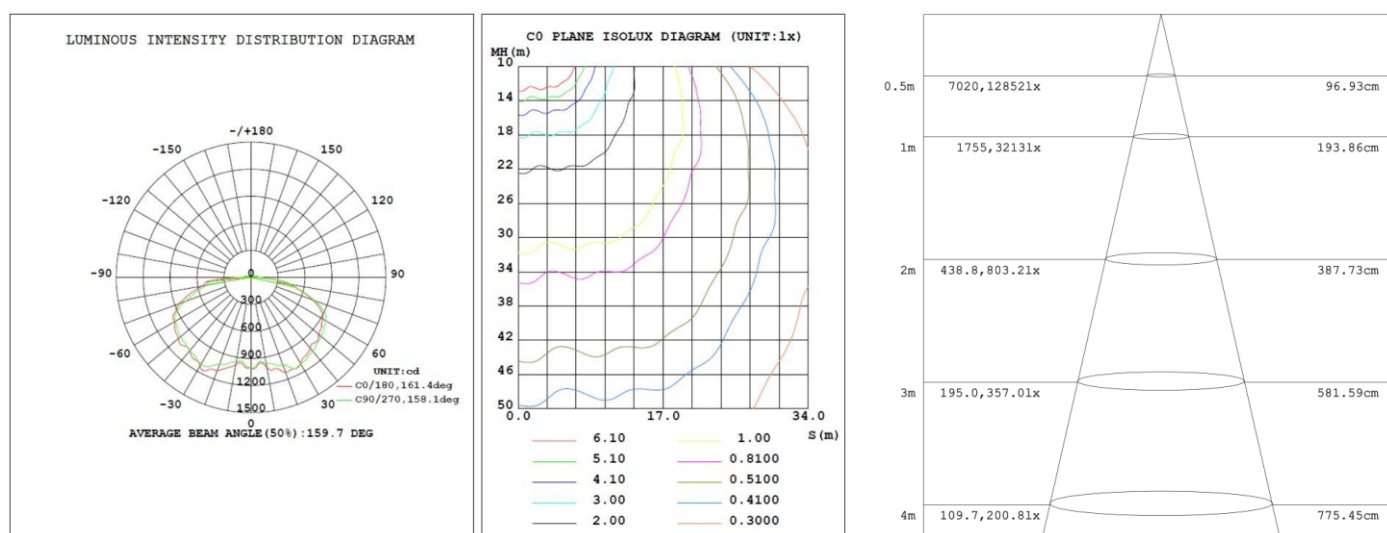

Example:CIP-WSD-CP45W27-XXK-D-M

CIP-WSD	CP	45W	27	50K	D	M	1-10V
Company	Product	Power	Voltage	Color Temp	Finish	Motion sensor	Option
	CP	45W(45W)	27	30K(3000K)	D	M	
CIP	Slim Canopy	65W(65W)	AC120-277V	40K(4000K)	Dark Bronze	Motion sensor	
			347	50K(5000K)	W		
			AC347V	57K(5700K)±500K	White		

Charlotte International Partners Inc.

1740 First Baxter Crossing, Fort Mill, SC 29708 USA

info@ciplighting.com 1-803-396-1439 www.ciplighting.com