

DESCRIPTION

CIP "NISEKO" circular series LED Luminaries are designed to be both elegant and creative while providing energy efficient high lumen output. The classic Niseko with its low profile seamless aluminium frame and thick flawless acrylic lens offers a bright consistent down light output within a beautiful fixture. The flexible design of 1-3 rings, hanging options and a range of lumen output makes the Niseko a functional LED pendant while providing a sleek look that's sure to impress.

"NISEKO" LED PENDANT



Matte White



Grey



Platinum



Burnished Gold



Rose Gold



Dark Burgundy



Matte Black



Standard Profile colors are Matte White, Platinum, (Custom sizes and shapes are possible)

OVERVIEW:

- Efficiency: Up to 120 LPW
- Delivered Lumen: Up to 10,350
- 1 tier, 2 tier, 3 tiers are Standard, available in custom designed tiers
- 1 tier 16"= 20w: 24"= 30w: 32"= 40w: 40"= 50w: 48"= 60w
- 2 tier 16" x 24" = 50w: 32" x 40" = 90w: 40" x 48" = 90w
- 3 tier 16" x 24" x 32" = 90w: 32" x 40" x 48" = 90W
- Size and wattages are customizable
- CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- CRI: Minimum 80

- Controls: 0-10V dimming
- Limited Warranty: 10 Years, 100,000-hour at 25°C
- Suspended
- UL, cUL, FCC
- Power factor: ≥ 0.97
- Input Voltage: 100-277 VAC universal
- RGB, RGBW, Color Tunable are Available
- Beam Angle: 360°

SPECIFICATION FEATURES

NISEKO

Construction

The seamless aluminum frame houses the High Lumen SMD chips. Thick acrylic lens provides elegant look with bright, clean light. Driver box is separate in canopy and can be mounted remotely.

Controls

The LED Pendant Lamp is equipped standard with a 0-10V dimming driver. RGB, RGBW, Wi-Fi and Color Tunable are Available.

Electrical

Long-Life SMD LED system is coupled with high end LED driver. Power is provided through the suspension cables for a clean look. Aluminum frame provides heat dissipation extending fixture life. 100V-277V. 0-10V dimming driver is standard.

Finish

Powder coated finish in Matte White, Dark Burgundy and Platinum is Standard.

Additional colors available in Black, Burnished Gold, Rose Gold, Consult you're lighting representative at Snowball for a complete selection of colors.

Hanging


With suspension mounting the possibilities of creating a unique style are endless, simply adjust the length of each independent suspension cable to create the desired effect. Choices of canopies are available. Cables are 6 feet long as standard, custom lengths are available.

Optics

A high transmittance Acrylic lens provides bright and uniform light distribution with color consistency.

Compliance

cULus, Fcc listed, RoHS compliant. Dry location

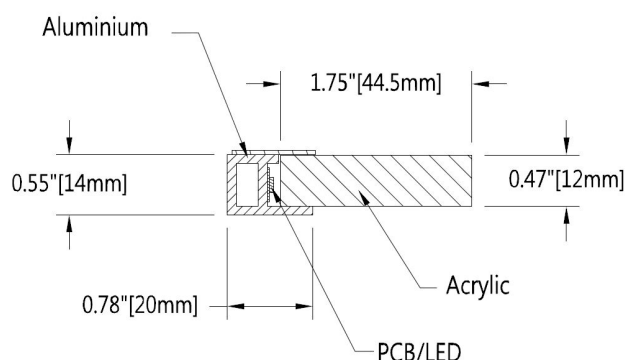



PROFILE VIEW

1 TIER DIMENSION


16" 20W 2.4KG 5.3 lb

24" 30W 3KG 6.6 lb


32" 40W 3.6KG 7.9 lb

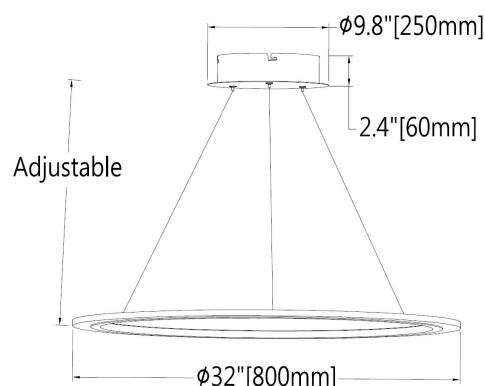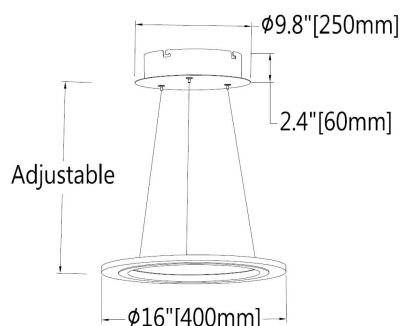

40" 50W 4.2KG 9.3 lb

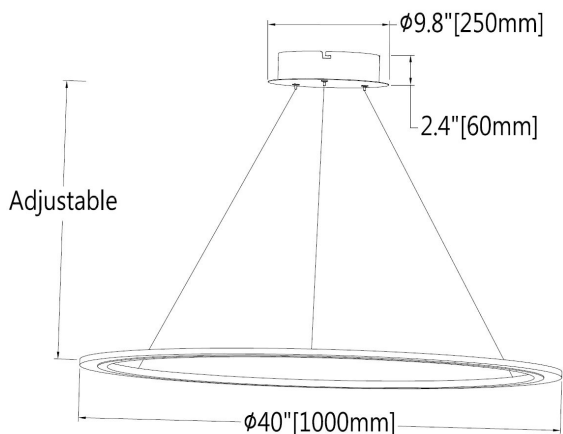


48" 60W 4.8KG 10.6 lb

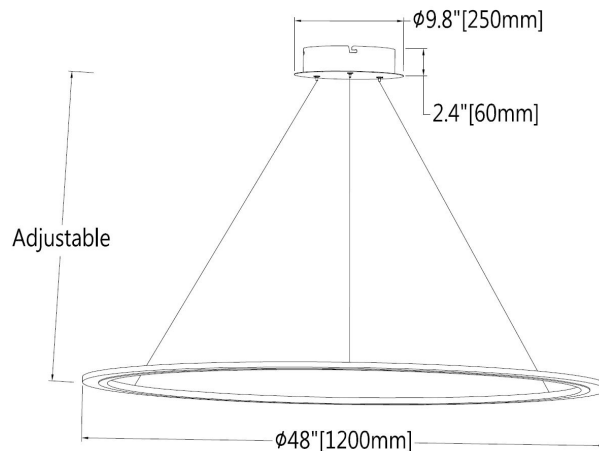


2 TIER DIMENSION


16" + 24" 50W 4.2KG 9.3 lb

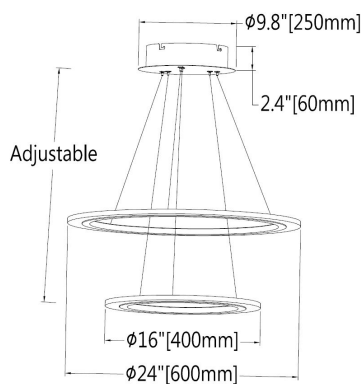

32" + 40" 90W 6.8KG 15 lb

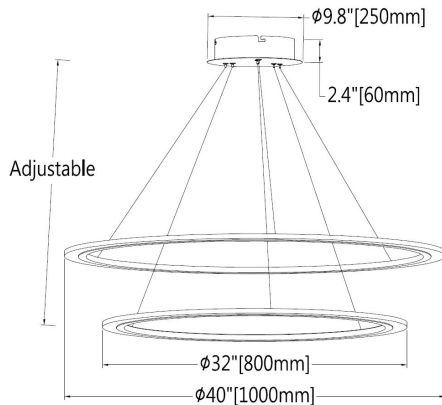


40" + 48" 90W 8KG 17.6 lb

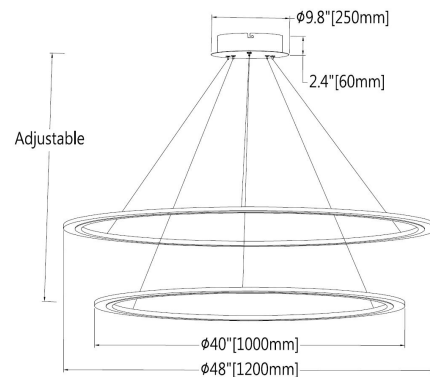


3 TIER DIMENSION


16"+24" + 32" 90W 6.8KG 15 lb

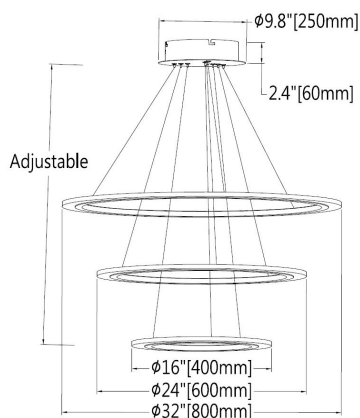

32"+40" + 48" 90W 10.4KG 22.9 lb

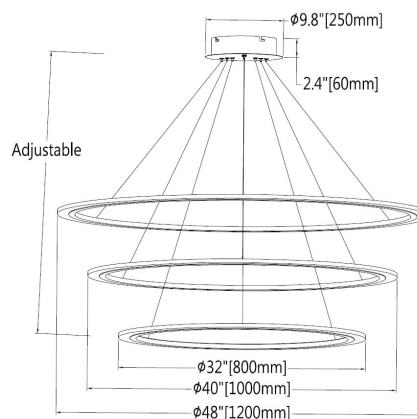


O40PA

Products series	Wattage	Type	Options	Finish	Hanging system	Hanging picture
CIP-SB-DE/SR/S	*20W=16" 20w	*O	27=2700K	B=Matte Black	*A=Round Driver Box (Standard)	
	30w=24" 30w		30=3000K	D=Dark Burgundy (standard)	B=Round Driver Box with Ring	
	40w=32" 40w		35=3500K	G=Burnished Gold	C= Rectangle Driver Box	
	50w=40" 50w		*40=4000K(standard)	*P=Platinum (standard)	D= Remote Driver Box	
	60w=48" 60w		50=5000K	W=Matte white (standard)		
	Other size		RG=RGB	R=Rose Gold		
			R3=RGB+3000K	G=Grey		
			R1=RGB+3500K			
			R4=RGB+4000K			
			R5=RGB+5000K			
			CT=Color temperature change 3000-6000K			


* MODEL SELECTION: 2 TIER

Example: CIP-SB-DE/SR/D/50W/O40PA


Products series	Wattage	Type	Options	Finish	Hanging system	Hanging picture
CIP-SB-DE/SR/D	*50W=16"+24" 50w	*O	27=2700K	B=Matte Black	*A=Round Driver Box (Standard)	
	90w=32" + 40" 90w		30=3000K	D=Dark Burgundy (standard)	B=Round Driver Box with Ring	
	90w= 40" + 48" 90w		35=3500K	G=Burnished Gold	C= Rectangle Driver Box	
	Other size		*40=4000K(standard)	*P=Platinum (standard)	D= Remote Driver Box	
			50=5000K	W=Matte white (standard)		
			RG=RGB	R=Rose Gold		
			R3=RGB+3000K	G=Grey		
			R1=RGB+3500K			
			R4=RGB+4000K			
			R5=RGB+5000K			
			CT=Color temperature change 3000-6000K			

* MODEL SELECTION: 3 TIER

Example: CIP-SB-DE/SR/T/90W/O40PA

Products series	Wattage	Type	Options	Finish	Hanging system	Hanging picture
CIP-SB-DE/SR/T	90W=16"+24" + 32" 90w	*O	27=2700K	B=Matte Black	*A=Round Driver Box (Standard)	
	*90w1=32"+40" + 48" 90w		30=300K	D=Dark Burgundy (standard)	B=Round Driver Box with Ring	
	Other size		35=3500K	G=Burnished Gold	C= Rectangle Driver Box	
			*40=4000K(standard)	*P=Platinum (standard)	D= Remote Driver Box	
			50=5000K	W=Matte white (standard)		
			RG=RGB	R=Rose Gold		
			R3=RGB+3000K	G=Grey		
			R1=RGB+3500K			
			R4=RGB+4000K			
			R5=RGB+5000K			
			CT=Color temperature change 3000-6000K			

RGB

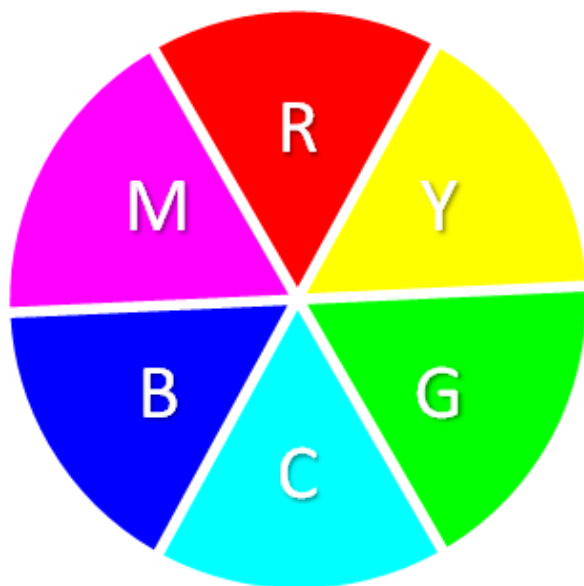

CCT:



* RGB,RGBW, CCT ACCESSORIES

Item Accessory	PICTURE	MODEL NUMBER	DESCRIPTION
Options		RGB-T3M	RGB wireless hand remote, 10 zones programmable, 100 feet signal receiving distance
		RGBW-T4	RGBW hand remote, 8 zones programmable, 100 feet signal receiving distance
		RGB-DX3	RGB wireless wall control, 4 zones programmable, 100 feet signal receiving distance
		RGBW-DX4	RGBW wireless wall control, 1 zone programmable, 100 feet signal receiving distance
		RGBW-DX8	RGBW wireless wall control, 4 zones programmable, 100 feet signal receiving distance
		CCT-T2	Color temperature change hand remote, 8 zones programmable, 100 feet signal receiving distance
		CCT-DX2	Color temperature change wireless wall control, 1 zone programmable, 100 feet signal receiving distance
		CCT-DX7	Color temperature change wireless wall control, 4 zones programmable, 100 feet signal receiving distance
		DMX-D	DMX decoder
		Wifi-103	1 zone Wifi control with phone and iPad
		Wifi-104	12 zones Wifi control with phone and iPad



STATIC LUMEN OUTPUT

NISEKO

GENERAL PERFORMANCE		16" 20w	24" 30w	32" 40w	40" 50w	48" 60w
1 tier	3000K	1900	2700	3600	4500	5400
	4000K	2000	2800	3700	4600	5500
	5000K	2100	2900	3800	4700	5600
GENERAL PERFORMANCE		16" + 24" 50w	32" + 40" 90w	40" + 48" 90w		
2 tier	3000K	4500	7200	8100		
	4000K	4600	7300	8200		
	5000K	4700	7400	8300		
GENERAL PERFORMANCE		16"+24" + 32" 90w	32"+40" + 48" 90w			
3 tier	3000K	7200	8100			
	4000K	7300	8200			
	5000K	7400	8300			