


LED DOWNLIGHT

GTR2705 SERIES

INTRODUCTION



FEATURES

Skilled Professional Production Technology
Optimized Anti-glared Deep Barfied Spotlight
Split Baffle in Multiple Colors for Options
Color Rendering Index Ra>80 【Ra>90】
Long Lifespan Design>50,000hours
Working Temperature: -15℃~40℃

MATERIALS & FINISH

LED Branding: CREE & PHILIPS
External Driver Branding: GTE
GTE Patent Aluminum Radiator Housing
High Efficiency Reflector
Transparent Tempered Glass Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS


Designed and Manufactured to Comply with
TUV/GS/CE/RoHS/EMF/SA/Erp
IP20 Protection, Class II Electric

OPTIONS

LED Color Temperature: CCT2000-6500K
LED Color: Red, Green, Blue, Amber
Dimming: 1-10V, Triac, DALI, DMX, RF, ZigBee, WIFI
【IP44】: IP44 Protection
Housing Finish Color:



DIMENSION: 【UNIT: MM】

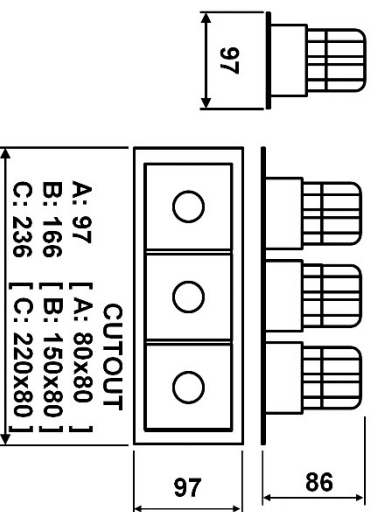

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR2705A-10W-WW	10W	CXA1507 CREE COB	3000K	620	>0.9	15/30/45°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CC&AZIGBEE	AC100~277V 50/60Hz [DC24V]
GTR2705A-10W-NW			4000K	650				
GTR2705A-10W-PW			6000K	700				
GTR2705A22-10W-CN	2C@10W	15CW	WW	CW	650			
GTR2705B-20W-WW	20W	2xCXA1507 CREE COB	3000K	2x620	>0.9			
GTR2705B-20W-NW			4000K	2x650				
GTR2705B-20W-PW			6000K	2x700				
GTR2705B22-20W-CN	2C@20W	24CW	WW	CW	2x650			
GTR2705C-30W-WW	30W	3xCXA1507 CREE COB	3000K	3x620	>0.9			
GTR2705C-30W-NW			4000K	3x650				
GTR2705C-30W-PW			6000K	3x700				
GTR2705C22-30W-CN	2C@30W	36CW	WW	CW	3x650	>0.9		

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com