


VAPOR TIGHT LED BATTEN LIGHT



INTRODUCTION

FEATURE

Refined Replacement Fluorescent Tri-proof Light
Corrosion Resistant, Waterproof and Dustproof
Easy Installation and Maintenance Freely
Color Rendering Index Ra≥80
Long Lifespan > 50,000hours
Working Temperature -30℃~50℃

MATERIAL & FINISH

LED Brand: SAMSUNG [LM80]
Internal Flicker-free Driver Brand: GUBO
Housing: Flame Retardant PC Housing
Optics: PCB Itself Nano Reflecting
Diffuser: Frosted Strip PC Diffuser
Clips: Stainless Steel SUS304.

INSTALLATION

Surface Mounted or Suspended
Widely Application for Parking Lot, Workshop,
Warehouse, Supermarket, Office, Food Factory.....

STANDARD

Designed and Manufactured to Comply with
CE/ROHS/EMF/GS/CB/cETL/SAA/SASO Standard
Withstand Voltage: 3.75KV, Surge Protection(L-N): 1KV
IP65 and IK08 Protection, Class II & I Electrical

OPTION


LED CCT: 1800K/2700K/3500K/5000K/6000K
LED Color: Red, Green, Blue, Amber
Personal Eye Protection Standard: RG0 (EN166:2001)
Color Rendering Index: Ra90, Ra97
[CBE] Emergency Version: 5W & 10W
[CBES] Self-testing Emergency Version: 5W & 10W
External Emergency Switch & Indicator
[CSMD] :Dimming Microwave Motion Sensor
● Detection Zone: D8xH8meters
● Hold Time: 5s/30s/60s/5min/10min/15min/30min
● Standby Dimming Level: 10%-20%-30%
● Standby Period: Always or 0/1/3/5/10/30min
● Daylight Sensor: Disable or 5/10/25/50/100 Lux

FROSTED
DIFFUSER


[M]: Opal Diffuser

[SUSPENSION]


EMERGENCY
SWITCH&INDICATOR



DIMENSION: [UNIT: MM]

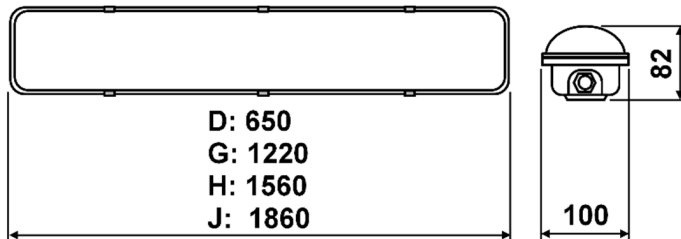

CASE STUDY:

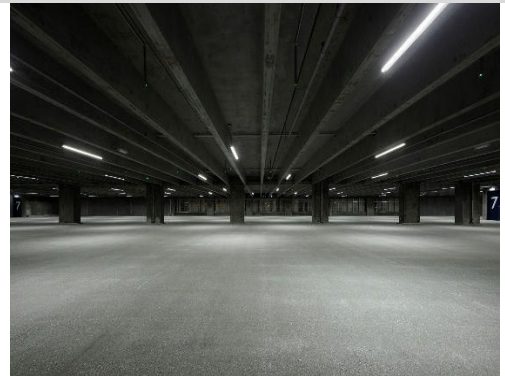

MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT 【V】			
GTR6811D-20W-WW30	20W	102x0.5W SMD2835	3000K	RA80	2200	>0.9	150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [DC24V]			
GTR6811D-20W-NW40			4000K	RA80	2260							
GTR6811D-20W-CW60			6000K	RA80	2400							
GTR6811D-20W-TW	2C@20W	48TW	WW27	CW60	RA80	2200				>0.9		
GTR6811D-20W-RGBW	4C@20W	48RGBW	R	G	B	W				RA80	2200	>0.6
GTR6811G-20W-WW30	20W	102x0.5W SMD2835	3000K	RA80	2200	>0.9						
GTR6811G-20W-NW40			4000K	RA80	2260							
GTR6811G-20W-CW60			6000K	RA80	2400							
GTR6811G-36W-WW30	36W	192x0.5W SMD2835	3000K	RA80	3960	>0.9						
GTR6811G-36W-NW40			4000K	RA80	4050							
GTR6811G-36W-CW60			6000K	RA80	4320							
GTR6811G-45W-WW30	45W	240x0.5W SMD2835	3000K	RA80	4950	>0.9						
GTR6811G-45W-NW40			4000K	RA80	5100							
GTR6811G-45W-CW60			6000K	RA80	5400							
GTR6811G-40W-TW	2C@40W	96TW	WW27	CW60	RA80	3400				>0.9		
GTR6811G-40W-RGBW	4C@40W	96RGBW	R	G	B	W				RA80	3360	>0.7
GTR6811H-54W-WW30	54W	288x0.5W SMD2835	3000K	RA80	5950	>0.9						
GTR6811H-54W-NW40			4000K	RA80	6100							
GTR6811H-54W-CW60			6000K	RA80	6500							
GTR6811H-65W-WW30	65W	360x0.5W SMD2835	3000K	RA80	7150	>0.9						
GTR6811H-65W-NW40			4000K	RA80	7350							
GTR6811H-65W-CW60			6000K	RA80	7800							
GTR6811H-60W-TW	2C@60W	120TW	WW27	CW60	RA80	7150				>0.9		
GTR6811H-60W-TW	2C@60W	120RGBW	WW27	CW60	RA80	7150				>0.9		
GTR6811J-65W-WW30	65W	360x0.5W SMD2835	3000K	RA80	7150	>0.9						
GTR6811J-65W-NW40			4000K	RA80	7350							
GTR6811J-65W-CW60			6000K	RA80	7800							
GTR6811J-80W-WW30	80W	540x0.5W SMD2835	3000K	RA80	8800	>0.9						
GTR6811J-80W-NW40			4000K	RA80	9080							
GTR6811J-80W-CW60			6000K	RA80	10000							
GTR6811J-80W-TW	2C@80W	192TW	WW27	CW60	RA80	8800				>0.9		

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com