


LED BATTEN LIGHT

SUSPENSION
KITS

SPLICE



INTRODUCTION

FEATURES

Refined Replacement of Fluorescent Batten Light
Optimized Structure According to LED Technology
Dural High Quality Uniform General Lighting
Long Lifespan Design > 50,000hours
Working Temperature: -20°C~40°C

MATERIALS & FINISH

LED Brand: SMD LEDs (LM80)
Internal Flicker-free Driver Brand: GUBO
Housing: Aluminum Profile
Diffuser: Frosted PC Diffuser

INSTALLATION

Surface Mounted By SUS304 Clips

STANDARDS


Designed and Manufactured to Comply with
TUV/CE/RoHS/ERP/SAA/cETL/FCC/SASO
Withstand Voltage: 3.75KV, Surge Protection(L-N):1KV
IP20 Protection, IK06, Class I Electric

OPTIONS

LED CCT: 1800K/2700K/3500K/5000K/6000K
LED Color: Red, Green, Blue, Amber
Personal Eye Protection Standard: RG0 (EN166:2001)
Color Rendering Index: Ra90, Ra97
Seamless Linkable Power: Maxi.200W or 600W
[CBE]: Emergency Back-up, 5W/10W/15W
Housing Finish Color: Any color in RAL

SILVER
[H03]WHITE
[H01]BLACK
[H02]GREEN
[HGN]

DIMENSION: [UNIT: MM]

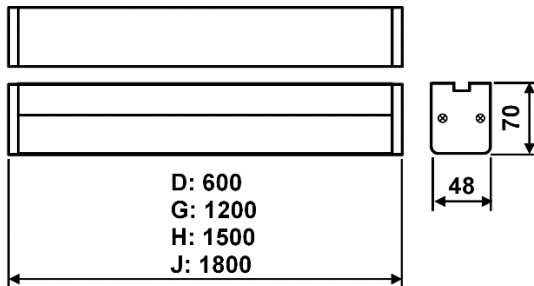

CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】		CRI	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT 【V】			
GTR6602D-18W-WW30	18W	120x0.5W SMD2835	3000K		RA80	2040	>0.9	180°	TRIAC&0/1-10V DMX512&DALI IR&RF&WIFI PWM&ZIGBEE	AC100~240V [AC100~277V] 50/60Hz [DC24V]			
GTR6602D-18W-WW35			3500K			2040							
GTR6602D-18W-NW40			4000K			2180							
GTR6602D-18W-PW50			5000K			2180							
GTR6602D-18W-CW60			6000K			2220							
GTR6602D-18W-TW	2C@18W	120TW	WW30	CW60	RA80	2040	>0.9						
GTR6602D-18W-RGBW	4C@18W	120RGBW	R	G	B	W	\				2730	>0.5	
GTR6602G-36W-WW30	36W	240x0.5W SMD2835	3000K		RA80	4080	>0.9						
GTR6602G-36W-WW35			3500K			4080							
GTR6602G-36W-NW40			4000K			4360							
GTR6602G-36W-PW50			5000K			4360							
GTR6602G-36W-CW60			6000K			4440							
GTR6602G-36W-TW	2C@36W	240TW	WW30	CW60	RA80	4080	>0.9						
GTR6602G-36W-RGBW	4C@36W	240RGBW	R	G	B	W	\				4080	>0.6	
GTR6602H-45W-WW30	45W	288x0.5W SMD2835	3000K		RA80	5220	>0.9						
GTR6602H-45W-WW35			3500K			5220							
GTR6602H-45W-NW40			4000K			5580							
GTR6602H-45W-PW50			5000K			5580							
GTR6602H-45W-CW60			6000K			5670							
GTR6602H-45W-TW	2C@45W	312TW	WW30	CW60	RA80	5220	>0.9						
GTR6602H-45W-RGBW	4C@45W	312RGBW	R	G	B	W	\				5220	>0.8	
GTR6602J-54W-WW30	54W	360x0.5W SMD2835	3000K		RA80	6350	>0.9						
GTR6602J-54W-WW35			3500K			6350							
GTR6602J-54W-NW40			4000K			6790							
GTR6602J-54W-PW50			5000K			6790							
GTR6602J-54W-CW60			6000K			6910							
GTR6602J-54W-TW	2C@54W	360TW	WW30	CW60	RA80	6350	>0.9						
GTR6602J-54W-RGBW	4C@54W	360RGBW	R	G	B	W	\				6350	>0.8	

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com