

INTRODUCTION

FEATURE

Modern Post Top Area Lighting
Simple Elegance Uniform Structure
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index >80
Long Lifespan >50,000hours
Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: CITIZEN & LUMILEDS
Driver Brand: GUBO
Housing: Die-casted Aluminum
Heat Sink: Die-casted Aluminum Module
Optics: High Efficiency PC Lens
Diffuser: Clear PC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting: Φ170mm Post
Suitable for Road Light, like Street, Park.....

STANDARD


Designed and Manufactured to Comply with
CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class I Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS, LUMILEDS
[Post]: Height 2.5M/3.5M/4.5M/6M
[CSC]: Photocell Sensor
Custom Housing Color Finish: (Any Colors in RAL)

BLACK [HBK]	GOLD [HGD]	GRANITE [HGT]	BROWN [HBR]


							
100-277V	WARRANTY	SMD3030	120°	IP65	IK08	EURO	USA.CA
COMBO	(C)	(B)	(A)				

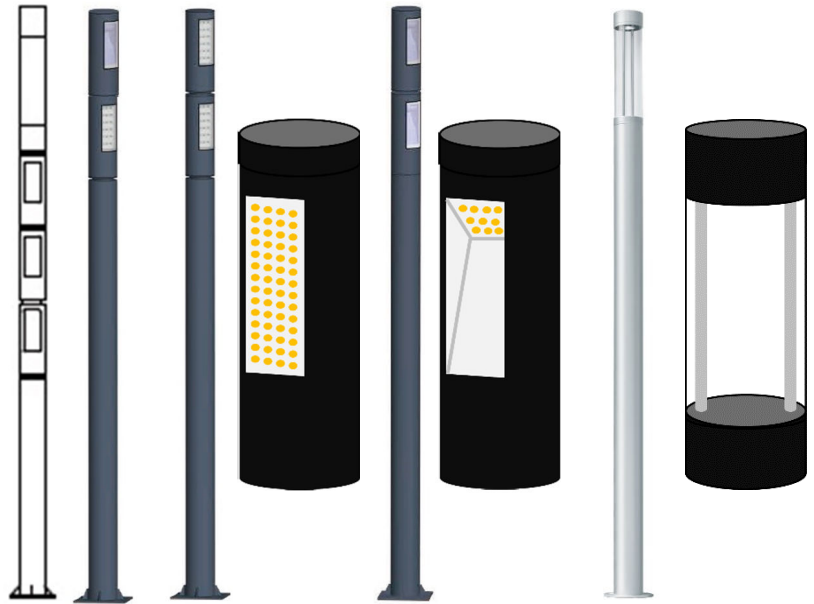

CASE STUDY:



DIMENSION: [UNIT: MM]



MODEL	POWER 【W】	LED TYPE	CCT 【K】		FLUX 【LM】	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT 【V】		
GTE2128A-50W-WW30	50W	60x1.5W SMD3030	3000K		4020	>0.9	BLR: T5: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]		
GTE2128A-50W-NW40			4000K		4480						
GTE2128A-50W-CW57			5700K		4480						
GTE2128A22-48W-TW	2C@48W	24TW	WW27	CW65	3840	>0.9					
GTE2128A42-48W-RGBW	4C@48W	24RGBW	R	G	B	W				3360	>0.7
GTE2128A42-48W-RGBA	4C@48W	24RGBA	R	G	B	A				2880	>0.7
GTE2128B-30W-WW30	30W	15x5W SMD5050	3000K		3020	>0.9	BLP:(P15°) T3M: V80xH150°				
GTE2128B-30W-NW40			4000K		3360						
GTE2128B-30W-CW57			5700K		3360						
GTE2128B22-24W-TW	2C@24W	12TW	WW27	CW65	1920	>0.9					
GTE2128B42-24W-RGBW	4C@24W	12RGBW	R	G	B	W				1680	>0.7
GTE2128B42-24W-RGBA	4C@24W	12RGBA	R	G	B	A				1440	>0.7
GTE2128C-50W-WW30	50W	60x1.5W SMD3030	3000K		4520	>0.9	BLP:(P15°): T3M: V80xH150°				
GTE2128C-50W-NW40			4000K		4980						
GTE2128C-50W-CW57			5700K		4980						
GTE2128C22-24W-TW	2C@48W	24TW	WW27	CW65	3840	>0.9					
GTE2128C42-24W-RGBW	4C@48W	24RGBW	R	G	B	W				3360	>0.7
GTE2128C42-24W-RGBA	4C@48W	24RGBA	R	G	B	A				2880	>0.7

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.