

INTRODUCTION

FEATURE

Refined Square or Rectangle Annular Lighting
 Skilled Manufacturing to Keep Durable Uniform Quality
 Color Rendering Index Ra≥90
 Long Lifespan >50,000hours
 Working Temperature -30°C~50°C

MATERIAL & FINISH

LED Brand: SMD LEDs [LM80]
 Internal Flicker-free Driver Brand: GUBO
 Housing: Anodized Aluminum Profile Housing
 Optics: Frosted PC Diffuser

INSTALLATION

Surface Mounted or Suspended
 Widely Application for Recessed Ceiling Light, Like
 Office, Home, Hotel.....

STANDARD






Designed and Manufactured to Comply with
 CE/ROHS/EMF/GS/CB/ETL/SAASASO Standard
 IP20 and IK06 Protection, Class III Electrical

OPTION

LED CCT: 1800K/2700K/3500K/5000K/5500K
 LED Color: Red, Green, Blue, Amber
 Personal Eye Protection Standard: RG0 (EN166:2001)
 Color Rendering Index: Ra90, Ra97
 [CBE] Emergency: 5/10/20/30/40/60W, 90/180MIN
 Housing Finish Color: (Any Colors in RAL#)

SILVER [H03] BLACK [H02] GREY [H03] BROWN [H06]

[CLIP-A]		CLIP		CEILING SLIM CANOPY ON JBOX			Personal Eye Protection Standard: RG0 (EN166:2001) Color Rendering Index: Ra90, Ra97 [CBE] Emergency: 5/10/20/30/40/60W, 90/180MIN Housing Finish Color: (Any Colors in RAL#)				
[CLIP-P]		MODEL:		CRJ125A		CSJ125A		CRJ125B			
FIXED		DIMENSION(MM)		D125xH5		D125xH5		D125xH5			
PENDANT		IMAGE								SILVER [H03]	
										BLACK [H02]	
										GREY [H03]	
										BROWN [H06]	

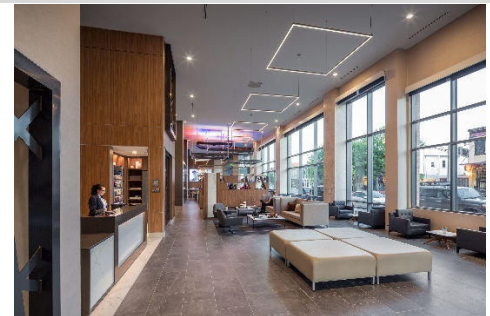

MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT 【V】			
GTR7752B-9W-WW30G	9W	36x0.5W SMD2835	G3000K	RA90	790	>0.9	120°	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ			
GTR7752B-9W-NW40G			G4000K	RA90	890							
GTR7752B-9W-CW60G			G6000K	RA90	940							
GTR7752B-9W-TW27G	2C@9W	24TW	WW27	CW60	RA90	730				≥0.9		
GTR7752B-9W-RGBW27G	4C@9W	24RGBW	R	G	B	W				RA90	730	≥0.5
GTR7752C-15W-WW30G	15W	60x0.5W SMD2835	G3000K	RA90	1310	>0.9						
GTR7752C-15W-NW40G			G4000K	RA90	1490							
GTR7752C-15W-CW60G			G6000K	RA90	1580							
GTR7752C-15W-TW27G	2C@15W	42TW	WW27	CW60	RA90	1230				≥0.9		
GTR7752C-15W-RGBW27G	4C@15W	42RGBW	R	G	B	W				RA90	1230	≥0.5
GTR7752D-18W-WW30G	18W	72x0.5W SMD2835	G3000K	RA90	1690	>0.9						
GTR7752D-18W-NW40G			G4000K	RA90	1920							
GTR7752D-18W-CW60G			G6000K	RA90	2030							
GTR7752D-18W-TW27G	2C@18W	48TW	WW27	CW60	RA90	1580				≥0.9		
GTR7752D-18W-RGBW27G	4C@18W	48RGBW	R	G	B	W				RA90	1580	≥0.5
GTR7752E-27W-WW30G	27W	108x0.5W SMD2835	G3000K	RA90	2440	>0.9						
GTR7752E-27W-NW40G			G4000K	RA90	2770							
GTR7752E-27W-CW60G			G6000K	RA90	2930							
GTR7752E-27W-TW27G	2C@27W	72TW	WW27	CW60	RA90	2280				≥0.9		
GTR7752E-27W-RGBW27G	4C@27W	72RGBW	R	G	B	W				RA90	2280	≥0.5
GTR7752F-30W-WW30G	30W	120x0.5W SMD2835	G3000K	RA90	2820	>0.9						
GTR7752F-30W-NW40G			G4000K	RA90	3200							
GTR7752F-30W-CW60G			G6000K	RA90	3380							
GTR7752F-30W-TW27G	2C@30W	84TW	WW27	CW60	RA90	2630				≥0.9		
GTR7752F-30W-RGBW27G	4C@30W	84RGBW	R	G	B	W				RA90	2630	≥0.5
GTR7752G-36W-WW30G	36W	140.5W SMD2835	G3000K	RA90	3380	>0.9						
GTR7752G-36W-NW40G			G4000K	RA90	3830							
GTR7752G-36W-CW60G			G6000K	RA90	4060							
GTR7752G-36W-TW27G	2C@36W	96TW	WW27	CW60	RA90	3160				≥0.9		
GTR7752G-36W-RGBW27G	4C@36W	96RGBW	R	G	B	W				RA90	3160	≥0.5
GTR7752H-45W-WW30G	45W	180x0.5W SMD2835	G3000K	RA90	3950	>0.9						
GTR7752H-45W-NW40G			G4000K	RA90	4470							
GTR7752H-45W-CW60G			G6000K	RA90	4740							
GTR7752H-45W-TW27G	2C@45W	126TW	WW27	CW60	RA90	3680				≥0.9		
GTR7752H-45W-RGBW27G	4C@45W	126RGBW	R	G	B	W				RA90	3680	≥0.5
GTR7752J-48W-WW30G	48W	216x0.5W SMD2835	G3000K	RA90	4510	>0.9						
GTR7752J-48W-NW40G			G4000K	RA90	5110							
GTR7752J-48W-CW60G			G6000K	RA90	5410							
GTR7752J-48W-TW27G	2C@48W	144TW	WW27	CW60	RA90	4200				≥0.9		
GTR7752J-48W-RGBW27G	4C@48W	144RGBW	R	G	B	W				RA90	4200	≥0.5