


LED POST TOP LIGHT

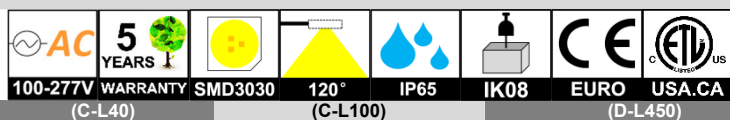

INTRODUCTION

FEATURE

Modern Post Top Area Lighting
Upgrade LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index >80
Long Lifespan >50,000hours
Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: CITIZEN & LUMILEDS
Driver Brand: GUBO
Housing: Die-casted Aluminum
Optics: High Efficiency PC Reflector
Diffuser: Clear Glass Diffuser

INSTALLATION

Installation: Post-Top Mount
Suitable for Road Light, like Street, Park.....

STANDARD


Designed and Manufactured to Comply with
CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class I Electric

OPTION


LED CCT: 1700K/2200K/2700K/3500K/5000K
[Post]: Height 1M/1.2M/3.5M/4.5M/6M
[CSC]: Photocell Sensor
Custom Housing Color Finish: (Any Colors in RAL)




DIMENSION: [UNIT: MM]

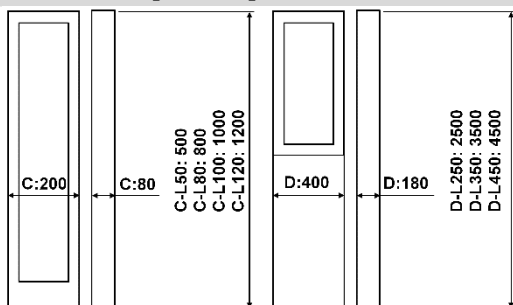

CASE STUDY: (C)

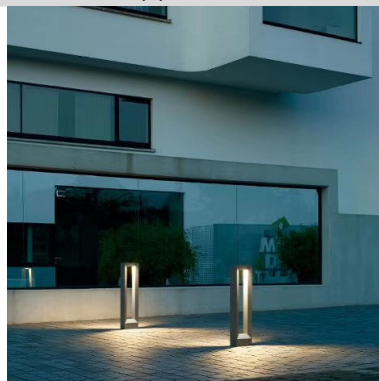

CASE STUDY: (D-L350)

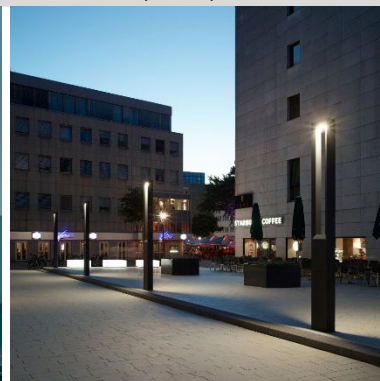

MODEL	POWER 【W】	LED TYPE	CCT 【K】	FLUX 【LM】	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT 【V】			
GTE2127C-10W-WW22	10W	36x1.5W SMD3030	2200K	1220	>0.9	BLR: T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]			
GTE2127C-10W-WW27			2700K	1270							
GTE2127C-10W-WW30			3000K	1310							
GTE2127C-10W-NW35			3500K	1350							
GTE2127C-10W-NW40			4000K	1410							
GTE2127C-10W-PW50			5000K	1410							
GTE2127C-10W-CW57			5700K	1410							
GTE2127C-20W-WW22	20W	36x1.5W SMD3030	2200K	2220	>0.9						
GTE2127C-20W-WW27			2700K	2310							
GTE2127C-20W-WW30			3000K	2380							
GTE2127C-20W-NW35			3500K	2460							
GTE2127C-20W-NW40			4000K	2570							
GTE2127C-20W-PW50			5000K	2570							
GTE2127C-20W-CW57			5700K	2570							
GTE2127C22-18W-TW	2C@18W	18TW	WW27	CW65	1440	>0.9					
GTE2127C42-18W-RGBW	4C@18W	18RGBW	R	G	B	W	>0.7				
GTE2127C42-18W-RGBA	4C@18W	18RGBA	R	G	B	A	>0.7				
GTE2127D-50W-WW22	50W	64x1.5W SMD3030	2200K	5560	>0.9	BLR: T5S: 60° T5M: 90° T5L: 120°					
GTE2127D-50W-WW27			2700K	5780							
GTE2127D-50W-WW30			3000K	5950							
GTE2127D-50W-NW35			3500K	6150							
GTE2127D-50W-NW40			4000K	6440							
GTE2127D-50W-PW50			5000K	6440							
GTE2127D-50W-CW57			5700K	6440							
GTE2127D22-48W-TW	2C@48W	24TW	WW27	CW65	3840				>0.9		
GTE2127D42-48W-RGBW	4C@48W	24RGBW	R	G	B				W	>0.7	
GTE2127D42-48W-RGBA	4C@48W	24RGBA	R	G	B				A	>0.7	

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

-P33-

Charlotte International Partners Inc.



T.: (803) 396.1439

A.: 1740 First Baxter Crossing, Fort Mill SC 29708

W.: www.ciplighting.com E: info@ciplighting.com