INTRODUCTION

LED POST TOP LIGHT



FEATURES
- Patent LED Lighting Design
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Elegance Daytime Appearance
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Driver Brand: MEANWELL
- Housing: Die-casted Aluminum Housing
- Optics: High Efficiency Lens
- Diffuser: Anti-UV PC Opal Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting Post:Φ76mm
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP66 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [POST]: Height 3.5M/4.5M/6M
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

CASE STUDY

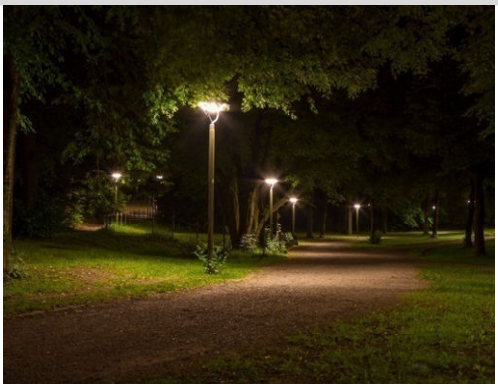

DIMENSION: 【UNIT: MM】

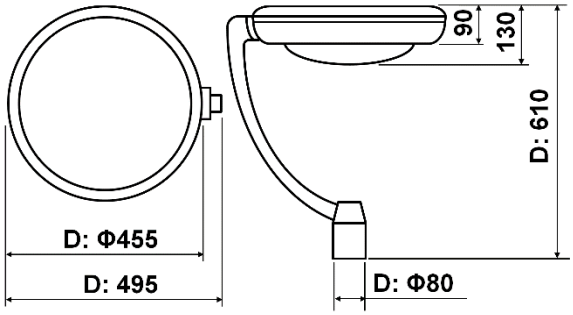

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2101D-30W-WW30	30W	72x1.5W SMD3030	3000K	2630	＞0.9	BRR: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2101D-30W-NW40			4000K	2860				
GTE2101D-30W-CW57			5700K	2860				
GTE2101D-40W-WW30	40W	72x1.5W SMD3030	3000K	3520	＞0.9			
GTE2101D-40W-NW40			4000K	3810				
GTE2101D-40W-CW57			5700K	3810				
GTE2101D-60W-WW30	60W	144x1.5W SMD3030	3000K	5270	＞0.9			
GTE2101D-60W-NW40			4000K	5720				
GTE2101D-60W-CW57			5700K	5720				
GTE2101D-80W-WW30	80W	144x1.5W SMD3030	3000K	7030	＞0.9			
GTE2101D-80W-NW40			4000K	7620				
GTE2101D-80W-CW57			5700K	7620				
GTE2101D22-80W-CCT	2C@80W	144CCT	WW / CW	7000	＞0.9			
GTE2101D31-72W-RGB	3C&24W	36RGB	R G B	2880	＞0.9			
GTE2101D32-72W-RGB	3C@72W	36RGB	R G B	3600	＞0.9			
GTE2101D41-96W-RGBW	4C&24W	36RGBW	R G B W	3840	＞0.9			
GTE2101D42-72W-RGBW	4C@72W	36RGB+72WW	R G B W	7000	＞0.9			

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT



INTRODUCTION

FEATURES
- Patent LED Lighting Design
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Driver Brand: MEANWELL
- Housing: Die-casted Aluminum Housing
- Optics: High Efficiency Lens
- Diffuser: Anti-UV PC Opal Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting Post:Φ76mm
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP66 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [POST]: Height 3.5M/4.5M/6M
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

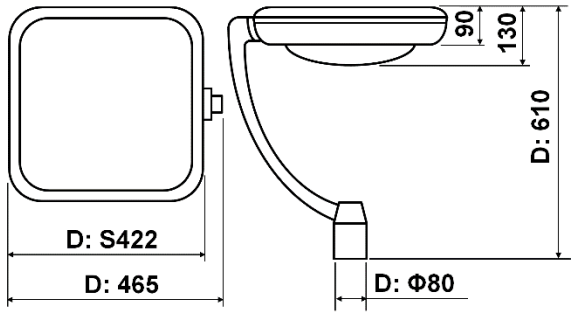

CASE STUDY

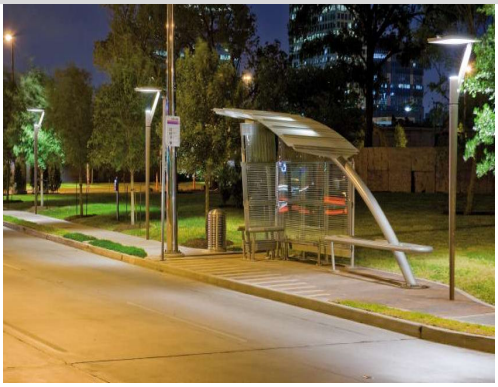

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2102D-30W-WW30	30W	72x1.5W SMD3030	3000K	2630	＞0.9	BRR: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2102D-30W-NW40			4000K	2860				
GTE2102D-30W-CW57			5700K	2860				
GTE2102D-40W-WW30	40W	72x1.5W SMD3030	3000K	3520	＞0.9			
GTE2102D-40W-NW40			4000K	3810				
GTE2102D-40W-CW57			5700K	3810				
GTE2102D-60W-WW30	60W	144x1.5W SMD3030	3000K	5270	＞0.9			
GTE2102D-60W-NW40			4000K	5720				
GTE2102D-60W-CW57			5700K	5720				
GTE2102D-80W-WW30	80W	144x1.5W SMD3030	3000K	7030	＞0.9			
GTE2102D-80W-NW40			4000K	7620				
GTE2102D-80W-CW57			5700K	7620				
GTE2102D22-80W-CCT	2C@80W	144CCT	WW CW	7000	＞0.9			
GTE2102D31-72W-RGB	3C&24W	36RGB	R G B	2880	＞0.9			
GTE2102D32-72W-RGB	3C@72W	36RGB	R G B	3600	＞0.9			
GTE2102D41-96W-RGBW	4C&24W	36RGBW	R G B W	3840	＞0.9			
GTE2102D42-72W-RGBW	4C@72W	36RGB+72WW	R G B W	7000	＞0.9			

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES

Modern Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Driver Brand: GUBO
Housing: Die-casted Aluminum Module
Optics: High Efficiency White PCB Reflector
Diffuser: Anti-UV PC Opal Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting: Φ76mmorΦ89mm Post
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP66 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[ADAPTOR]: Φ75mm or Φ89mm Post Adaptor
[POST]: Height 3.5M/4.5M/6M
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

TOPVIEW	FRONT VIEW	CUSTOMIZED

CASE STUDY:

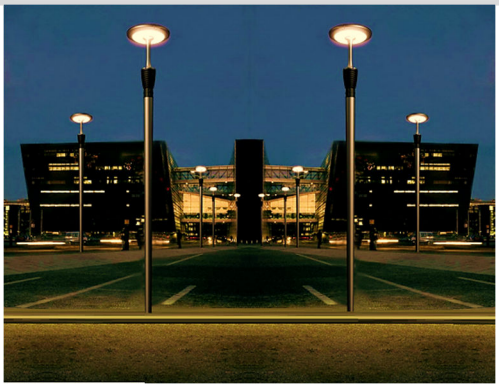

DIMENSION: 【UNIT: MM】

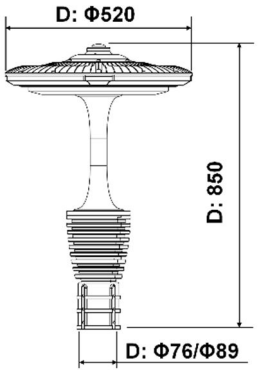

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2103D-30W-WW30	30W	144x1.5W SMD3030	3000K	2630	＞0.9	BRR: T5: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2103D-30W-NW40			4000K	2860				
GTE2103D-30W-CW57			5700K	2860				
GTE2103D-40W-WW30	40W	144x1.5W SMD3030	3000K	3520	＞0.9			
GTE2103D-40W-NW40			4000K	3810				
GTE2103D-40W-CW57			5700K	3810				
GTE2103D-60W-WW30	60W	144x1.5W SMD3030	3000K	5270	＞0.9			
GTE2103D-60W-NW40			4000K	5720				
GTE2103D-60W-CW57			5700K	5720				
GTE2103D-80W-WW30	80W	144x1.5W SMD3030	3000K	7030	＞0.9			
GTE2103D-80W-NW40			4000K	7620				
GTE2103D-80W-CW57			5700K	7620				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT



INTRODUCTION

FEATURES

Modern Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Driver Brand: GUBO
Housing: Die-casted Aluminum Module
Optics: High Efficiency White PCB Reflector
Diffuser: Transparent PrismatricPC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ76mm Post
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[POST]: Height 3.5M/4.5M
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

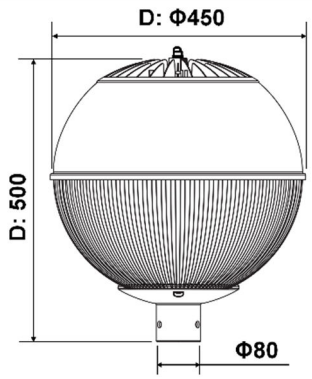

CASE STUDY

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2105D-30W-WW30	30W	72x1.5W SMD3030	3000K	2630	＞0.9	BRR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2105D-30W-NW40			4000K	2860				
GTE2105D-30W-CW57			5700K	2860				
GTE2105D-40W-WW30	40W	72x1.5W SMD3030	3000K	3520	＞0.9			
GTE2105D-40W-NW40			4000K	3810				
GTE2105D-40W-CW57			5700K	3810				
GTE2105D-50W-WW30	50W	72x1.5W SMD3030	3000K	4220	＞0.9			
GTE2105D-50W-NW40			4000K	4570				
GTE2105D-50W-CW57			5700K	4570				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES
- Modern Post Top Area Lighting
- Upgrade Module LED Lighting Design
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞70
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Driver Brand: MEANWELL
- Housing: Die-casted Aluminum Module
- Optics: High Efficiency PC Reflector
- Diffuser: Anti-UV Clear PC Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ60mm or Φ76mm Post
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP66 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [POST]: Height 3.5M/4.5M/6M
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]

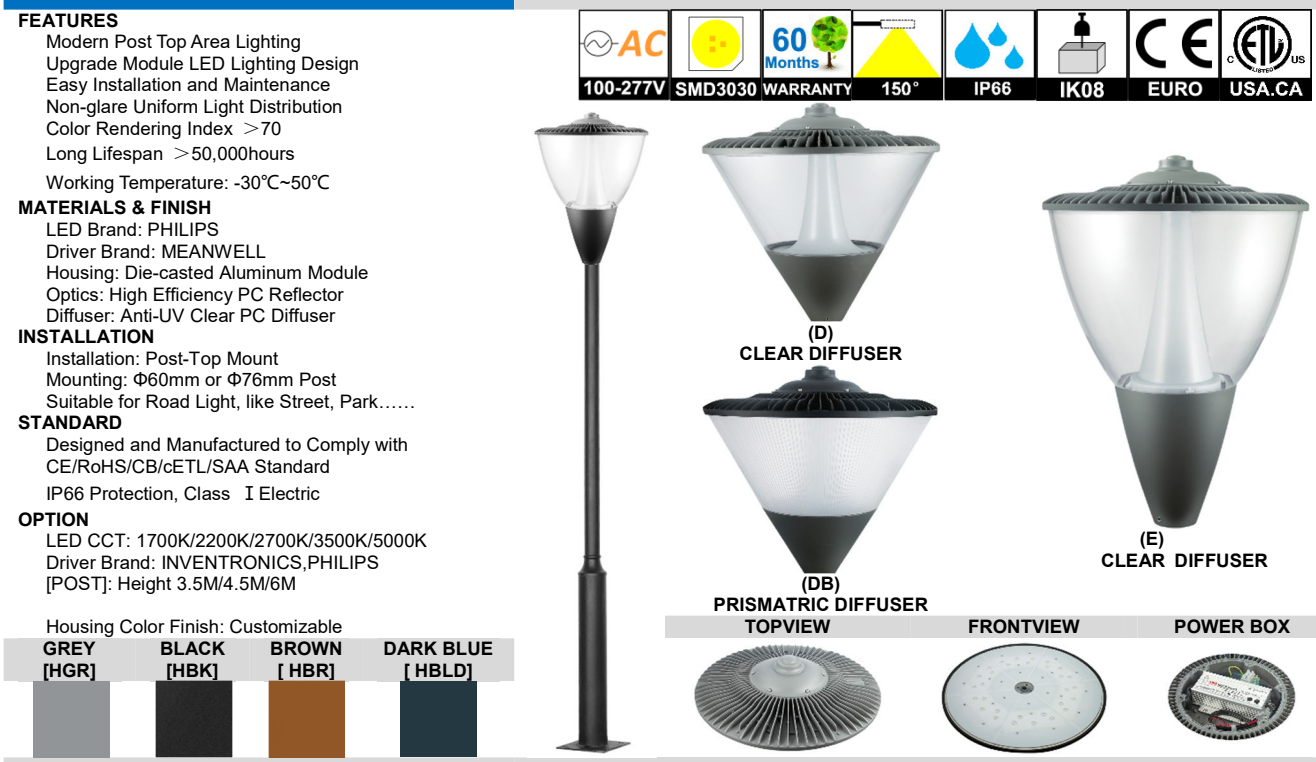

TOPVIEW	FRONTVIEW	POWER BOX

CASE STUDY:

DIMENSION: 【UNIT: MM】

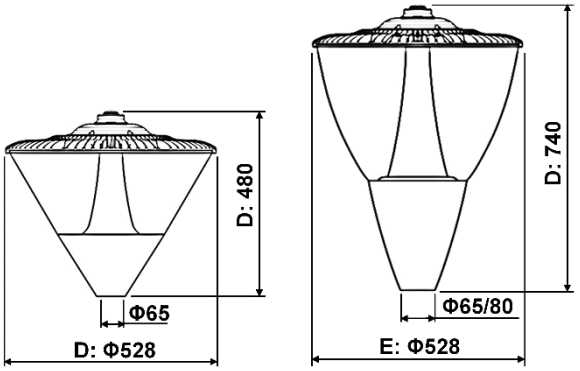

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2106D-30W-WW30	30W	30x5W CREE XTE	3000K	2670	＞0.9	BRR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2106D-30W-NW40			4000K	3030				
GTE2106D-30W-CW57			5700K	3420				
GTE2106D-40W-WW30	40W	30x5W CREE XTE	3000K	3280	＞0.9			
GTE2106D-40W-NW40			4000K	3720				
GTE2106D-40W-CW57			5700K	4240				
GTE2106D-60W-WW30	60W	60x5W CREE XTE	3000K	5100	＞0.9			
GTE2106D-60W-NW40			4000K	6560				
GTE2106D-60W-CW57			5700K	6540				
GTE2106D-80W-WW30	80W	60x5W CREE XTE	3000K	6480	＞0.9			
GTE2106D-80W-NW40			4000K	7360				
GTE2106D-80W-CW57			5700K	8400				
GTE2106DB-30W-WW30	30W	30x5W CREE XTE	3000K	2150	＞0.9	BRR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2106DB-30W-NW40			4000K	2420				
GTE2106DB-30W-CW57			5700K	2730				
GTE2106DB-40W-WW30	40W	30x5W CREE XTE	3000K	2620	＞0.9			
GTE2106DB-40W-NW40			4000K	2980				
GTE2106DB-40W-CW57			5700K	3390				
GTE2106DB-60W-WW30	60W	60x5W CREE XTE	3000K	4080	＞0.9			
GTE2106DB-60W-NW40			4000K	4610				
GTE2106DB-60W-CW57			5700K	5230				
GTE2106DB-80W-WW30	80W	60x5W CREE XTE	3000K	5180	＞0.9			
GTE2106DB-80W-NW40			4000K	5880				
GTE2106DB-80W-CW57			5700K	6720				
GTE2106E-30W-WW30	30W	30x5W CREE XTE	3000K	2670	＞0.9	BRR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2106E-30W-NW40			4000K	3030				
GTE2106E-30W-CW57			5700K	3420				
GTE2106E-40W-WW30	40W	30x5W CREE XTE	3000K	3280	＞0.9			
GTE2106E-40W-NW40			4000K	3720				
GTE2106E-40W-CW57			5700K	4240				
GTE2106E-60W-WW30	60W	60x5W CREE XTE	3000K	5100	＞0.9			
GTE2106E-60W-NW40			4000K	6560				
GTE2106E-60W-CW57			5700K	6540				
GTE2106E-80W-WW30	80W	60x5W CREE XTE	3000K	6480	＞0.9			
GTE2106E-80W-NW40			4000K	7360				
GTE2106E-80W-CW57			5700K	8400				

LED POST TOP LIGHT



(D)

(E)

(F)	(G)	(H)	POWER BOX

DIMENSION: 【UNIT: MM】

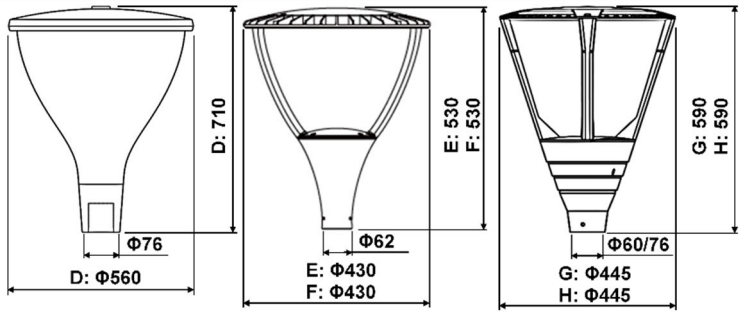

INTRODUCTION

FEATURES

Modern Post Top Area Lighting
Upgrade Module LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞70
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: CREE&PHILIPS
Driver Brand: MEANWELL
Housing: Die-casted Aluminum Module
Optics: High Efficiency PC Lens
(D/E)Diffuser: Anti-UV Clear PC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ76mm Post
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP66 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[POST]: Height 3.5M/4.5M/6M
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

CASE STUDY

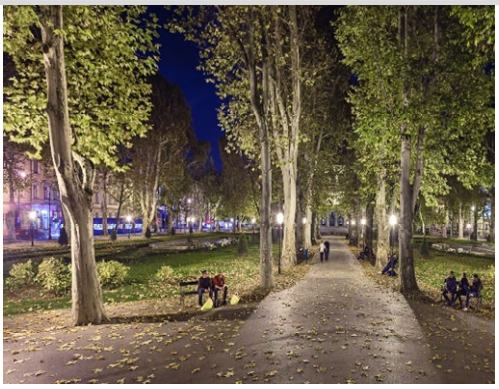

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2107D-35W-WW30	35W	30x5W CREE XTE	3000K	3410	＞0.9	BLP:(P15°): T2M: V70xH150° BLR: T5: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2107D-35W-NW40			4000K	3520				
GTE2107D-35W-CW57			5700K	3630				
GTE2107D-45W-WW30	45W	30x5W CREE XTE	3000K	4340	＞0.9			
GTE2107D-45W-NW40			4000K	4400				
GTE2107D-45W-CW57			5700K	4670				
GTE2107D-60W-WW30	60W	30x5W CREE XTE	3000K	5280	＞0.9			
GTE2107D-60W-NW40			4000K	5450				
GTE2107D-60W-CW57			5700K	5670				
GTE2107E(F)-60W-WW30	60W	72x1.5W SMD3030	3000K	6560	＞0.9			
GTE2107E(F)-60W-NW40			4000K	6750				
GTE2107E(F)-60W-CW57			5700K	6750				
GTE2107E(F)-80W-WW30	80W	108x1.5W SMD3030	3000K	8400	＞0.9			
GTE2107E(F)-80W-NW40			4000K	8640				
GTE2107E(F)-80W-CW57			5700K	8640				
GTE2107G(H)-40W-WW30	40W	48x1.5W SMD3030	3000K	4400	＞0.9			
GTE2107G(H)-40W-NW40			4000K	4550				
GTE2107G(H)-40W-CW57			5700K	4550				
GTE2107G(H)-60W-WW30	60W	72x1.5W SMD3030	3000K	6560	＞0.9			
GTE2107G(H)-60W-NW40			4000K	6750				
GTE2107G(H)-60W-CW57			5700K	6750				
GTE2107G(H)-80W-WW30	80W	96x1.5W SMD3030	3000K	8400	＞0.9			
GTE2107G(H)-80W-NW40			4000K	8640				
GTE2107G(H)-80W-CW57			5700K	8640				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT



FEATURES

Modern Post Top Area Lighting
Upgrade Module LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞70
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Driver Brand: GUBO
Housing: Die-casted Aluminum Module
Optics: High Efficiency PC Reflector
Diffuser: Transparent PrismatricPC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ76mm Post
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[Post]: Height 0.8M/1.M/1.2M/3.5M/4.5M/6M
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]

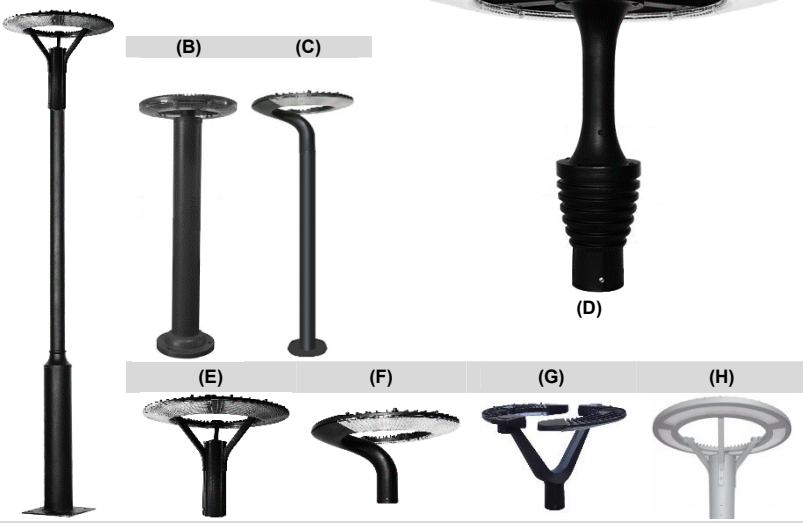

CASE STUDY:

DIMENSION: 【UNIT: MM】

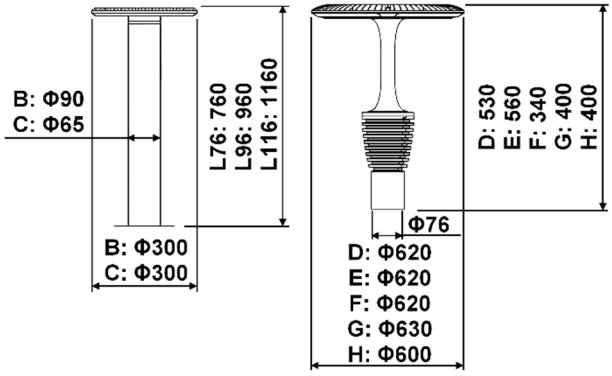

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2108B-15W-WW30	15W	54x1.5W SMD3030	3000K	1230	＞0.9	BRR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2108B-15W-NW40			4000K	1330				
GTE2108B-15W-CW57			5700K	1330				
GTE2108C-15W-WW30	15W	36x1.5W SMD3030	3000K	1230	＞0.9			
GTE2108C-15W-NW40			4000K	1330				
GTE2108C-15W-CW57			5700K	1330				
GTE2108D(E/H)-30W-WW30	30W	108x1.5W SMD3030	3000K	2630	＞0.9	(D/E) BRR: T5: 150° (H) BRR: T5: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2108D(E/H)-30W-NW40			4000K	2860				
GTE2108D(E/H)-30W-CW57			5700K	2860				
GTE2108D(E/H)-40W-WW30	40W	108x1.5W SMD3030	3000K	3520	＞0.9			
GTE2108D(E/H)-40W-NW40			4000K	3810				
GTE2108D(E/H)-40W-CW57			5700K	3810				
GTE2108D(E/H)-60W-WW30	60W	108x1.5W SMD3030	3000K	5620	＞0.9			
GTE2108D(E/H)-60W-NW40			4000K	5720				
GTE2108D(E/H)-60W-CW57			5700K	5720				
GTE2108D(E/H)-80W-WW30	80W	108x1.5W SMD3030	3000K	7030	＞0.9			
GTE2108D(E/H)-80W-NW40			4000K	7620				
GTE2108D(E/H)-80W-CW57			5700K	7620				
GTE2108F(G)-30W-WW30	30W	96x1.5W SMD3030	3000K	2630	＞0.9	BRR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2108F(G)-30W-NW40			4000K	2860				
GTE2108F(G)-30W-CW57			5700K	2860				
GTE2108F(G)-40W-WW30	40W	96x1.5W SMD3030	3000K	3520	＞0.9			
GTE2108F(G)-40W-NW40			4000K	3810				
GTE2108F(G)-40W-CW57			5700K	3810				
GTE2108F(G)-60W-WW30	60W	96x1.5W SMD3030	3000K	5620	＞0.9			
GTE2108F(G)-60W-NW40			4000K	5720				
GTE2108F(G)-60W-CW57			5700K	5720				

LED POST TOP LIGHT



(D)

INTRODUCTION

FEATURES
- Modern Post Top Area Lighting
- Upgrade Module LED Lighting Design
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Remote Driver Brand: GUBO
- Housing: Die-casted Aluminum Module
- Optics: High Efficiency PC Reflector
- Diffuser: Anti-UV Clear PC Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ60mm or Φ76mm Post
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [POST]: Height 3.5M/4.5M/6M/8M
- Housing Color Finish: Customizable

(E)	(F)	HEAT SINK

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

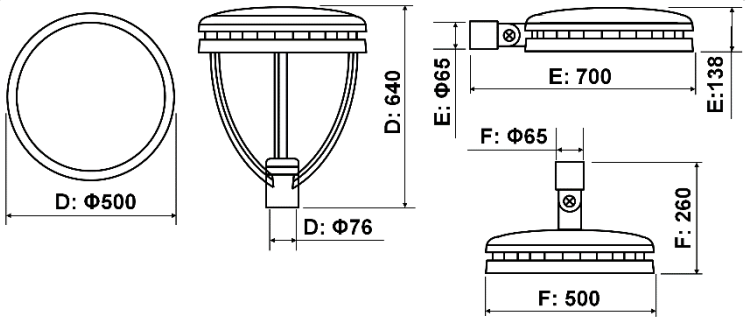

CASE STUDY

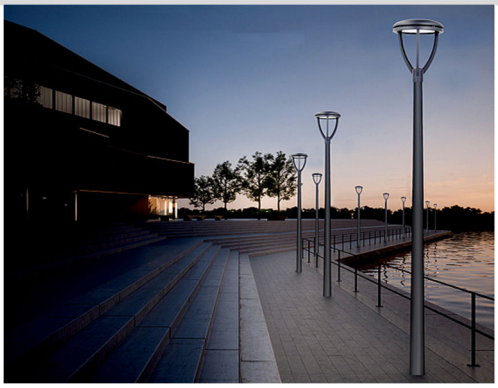

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2109D-80W-WW30	80W	192x1.5W SMD3030	3000K	7970	＞0.9	BLP:(P15°): T2M: V65xH145° T3M: V80xH150° T4S: V85xH135° BLR: T5S: 60° T5M: 90° BLV: 80x160°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2109D-80W-NW40			4000K	8640				
GTE2109D-80W-CW57			5700K	8640				
GTE2109D-120W-WW30	120W	192x1.5W SMD3030	3000K	13090	＞0.9			
GTE2109D-120W-NW40			4000K	14190				
GTE2109D-120W-CW57			5700K	14190				
GTE2109D-150W-WW30	150W	192x1.5W SMD3030	3000K	14910	＞0.9			
GTE2109D-150W-NW40			4000K	16140				
GTE2109D-150W-CW57			5700K	16140				
GTE2109D-80W-WW30	80W	80x5W CREE XTE	3000K	6680	＞0.9	BLP:(P15°): T2M: V65xH145°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2109D-80W-NW40			4000K	8020				
GTE2109D-80W-CW57			5700K	8430				
GTE2109D-120W-WW30	120W	80x5W CREE XTE	3000K	10430	＞0.9			
GTE2109D-120W-NW40			4000K	12520				
GTE2109D-120W-CW57			5700K	13160				
GTE2109D-150W-WW30	150W	80x5W CREE XTE	3000K	12030	＞0.9			
GTE2109D-150W-NW40			4000K	14440				
GTE2109D-150W-CW57			5700K	15180				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT



FEATURES

Modern Post Top Area Lighting
Upgrade Module LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Driver Brand: GUBO
Housing: Die-casted Aluminum
Optics: White PCB Reflecting
Diffuser: PC Opal Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ60mm Post
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[Post]: Height 0.8M/1.M/1.2M/3.5M/4.5M/6M
[CSC]: Photocell Sensor
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]

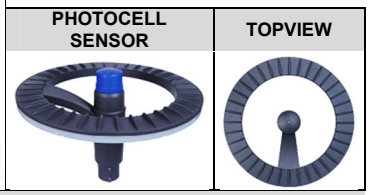

CASE STUDY:

DIMENSION: 【UNIT: MM】

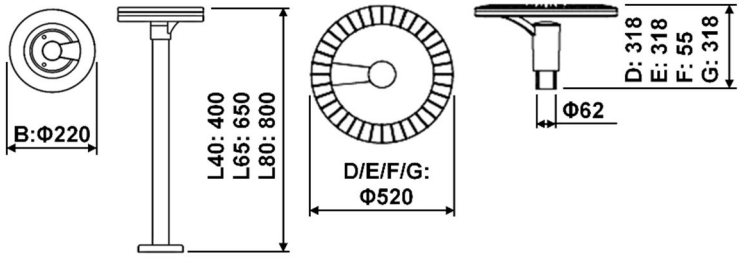

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2110B-10W-WW30	10W	18x1.5W SMD3030	3000K	650	＞0.9	BRR: T5: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2110B-10W-NW40			4000K	680				
GTE2110B-10W-CW57			5700K	680				
GTE2110D(E/F/G)-30W-WW30	30W	60x1.5W SMD3030	3000K	2330	＞0.9			
GTE2110D(E/F/G)-30W-NW40			4000K	2360				
GTE2110D(E/F/G)-30W-CW57			5700K	2360				
GTE2110D(E/F/G)-40W-WW30	40W	60x1.5W SMD3030	3000K	3120	＞0.9			
GTE2110D(E/F/G)-40W-NW40			4000K	3210				
GTE2110D(E/F/G)-40W-CW57			5700K	3210				
GTE2110D(E/F/G)-60W-WW30	60W	108x1.5W SMD3030	3000K	4020	＞0.9			
GTE2110D(E/F/G)-60W-NW40			4000K	4120				
GTE2110D(E/F/G)-60W-CW57			5700K	4120				
GTE2110D(E/F/G)-80W-WW30	80W	108x1.5W SMD3030	3000K	5350	＞0.9			
GTE2110D(E/F/G)-80W-NW40			4000K	5520				
GTE2110D(E/F/G)-80W-CW57			5700K	5520				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT



FRONTVIEW TOPVIEW

DIMENSION: 【UNIT: MM】

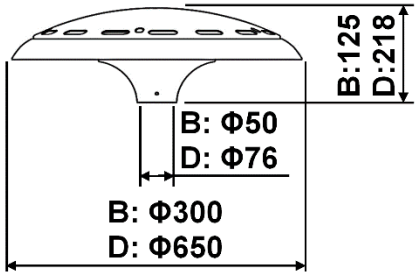

INTRODUCTION

FEATURES
- Modern Post Top Area Lighting
- Upgrade Module LED Lighting Design
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Remote Driver Brand: GUBO
- Housing: Die-casted Aluminum Module
- Optics: White PCB Reflecting
- Diffuser: Anti-UV PC Opal Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ60mm or Φ76mm Post
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP66 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [POST]: Height 0.8M/1M/2.2M/3.5M/4.5M/6M
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

CASE STUDY

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2111B-10W-WW30	10W	10x5W CREE XTE	3000K	880	＞0.9	BLR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2111B-10W-NW40			4000K	890				
GTE2111B-10W-CW57			5700K	900				
GTE2111B-15W-WW30	15W	10x5W CREE XTE	3000K	1300	＞0.9			
GTE2111B-15W-NW40			4000K	1315				
GTE2111B-15W-CW57			5700K	1330				
GTE2111B-20W-WW30	20W	10x5W CREE XTE	3000K	1710	＞0.9			
GTE2111B-20W-NW40			4000K	1730				
GTE2111B-20W-CW57			5700K	1760				
GTE2111B2-20W-WW30	20W	36x1.5W SMD3030	3000K	2100	＞0.9			
GTE2111B2-20W-NW40			4000K	2200				
GTE2111B2-20W-CW57			5700K	2200				
GTE2111D-40W-WW30	40W	20x5W CREE XTE	3000K	3740	＞0.9			
GTE2111D-40W-NW40			4000K	3850				
GTE2111D-40W-CW57			5700K	3960				
GTE2111D-60W-WW30	60W	20x5W CREE XTE	3000K	5330	＞0.9			
GTE2111D-60W-NW40			4000K	5500				
GTE2111D-60W-CW57			5700K	5680				
GTE2111D2-60W-WW30	60W	120x1.5W SMD3030	3000K	6300	＞0.9			
GTE2111D2-60W-NW40			4000K	6600				
GTE2111D2-60W-CW57			5700K	6600				
GTE2111D2-80W-WW30	80W	120x1.5W SMD3030	3000K	8400	＞0.9			
GTE2111D2-80W-NW40			4000K	8800				
GTE2111D2-80W-CW57			5700K	8800				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES
- Modern Post Top Area Lighting
- Upgrade Module LED Lighting Design
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- (D)Optics: White PCB Reflecting
- (D)Diffuser: PC Opal Diffuser
- (E)Optics: White PCB Reflecting
- (E)Diffuser: Tempered Clear Glass Diffuser
- (F)Optics: Reflector and Secondary Reflecting

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ76mm Post
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [Post]: Height 2.5M/3.5M/4.5M/6M
- [CSC]: Photocell Sensor
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]



(D) (E) (D)

(F) REFLECTING

CASE STUDY:

DIMENSION: 【UNIT: MM】

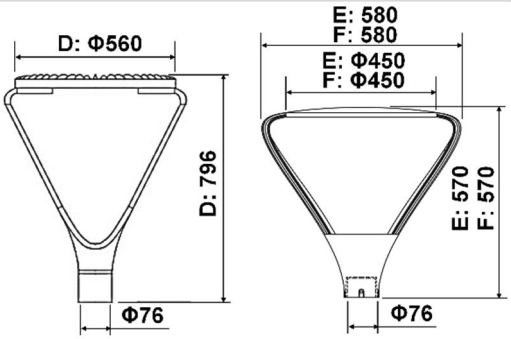

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2112D-30W-WW30	30W	120x1.5W SMD3030	3000K	3120	＞0.9	BLR: T5: 120°	0/1-10V&TRIAC DMX512&DALI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2112D-30W-NW40			4000K	3210				
GTE2112D-30W-CW57			5700K	3210				
GTE2112D-40W-WW30	40W	120x1.5W SMD3030	3000K	4020	＞0.9			
GTE2112D-40W-NW40			4000K	4120				
GTE2112D-40W-CW57			5700K	4120				
GTE2112D-60W-WW30	60W	120x1.5W SMD3030	3000K	6220	＞0.9			
GTE2112D-60W-NW40			4000K	6450				
GTE2112D-60W-CW57			5700K	6450				
GTE2112D-80W-WW30	80W	120x1.5W SMD3030	3000K	8035	＞0.9			
GTE2112D-80W-NW40			4000K	8280				
GTE2112D-80W-CW57			5700K	8280				
GTE2112E-30W-WW30	30W	72x1.5W SMD3030	3000K	3850	＞0.9			
GTE2112E-30W-NW40			4000K	4050				
GTE2112E-30W-CW57			5700K	4050				
GTE2112E-60W-WW30	60W	144x1.5W SMD3030	3000K	7630	＞0.9			
GTE2112E-60W-NW40			4000K	8100				
GTE2112E-60W-CW57			5700K	8100				
GTE2112E-100W-WW30	100W	192x1.5W SMD3030	3000K	12200	＞0.9			
GTE2112E-100W-NW40			4000K	13000				
GTE2112E-100W-CW57			5700K	13000				
GTE2112F-30W-WW30	30W	CXA2530 CREE COB	3000K	2200	＞0.9			
GTE2112F-30W-NW40			4000K	2350				
GTE2112F-30W-CW57			5700K	2420				

LED POST TOP LIGHT



(D)

(F)

(G)

(L)

(J)CATENARY

(M)

(N)

INTRODUCTION

FEATURES

Modern Post Top Area Lighting
Upgrade Module LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Remote Driver Brand: GUBO
Housing: Die-casted Aluminum
Optics: High Effiency PC Lens
Diffuser: Tempred Clear Glass Diffuser
(F)Diffuser: Clear PC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting: Φ60mm or Φ76mm Post
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP66 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[POST]: Height 2.2M/3.5M/4.5M/6M

Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

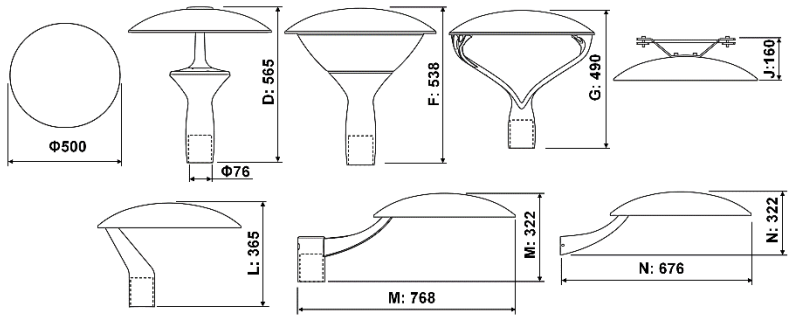

CASE STUDY

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2113D-30W-WW30	30W	48x1.5W SMD3030	3000K	1480	＞0.9	BLR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2113D-30W-NW40			4000K	1550				
GTE2113D-30W-CW57			5700K	1550				
GTE2113D-60W-WW30	60W	72x1.5W SMD3030	3000K	3020	＞0.9			
GTE2113D-60W-NW40			4000K	3170				
GTE2113D-60W-CW57			5700K	3170				
GTE2113F(G/J)-30W-WW30	30W	48x1.5W SMD3030	3000K	2450	＞0.9	BLR: T5: 120°		
GTE2113F(G/J)-30W-NW40			4000K	2570				
GTE2113F(G/J)-30W-CW57			5700K	2570				
GTE2113F(G/J)-60W-WW30	60W	72x1.5W SMD3030	3000K	4950	＞0.9			
GTE2113F(G/J)-60W-NW40			4000K	5190				
GTE2113F(G/J)-60W-CW57			5700K	5190				
GTE2113F(G/J)-90W-WW30	90W	108x1.5W SMD3030	3000K	7430	＞0.9			
GTE2113F(G/J)-90W-NW40			4000K	7800				
GTE2113F(G/J)-90W-CW57			5700K	7800				
GTE2113L(M/N)-30W-WW30	30W	48x1.5W SMD3030	3000K	3020	＞0.9	BLP: (P15°) T2S: V45xH120° T2M: V60xH145° T3S: V40xH145° T3M: V80xH150°		
GTE2113L(M/N)-30W-NW40			4000K	3170				
GTE2113L(M/N)-30W-CW57			5700K	3170				
GTE2113L(M/N)-60W-WW30	60W	72x1.5W SMD3030	3000K	6110	＞0.9			
GTE2113L(M/N)-60W-NW40			4000K	6420				
GTE2113L(M/N)-60W-CW57			5700K	6420				

INTRODUCTION

LED POST TOP LIGHT



FEATURES
- Modern Post Top Area Lighting
- Upgrade LED Lighting Design
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: CREE
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Optics: Quadric Dome Reflector
- Diffuser: Clear PC Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ60mm Post
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [Post]: Height 1M/1.2M/3.5M/4.5M/6M
- [CSC]: Photocell Sensor
- Housing Color Finish: Customizable

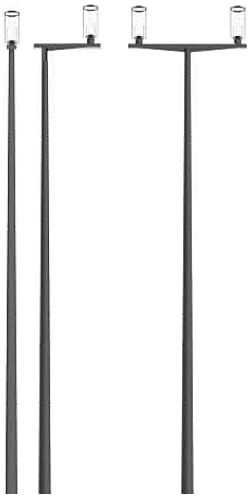

(D)

(E)

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]

(D)LIGHTING

(E)LIGHTING

(DW)

CASE STUDY:

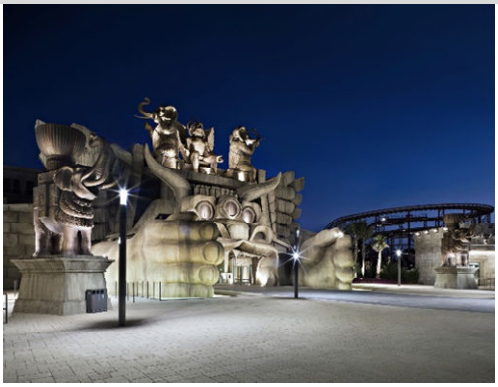

DIMENSION: 【UNIT: MM】

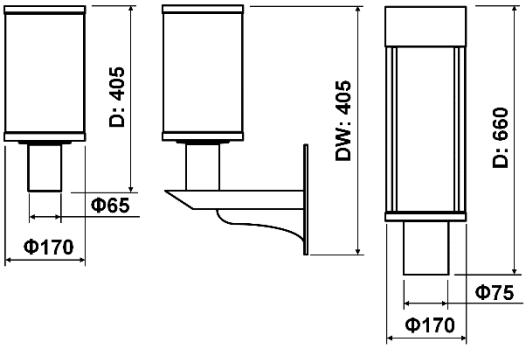

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2115D-20W-WW30	20W	CXA2520 CREE COB	3000K	1480	＞0.9	BRR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2115D-20W-NW40			4000K	1540				
GTE2115D-20W-CW57			5700K	1580				
GTE2115D-30W-WW30	30W	CXA2530 CREE COB	3000K	2330	＞0.9			
GTE2115D-30W-NW40			4000K	2320				
GTE2115D-30W-CW57			5700K	2360				
GTE2115E-50W-WW30	50W	60x1.5W SMD3030	3000K	4150	＞0.9	BRR: T5: 120°		
GTE2115E-50W-NW40			4000K	4500				
GTE2115E-50W-CW57			5700K	4500				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT



INTRODUCTION

FEATURES

Modern Post Top Area Lighting
Upgrade Module LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Remote Driver Brand: GUBO
Housing: Die-casted Aluminum Module
Optics: High Efficiency PC Reflector
Optics: White PCB Reflecting
Diffuser: Anti-UV PC Opal Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting: Φ60mm or Φ76mm Post
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP66 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[POST]: Height 1M/1.2M/2.2M/3.5M/4.5M
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

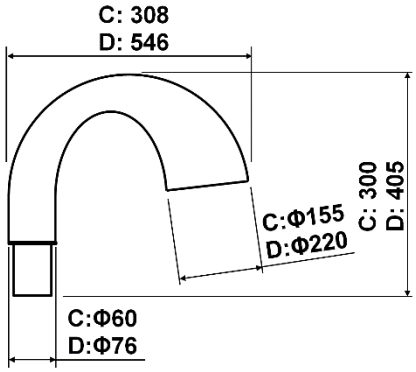

CASE STUDY: BOLLARD

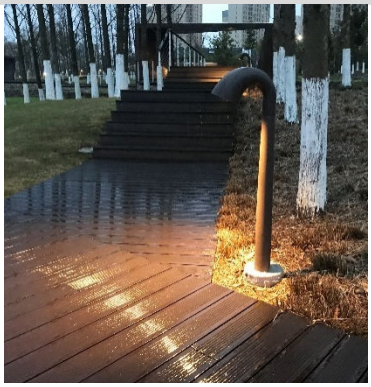

CASE STUDY: POST

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2116C-10W-WW30	10W	CXA1512 CREE COB	3000K	880	＞0.9	BRR: 24/38/60°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2116C-10W-NW40			4000K	910				
GTE2116C-10W-CW57			5700K	930				
GTE2116D-30W-WW30	30W	CXA2530 CREE COB	3000K	2480	＞0.9	BLR: 24/38/60°		
GTE2116D-30W-NW40			4000K	2580				
GTE2116D-30W-CW57			5700K	2640				
GTE2116D-40W-WW30	40W	CXA2530 CREE COB	3000K	3000	＞0.9			
GTE2116D-40W-NW40			4000K	3100				
GTE2116D-40W-CW57			5700K	3190				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES

Modern Post Top Area Lighting
Upgrade LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Driver Brand: GUBO
Housing: Die-casted Aluminum
Optics: Aluminum Reflector
(C/D)Diffuser: Clear PC Diffuser
(E/F/G)Diffuser: PC Opal Diffuser

INSTALLATION

Installation: Post-Top Mount
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[Post]: Height 1M/1.2M/3.5M/4.5M/6M
[CSC]: Photocell Sensor
Housing Color Finish: Customizable



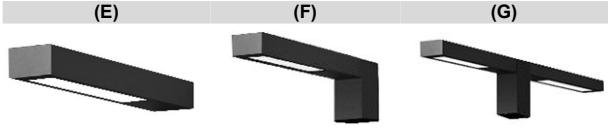

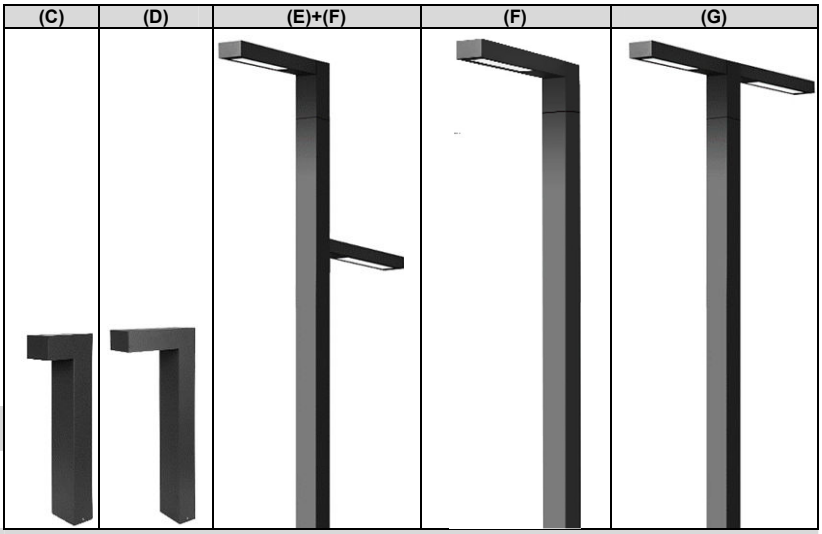

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]

CASE STUDY:

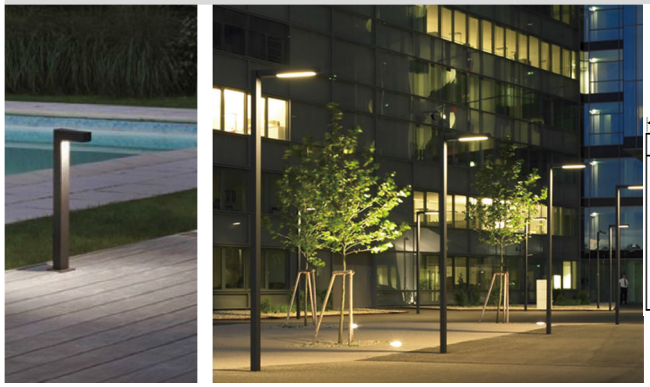

DIMENSION: 【UNIT: MM】

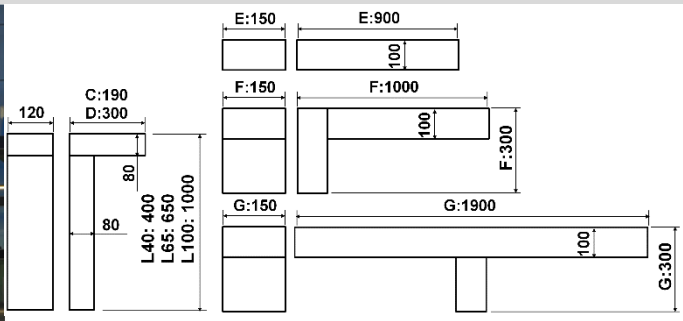

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2117C-6W-WW30	6W	12x1.5W SMD3030	3000K	600	＞0.9	BRR: T5: 90°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2117C-6W-NW40			4000K	620				
GTE2117C-6W-CW57			5700K	620				
GTE2117D-10W-WW30	10W	18x1.5W SMD3030	3000K	1000	＞0.9	BRR: T5: 90°		
GTE2117D-10W-NW40			4000K	1050				
GTE2117D-10W-CW57			5700K	1050				
GTE2117E-50W-WW30	50W	1x64x1.5W SMD3030	3000K	5950	＞0.9	BLP:(P15°): T3M: V80xH150° BLR: T5V: 30° T5S: 60° T5M: 90° BLV: 90x120°		
GTE2117E-50W-NW40			4000K	6440				
GTE2117E-50W-CW57			5700K	6440				
GTE2117F-50W-WW30	50W	1x64x1.5W SMD3030	3000K	5950	＞0.9			
GTE2117F-50W-NW40			4000K	6440				
GTE2117F-50W-CW57			5700K	6440				
GTE2117G-100W-WW30	100W	2x64x1.5W SMD3030	3000K	2x4000	＞0.9			
GTE2117G-100W-NW40			4000K	2x4120				
GTE2117G-100W-CW57			5700K	2x4120				
GTE2117E2-50W-WW30	50W	1x28x6W SMD5050	3000K	7250	＞0.9	BLP:(P15°): T3M: V80xH150° BLR: T5V: 30° T5S: 60° T5M: 90° BLV: 90x120°		
GTE2117E2-50W-NW40			4000K	7550				
GTE2117E2-50W-CW57			5700K	7550				
GTE2117F2-50W-WW30	50W	1x28x6W SMD5050	3000K	7250	＞0.9			
GTE2117F2-50W-NW40			4000K	7550				
GTE2117F2-50W-CW57			5700K	7550				
GTE2117G2-80W-WW30	100W	2x28x6W SMD5050	3000K	2x7250	＞0.9			
GTE2117G2-80W-NW40			4000K	2x7550				
GTE2117G2-80W-CW57			5700K	2x7550				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

LED POST TOP LIGHT



INTRODUCTION

FEATURES

Modern Post Top Area Lighting
Upgrade Module LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: CREE
Driver Brand: INVENTRONICS
Housing: Die-casted Aluminum
Optics: White Nano Reflector
Diffuser: Anti-UV Ribbed Clear PC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting: Φ48mm Post
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[POST]: Height 2.2M/3.5M/4.5M/6M
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

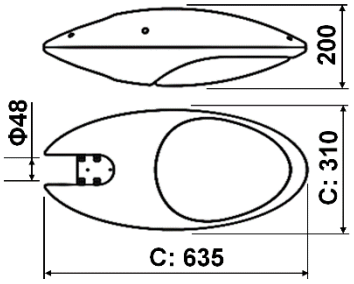

CASE STUDY

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2118C-30W-WW30	30W	24x5W CREE XTE	3000K	2400	＞0.9	BLR: T5: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2118C-30W-NW40			4000K	2550				
GTE2118C-30W-CW57			5700K	2730				
GTE2118C-50W-WW30	50W	24x5W CREE XTE	3000K	4000	＞0.9			
GTE2118C-50W-NW40			4000K	4220				
GTE2118C-50W-CW57			5700K	4550				
GTE2118C-70W-WW30	70W	32x5W CREE XTE	3000K	5510	＞0.9			
GTE2118C-70W-NW40			4000K	5860				
GTE2118C-70W-CW57			5700K	6260				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES
- Modern Post Top Area Lighting
- Simple Elgance Uniform Structure
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: CREE
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Heat Sink: Die-casted Aluminum Module
- Optics: High Efficieny PC Lens
- Diffuser: Clear Tempered Glass Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ76mm Post
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [Post]: Height 2.5M/3.5M/4.5M/6M
- [CSC]: Photocell Sensor
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]



(D)

(E) (F) INNERVIEW

CASE STUDY:

DIMENSION: 【UNIT: MM】







MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2119D-30W-WW30	30W	28x5W CREE XTE	3000K	2400	＞0.9	BLP:(P15°): T2M: V70xH150° BLV: 90x150° BLR: T5L: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2119D-30W-NW40			4000K	2550				
GTE2119D-30W-CW57			5700K	2730				
GTE2119D-45W-WW30	45W	28x5W CREE XTE	3000K	4000	＞0.9			
GTE2119D-45W-NW40			4000K	4220				
GTE2119D-45W-CW57			5700K	4550				
GTE2119D-60W-WW30	60W	28x5W CREE XTE	3000K	5510	＞0.9			
GTE2119D-60W-NW40			4000K	5860				
GTE2119D-60W-CW57			5700K	6260				
GTE2119E-30W-WW30	30W	28x5W CREE XTE	3000K	2400	＞0.9			
GTE2119E-30W-NW40			4000K	2550				
GTE2119E-30W-CW57			5700K	2730				
GTE2119E-45W-WW30	45W	28x5W CREE XTE	3000K	4000	＞0.9			
GTE2119E-45W-NW40			4000K	4220				
GTE2119E-45W-CW57			5700K	4550				
GTE2119E-60W-WW30	60W	28x5W CREE XTE	3000K	5510	＞0.9			
GTE2119E-60W-NW40			4000K	5860				
GTE2119E-60W-CW57			5700K	6260				
GTE2119F-30W-WW30	30W	28x5W CREE XTE	3000K	2400	＞0.9			
GTE2119F-30W-NW40			4000K	2550				
GTE2119F-30W-CW57			5700K	2730				
GTE2119F-45W-WW30	45W	28x5W CREE XTE	3000K	4000	＞0.9			
GTE2119F-45W-NW40			4000K	4220				
GTE2119F-45W-CW57			5700K	4550				
GTE2119F-60W-WW30	60W	28x5W CREE XTE	3000K	5510	＞0.9			
GTE2119F-60W-NW40			4000K	5860				
GTE2119F-60W-CW57			5700K	6260				

LED POST TOP LIGHT



INTRODUCTION

FEATURES
- Modern Post Top Area Lighting
- Upgrade Module LED Lighting Design
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Internal Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Optics: High Efficiency Glass Lens

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ76mm Post
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- LED Brand: CREE, BRIDGELUX
- [POST]: Height 1M/1.2M/2.2M/3.5M/4.5M
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]

DIMENSION: 【UNIT: MM】

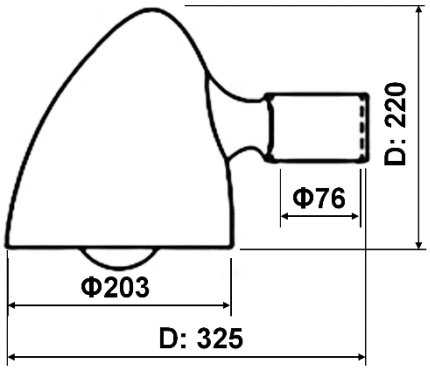

CASE STUDY: POST

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2121D-35W-WW22	35W	45x1.5W SMD3030	2200K	2620	＞0.9	BLP:(P15°): T3M: V75xH150° BLR: T5S: 60° T5M: 90° T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC36V]
GTE2121D-35W-WW27			2700K	3080				
GTE2121D-35W-WW30			3000K	3170				
GTE2121D-35W-NW35			3500K	3260				
GTE2121D-35W-NW40			4000K	3430				
GTE2121D-35W-PW50			5000K	3430				
GTE2121D-35W-CW57			5700K	3430				
GTE2121D-35W-CW57			5700K	3430				
GTE2121D22-35W-CCT	2C@35W	50CCT	WW CW	2650	＞0.9			
GTE2121D32-30W-RGB	3C@30W	40RGB	R G B	1800	＞0.9			
GTE2121D42-30W-RGBW	4C@30W	30RGBW	R G B W	2100	＞0.9			

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT



FEATURES

Modern Post Top Area Lighting
Upgrade LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Driver Brand: MEANWELL
Housing: Die-casted Aluminum
Optics: High Efficiency PC Lens

INSTALLATION

Installation: Post-Top Mount
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[Post]: Height 1M/1.2M/3.5M/4.5M/6M
[CSC]: Photocell Sensor
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]

CASE STUDY:

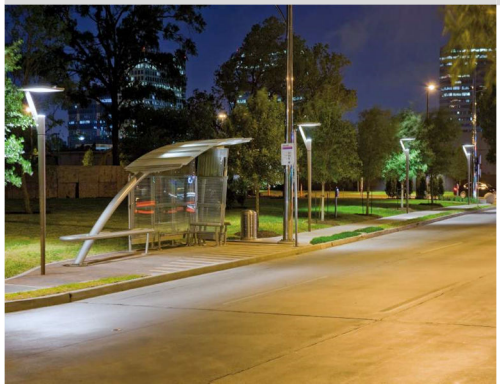

DIMENSION: 【UNIT: MM】

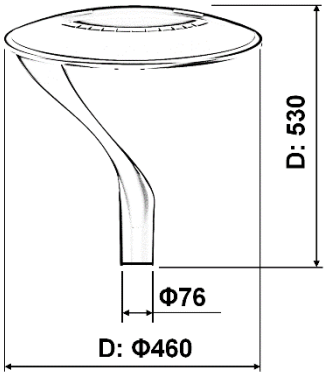

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2122D-40W-WW22	40W	66x1.5W SMD3030	2200K	3280	＞0.9	BLR: T5M: 90°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC36V]
GTE2122D-40W-WW27			2700K	3860				
GTE2122D-40W-WW30			3000K	3940				
GTE2122D-40W-NW35			3500K	4070				
GTE2122D-40W-NW40			4000K	4280				
GTE2122D-40W-PW50			5000K	4280				
GTE2122D-40W-CW57			5700K	4280				
GTE2122D-40W-CW57			5700K	4280				
GTE2122D-60W-WW22	60W	66x1.5W SMD3030	2200K	4530	＞0.9			
GTE2122D-60W-WW27			2700K	5320				
GTE2122D-60W-WW30			3000K	5510				
GTE2122D-60W-NW35			3500K	5630				
GTE2122D-60W-NW40			4000K	5910				
GTE2122D-60W-PW50			5000K	5910				
GTE2122D-60W-CW57			5700K	5910				
GTE2122D-60W-CW57			5700K	5910				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT



(D) (E)

INTRODUCTION

FEATURES

Modern Post Top Area Lighting
Upgrade Module LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: CREE
Driver Brand: INVENTRONICS
Housing: Die-casted Aluminum
Optics: High Efficieny PC Lens
Diffuser: Anti-UV Clear PC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting: Φ48mm Post
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP66 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: MEANWELL, PHILIPS
[POST]: Height 2.2M/3.5M/4.5M/6M
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】





CASE STUDY

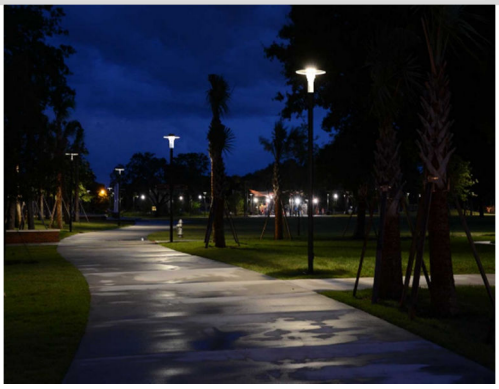

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2123D-40W-WW27	40W	72x1.5W SMD3030	2700K	3860	＞0.9	BLR: T5M: 90°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC36V]
GTE2123D-40W-WW30			3000K	3940				
GTE2123D-40W-NW40			4000K	4280				
GTE2123D-40W-PW50			5000K	4280				
GTE2123D-40W-CW57			5700K	4280				
GTE2123D-60W-WW27	60W	72x1.5W SMD3030	2700K	5320	＞0.9			
GTE2123D-60W-WW30			3000K	5510				
GTE2123D-60W-NW40			4000K	5910				
GTE2123D-60W-PW50			5000K	5910				
GTE2123D-60W-CW57			5700K	5910				
GTE2123E-40W-WW27	40W	108x1.5W SMD3030	2700K	3860	＞0.9			
GTE2123E-40W-WW30			3000K	3940				
GTE2123E-40W-NW40			4000K	4280				
GTE2123E-40W-PW50			5000K	4280				
GTE2123E-40W-CW57			5700K	4280				
GTE2123E-60W-WW27	60W	108x1.5W SMD3030	2700K	5320	＞0.9			
GTE2123E-60W-WW30			3000K	5510				
GTE2123E-60W-NW40			4000K	5910				
GTE2123E-60W-PW50			5000K	5910				
GTE2123E-60W-CW57			5700K	5910				
GTE2123E-100W-WW27	100W	192x1.5W SMD3030	2700K	8860	＞0.9			
GTE2123E-100W-WW30			3000K	9180				
GTE2123E-100W-NW100			4000K	9850				
GTE2123E-100W-PW50			5000K	9850				
GTE2123E-100W-CW57			5700K	9850				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

INTRODUCTION

LED POST TOP LIGHT

FEATURES
- Modern Post Top Area Lighting
- Simple Elgance Uniform Structure
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: CREE
- Driver Brand: INVENTRONICS
- Housing: Die-casted Aluminum
- Heat Sink: Die-casted Aluminum Module
- Optics: High Efficieny PC Lens
- Diffuser: Clear Tempered Glass Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ76mm Post
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [Post]: Height 2.5M/3.5M/4.5M/6M
- [CSC]: Photocell Sensor
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]

(E)

(D)

FRONVIEW

INNERVIEW

CASE STUDY:

DIMENSION: 【UNIT: MM】

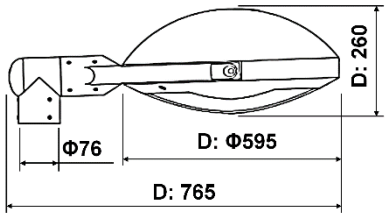



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2124D-35W-WW30	35W	25x5W CREE XTE	3000K	2820	＞0.9	BLP:(P15°): T2M: V70xH150° BLV: 90x150° BLR: T5L: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2124D-35W-NW40			4000K	2980				
GTE2124D-35W-CW57			5700K	3150				
GTE2124D-55W-WW30	55W	25x5W CREE XTE	3000K	4300	＞0.9			
GTE2124D-55W-NW40			4000K	4560				
GTE2124D-55W-CW57			5700K	4780				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT& BARN LIGHT



PHOTOMETRIC SENSOR

POLE MOUNTING

INTRODUCTION

FEATURES

Advanced LED Retrofit Technology
Upgarde Classic Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: EPISTAR
Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency Lens
Diffuser: Anti-UV Frosted PC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting Post: 1-1/2" or 1-5/8"
Suitable for Park, Barn, Garden……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
[CSC]: Photocell Sensor
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

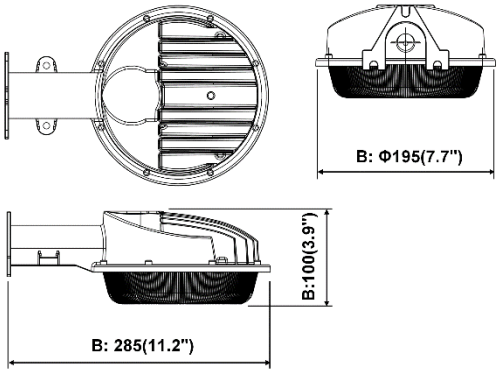

CASE STUDY

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2125B-35W-WW30	35W	132x0.5W SMD2835	3000K	3890	＞0.9	BLR: T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2125B-35W-NW40			4000K	4220				
GTE2125B-35W-CW57			5700K	4220				
GTE2125B-50W-WW30	50W	132x0.5W SMD2835	3000K	5510	＞0.9			
GTE2125B-50W-NW40			4000K	5970				
GTE2125B-50W-CW57			5700K	5970				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES
- Modern Post Top Area Lighting
- Upgrade LED Lighting Design
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: CITIZEN & PHILIPS
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Optics: High Efficiency PC Reflector
- Diffuser: Clear Glass Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- [Post]: Height 1M/1.2M/3.5M/4.5M/6M
- [CSC]: Photocell Sensor
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]

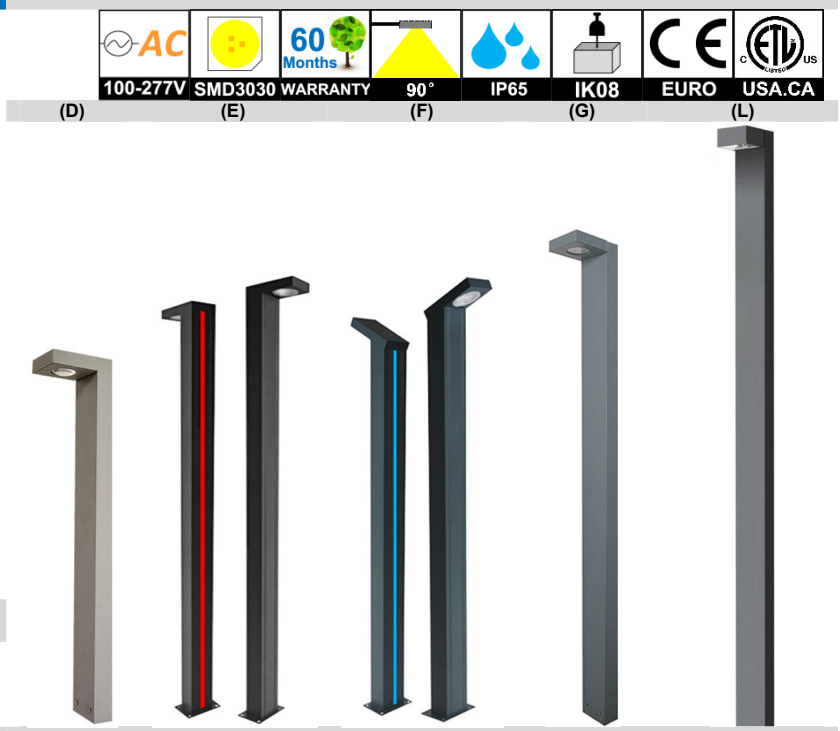

CASE STUDY:

DIMENSION: 【UNIT: MM】

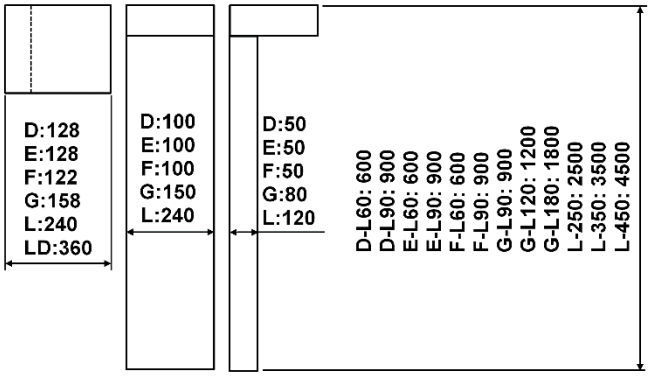

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2126D-10W-WW30	10W	1204C4 CITIZEN COB	3000K	930	＞0.9	BLR: T5M: 90°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC36V]
GTE2126D-10W-NW40			4000K	950				
GTE2126D-10W-CW57			5700K	970				
GTE2126E-10W-WW30	10W	1204C4 CITIZEN COB	3000K	930	＞0.9	BLR: T5M: 90°		
GTE2126E-10W-NW40			4000K	950				
GTE2126E-10W-CW57			5700K	970				
GTE2126F-10W-WW30	10W	1204C4 CITIZEN COB	3000K	930	＞0.9	BLR: T5M: 90°		
GTE2126F-10W-NW40			4000K	950				
GTE2126F-10W-CW57			5700K	970				
GTE2126G-15W-WW30	15W	1204C4 CITIZEN COB	3000K	1300	＞0.9	BLR: T5M: 90°		
GTE2126G-15W-NW40			4000K	1360				
GTE2126G-15W-CW57			5700K	1400				
GTE2126L-40W-WW22	40W	14x5W SMD5050	2200K	3820	＞0.9	BLR: T5M: 90°		
GTE2126L-40W-WW27			2700K	4000				
GTE2126L-40W-WW30			3000K	4130				
GTE2126L-40W-NW35			3500K	4250				
GTE2126L-40W-NW40			4000K	4380				
GTE2126L-40W-PW50			5000K	4380				
GTE2126L-40W-CW57			5700K	4380				
GTE2126L-40W-CW57			5700K	4380				
GTE2126LD-80W-WW22	80W	2x14x5W SMD5050	2200K	2x3820	＞0.9	BLP:(P15°): T2M: V70xH150°		
GTE2126LD-80W-WW27			2700K	2x4000				
GTE2126LD-80W-WW30			3000K	2x4130				
GTE2126LD-80W-NW35			3500K	2x4250				
GTE2126LD-80W-NW40			4000K	2x4380				
GTE2126LD-80W-PW50			5000K	2x4380				
GTE2126LD-80W-CW57			5700K	2x4380				
GTE2126LD-80W-CW57			5700K	2x4380				

LED POST TOP LIGHT



INTRODUCTION

FEATURES

Modern Post Top Area Lighting
Upgrade LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: CITIZEN & PHILIPS
Driver Brand: GUBO
Housing: Die-casted Aluminum
Optics: High Efficiency PC Reflector
Diffuser: Clear Glass Diffuser

INSTALLATION

Installation: Post-Top Mount
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
[Post]: Height 1M/1.2M/3.5M/4.5M/6M
[CSC]: Photocell Sensor
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

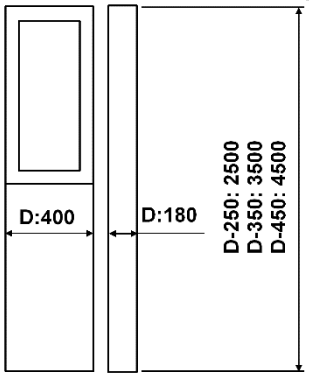

CASE STUDY

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2127D-40W-WW22	50W	64x1.5W SMD3030	2200K	5560	＞0.9	BLP:(P15°): T3M: V80xH150° BLR: T5V: 30° T5S: 60° T5M: 90° BLV: 90x120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2127D-40W-WW27			2700K	5780				
GTE2127D-40W-WW30			3000K	5950				
GTE2127D-40W-NW35			3500K	6150				
GTE2127D-40W-NW40			4000K	6440				
GTE2127D-40W-PW50			5000K	6440				
GTE2127D-40W-CW57			5700K	6440				
GTE2127D-40W-CW57			5700K	6440				
GTE2127D2-80W-WW22	50W	28x5W SMD5050	2200K	6750	＞0.9	BLP:(P15°): T3M: 80xH150° BLR: T5S: 60° T5M: 90° BLV: 90x120°		
GTE2127D2-80W-WW27			2700K	6980				
GTE2127D2-80W-WW30			3000K	7250				
GTE2127D2-80W-NW35			3500K	7340				
GTE2127D2-80W-NW40			4000K	7550				
GTE2127D2-80W-PW50			5000K	7550				
GTE2127D2-80W-CW57			5700K	7550				
GTE2127D2-80W-CW57			5700K	7500				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

INTRODUCTION

LED POST TOP LIGHT

FEATURES
- Modern Post Top Area Lighting
- Simple Elgance Uniform Structure
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Heat Sink: Die-casted Aluminum Module
- Optics: High Efficieny PC Lens
- Diffuser: Clear PC Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ170mm Post
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [Post]: Height 2.5M/3.5M/4.5M/6M
- [CSC]: Photocell Sensor
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]



COMBO	(C)	(B)	(A)

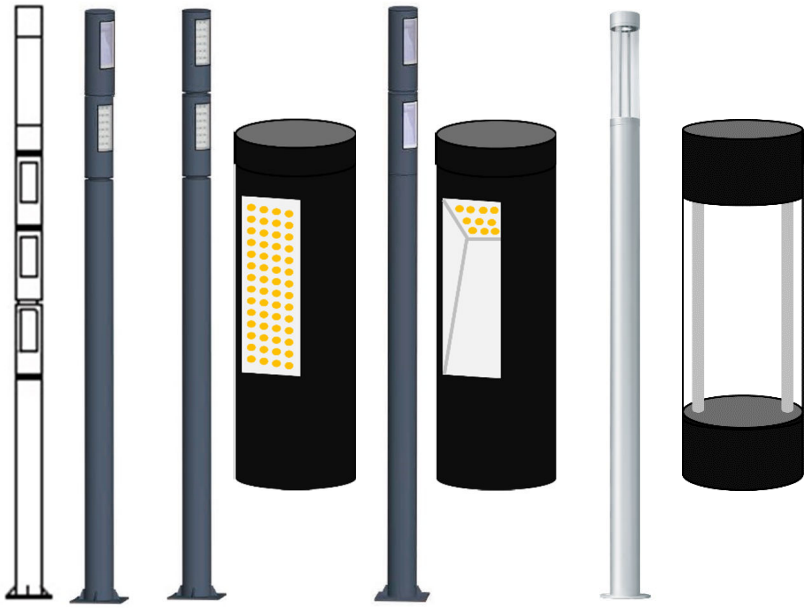

CASE STUDY:

DIMENSION: 【UNIT: MM】



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2128A-50W-WW30	50W	60x1.5W SMD3030	3000K	4020	＞0.9	BLR: T5: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2128A-50W-NW40			4000K	4480				
GTE2128A-50W-CW57			5700K	4480				
GTE2128B-30W-WW30	30W	15x5W SMD5050	3000K	3020	＞0.9	BLP:(P15°) T3M: V80xH150°		
GTE2128B-30W-NW40			4000K	3360				
GTE2128B-30W-CW57			5700K	3360				
GTE2128C-50W-WW30	50W	60x1.5W SMD3030	3000K	4520	＞0.9	BLP:(P15°): T3M: V80xH150°		
GTE2128C-50W-NW40			4000K	4980				
GTE2128C-50W-CW57			5700K	4980				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT



(A) (B) (S)

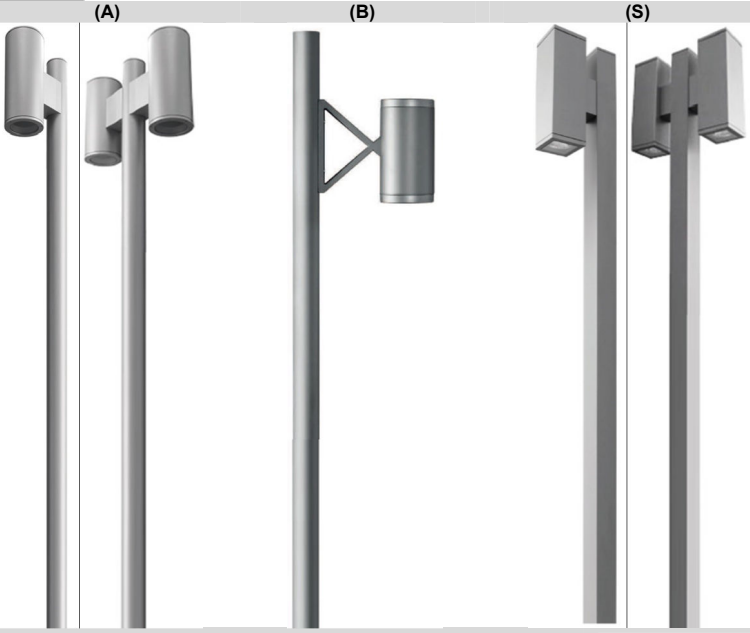

INTRODUCTION

FEATURES
- Advanced LED Retrofit Technology
- Upgarde Classic Post Top Area Lighting
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: CITIZEN
- Driver Brand: MEANWELL
- Housing: Die-casted Aluminum Housing
- Optics: High Efficiency PC Reflector
- Diffuser: Tempered Glass Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting Post: Φ150 Post
- Suitable for Park, Barn, Garden……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- [CSC]: Photocell Sensor
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

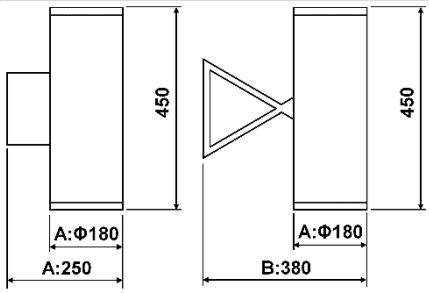



CASE STUDY

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2129A-50W-WW30	50W	1212C4 CITIZEN COB	3000K	4650	＞0.9	BRR: 15/24/38/45/60°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2129A-50W-NW40			4000K	4820				
GTE2129A-50W-CW57			5700K	4820				
GTE2129B-50W-WW30	50W	1212C4 CITIZEN COB	3000K	4650	＞0.9			
GTE2129B-50W-NW40			4000K	4820				
GTE2129B-50W-CW57			5700K	4820				
GTE2129S-50W-WW30	50W	1212C4 CITIZEN COB	3000K	4650	＞0.9			
GTE2129S-50W-NW40			4000K	4820				
GTE2129S-50W-CW57			5700K	4820				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES
- Modern Post Top Area Lighting
- Simple Elgance Uniform Structure
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Heat Sink: Die-casted Aluminum Module
- Optics: High Efficieny PC Lens
- Diffuser: Clear PC Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ170mm Post
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [Post]: Height 2.5M/3.5M/4.5M/6M
- [CSC]: Photocell Sensor
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]



SIDEVIEW (A)

TOPVIEW

(D)

(C) (B)

(E) CATENARY

CASE STUDY:

DIMENSION: 【UNIT: MM】

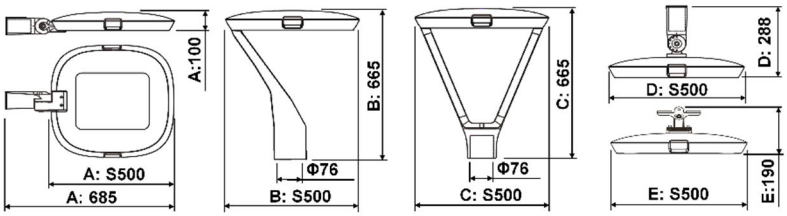

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2131A(B/C/D/E)-30W-WW30	30W	24x5W CREE XTE	3000K	3300	＞0.9	BLP:(P15°): T3M: V70xH140° BLR: T5: 120°	0/1-10V&TRIAC DMX512&DALI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2131A(B/C/D/E)-30W-NW40			4000K	3550				
GTE2131A(B/C/D/E)-30W-CW57			5700K	3750				
GTE2131A(B/C/D/E)-60W-WW30	60W	48x5W CREE XTE	3000K	6600	＞0.9			
GTE2131A(B/C/D/E)-60W-NW40			4000K	6900				
GTE2131A(B/C/D/E)-60W-CW57			5700K	7500				
GTE2131A(B/C/D/E)-100W-WW30	100W	64x5W CREE XTE	3000K	10500	＞0.9			
GTE2131A(B/C/D/E)-100W-NW40			4000K	11000				
GTE2131A(B/C/D/E)-100W-CW57			5700K	11550				
GTE2131A(B/C/D/E)2-30W-WW30	30W	72x1.5W SMD3030	3000K	3850	＞0.9	BLP:(P15°): T3M: V70xH140° BLR: T5: 120°	0/1-10V&TRIAC DMX512&DALI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2131A(B/C/D/E)2-30W-NW40			4000K	4050				
GTE2131A(B/C/D/E)2-30W-CW57			5700K	4050				
GTE2131A(B/C/D/E)2-60W-WW30	60W	144x1.5W SMD3030	3000K	7630	＞0.9			
GTE2131A(B/C/D/E)2-60W-NW40			4000K	8100				
GTE2131A(B/C/D/E)2-60W-CW57			5700K	8100				
GTE2131A(B/C/D/E)2-100W-WW30	100W	192x1.5W SMD3030	3000K	12200	＞0.9			
GTE2131A(B/C/D/E)2-100W-NW40			4000K	13000				
GTE2131A(B/C/D/E)2-100W-CW57			5700K	13000				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT



(D) (E)

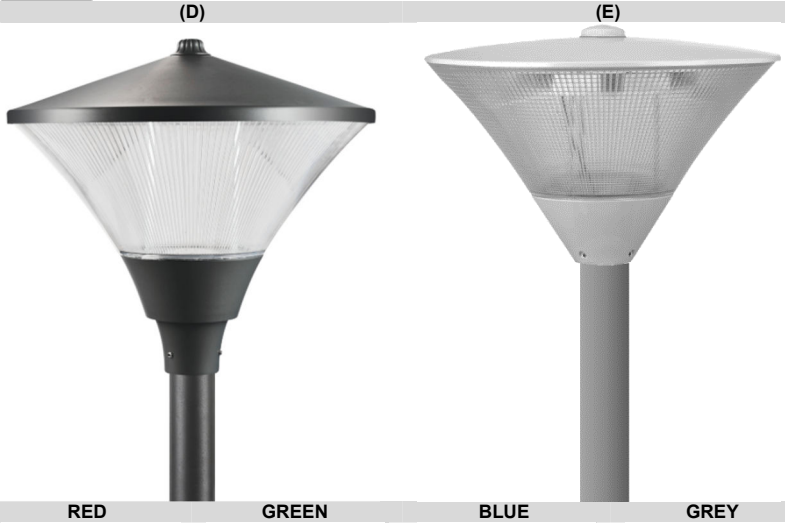

RED GREEN BLUE GREY

DIMENSION: 【UNIT: MM】

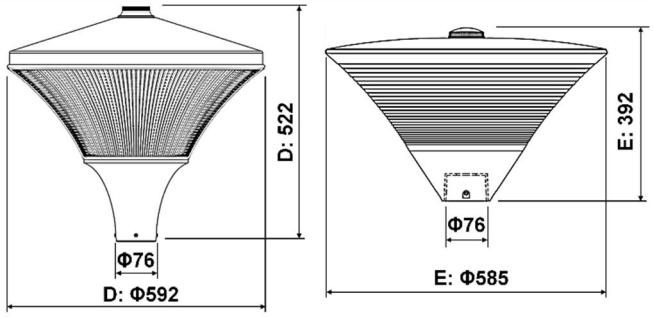

INTRODUCTION

FEATURES

Advanced LED Retrofit Technology
Upgarde Classic Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: CITIZEN
Driver Brand: INVENTRONICS
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Reflector
(D)Diffuser: Clear Striple PC Diffuser
(E)Diffuser: Clear Prismatic PC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting Post: Φ76 Post
Suitable for Park, Barn, Garden……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
[CSC]: Photocell Sensor

Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

CASE STUDY

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2132D-20W-WW30	20W	16x5W CREE XTE	3000K	1600	＞0.9	BRR: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2132D-20W-NW40			4000K	1650				
GTE2132D-20W-CW57			5700K	1720				
GTE2132D-30W-WW30	30W	16x5W CREE XTE	3000K	2200	＞0.9			
GTE2132D-30W-NW40			4000K	2360				
GTE2132D-30W-CW57			5700K	2420				
GTE2132E-30W-WW30	30W	96x1.5W SMD3030	3000K	3100	＞0.9			
GTE2132E-30W-NW40			4000K	3450				
GTE2132E-30W-CW57			5700K	3450				
GTE2132E-60W-WW30	60W	96x1.5W SMD3030	3000K	6000	＞0.9			
GTE2132E-60W-NW40			4000K	6420				
GTE2132E-60W-CW57			5700K	6420				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES

Advanced LED Retrofit Technology
Upgarde Classic Post Top Area Lighting
Easy Installation and Maintenance
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Module: Die-casted Aluminum
Driver Brand: MEANWELL
Housing: Galvanized Steel Plate
Optics: High Efficiency Lens

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ76mm Post Adaptor
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
Mounting: Φ3/4" Gas Thread
(DB/EB): Cage Frosted Glass Diffuser
[POST]: Height 3.5M/4.5M/6M/8M
[CSC]: Photocell Sensor
[E27]: E26/E27 Fitment Fixture
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

(D)

(E)

(F)

CAGE GLASS	(DW1)	(DW2)	(EW1)







MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2501D(F)-30W-WW30	30W	30x5W CREE XTE	3000K	1860	＞0.9	BLR: T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2501D(F)-30W-NW40			4000K	1950				
GTE2501D(F)-30W-CW57			5700K	2000				
GTE2501D(F)-45W-WW30	45W	30x5W CREE XTE	3000K	2850	＞0.9			
GTE2501D(F)-45W-NW40			4000K	2960				
GTE2501D(F)-45W-CW57			5700K	3050				
GTE2501D(F)-60W-WW30	60W	30x5W CREE XTE	3000K	3650	＞0.9			
GTE2501D(F)-60W-NW40			4000K	3750				
GTE2501D(F)-60W-CW57			5700K	3820				
GTE2501D(F)2-40W-WW30	40W	64x1.5W SMD3030	3000K	4520	＞0.9	BLP:(P15°): T3M: V80xH150° BLR: T5V: 30° T5S: 60° T5M: 90° BLV: 90x120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2501D(F)2-40W-NW40			4000K	4900				
GTE2501D(F)2-40W-CW57			5700K	4900				
GTE2501D(F)2-50W-WW30	50W	64x1.5W SMD3030	3000K	6330	＞0.9			
GTE2501D(F)2-50W-NW40			4000K	6860				
GTE2501D(F)2-50W-CW57			5700K	6860				
GTE2501D(F)2-80W-WW30	80W	2x64x1.5W SMD3030	3000K	9040	＞0.9			
GTE2501D(F)2-80W-NW40			4000K	9800				
GTE2501D(F)2-80W-CW57			5700K	9800				
GTE2501D(F)2-100W-WW30	100W	2x64x1.5W SMD3030	3000K	12050	＞0.9			
GTE2501D(F)2-100W-NW40			4000K	13060				
GTE2501D(F)2-100W-CW57			5700K	13060				
GTE2501E-50W-WW30	50W	64x1.5W SMD3030	3000K	6330	＞0.9	BLP:(P15°): T3M: V80xH150° BLR: T5V: 30° T5S: 60° T5M: 90° BLV: 90x120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2501E-50W-NW40			4000K	6860				
GTE2501E-50W-CW57			5700K	6860				
GTE2501E-100W-WW30	100W	2x64x1.5W SMD3030	3000K	12050	＞0.9			
GTE2501E-100W-NW40			4000K	13060				
GTE2501E-100W-CW57			5700K	13060				
GTE2501E-150W-WW30	150W	3x64x1.5W SMD3030	3000K	16270	＞0.9			
GTE2501E-150W-NW40			4000K	17640				
GTE2501E-150W-CW57			5700K	17640				

LED POST TOP LIGHT



CLEAR DIFFUSER (DW1) TOPVIEW

INTRODUCTION

FEATURES
- Advanced LED Retrofit Technology
- Upgarde Classic Post Top Area Lighting
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: CREE&PHILIPS
- Module: Die-casted Aluminum
- Driver Brand: MEANWELL
- Housing: Die-casted Aluminum
- Optics: High Efficiency Lens

INSTALLATION
- Installation: Post-Top Mount
- Mounting:Φ76mm Post Adaptor
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- (CB/DB): Cage Clear PC Diffuser
- [POST]: Height 3.5M/4.5M/6M/8M
- [CSC]: Photocell Sensor
- [E27]: E26/E27 Fitment Fixture
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

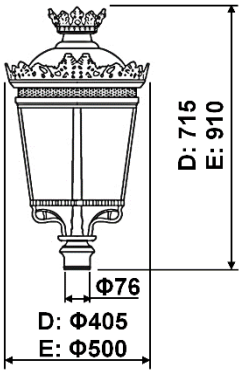

CASE STUDY

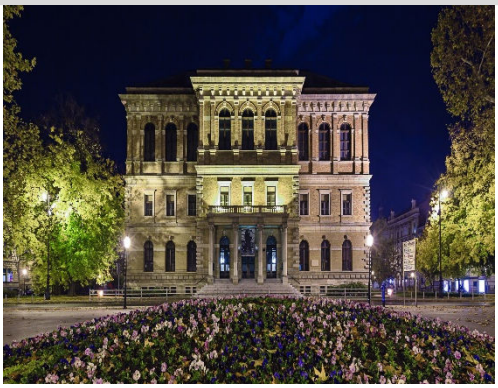

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2502D-30W-WW30	30W	24x5W CREE XTE	3000K	1860	＞0.9	BLR: T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2502D-30W-NW40			4000K	1950				
GTE2502D-30W-CW57			5700K	2000				
GTE2502D-45W-WW30	45W	24x5W CREE XTE	3000K	2850	＞0.9			
GTE2502D-45W-NW40			4000K	2960				
GTE2502D-45W-CW57			5700K	3050				
GTE2502D-60W-WW30	60W	24x5W CREE XTE	3000K	3650	＞0.9			
GTE2502D-60W-NW40			4000K	3750				
GTE2502D-60W-CW57			5700K	3820				
GTE2502E-30W-WW30	30W	24x5W CREE XTE	3000K	1860	＞0.9	BLR: T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2502E-30W-NW40			4000K	1950				
GTE2502E-30W-CW57			5700K	2000				
GTE2502E-45W-WW30	45W	24x5W CREE XTE	3000K	2850	＞0.9			
GTE2502E-45W-NW40			4000K	2960				
GTE2502E-45W-CW57			5700K	3050				
GTE2502E-60W-WW30	60W	24x5W CREE XTE	3000K	3650	＞0.9			
GTE2502E-60W-NW40			4000K	3750				
GTE2502E-60W-CW57			5700K	3820				
GTE2502E2-80W-WW30	80W	154x1.5W SMD3030	3000K	6450	＞0.9	BLR: T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2502E2-80W-NW40			4000K	6980				
GTE2502E2-80W-CW57			5700K	6980				
GTE2502E2-120W-WW30	120W	154x1.5W SMD3030	3000K	9680	＞0.9			
GTE2502E2-120W-NW40			4000K	10490				
GTE2502E2-120W-CW57			5700K	10490				
GTE2502E2-150W-WW30	150W	154x1.5W SMD3030	3000K	12010	＞0.9			
GTE2502E2-150W-NW40			4000K	13020				
GTE2502E2-150W-CW57			5700K	13020				

INTRODUCTION

LED POST TOP LIGHT

FEATURES
- Upgarde Classic Post Top Area Lighting
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: CREEE&PHILIPS
- Module: Die-casted Aluminum
- Driver Brand: MEANWELL
- Housing: Die-casted Aluminum
- Optics: High Efficiency PC Lens

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Post Φ20/Φ34/Φ40/Φ50mm
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- (DB/EB): Dome Clear PC Diffuser
- [POST]: Height 3.5M/4.5M/6M/8M
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

(F)

CASE STUDY:

DIMENSION: 【UNIT: MM】

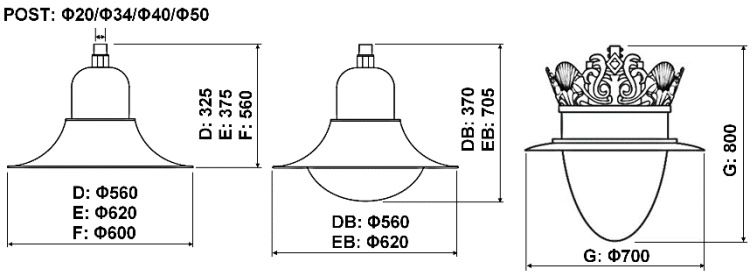

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2503D(E/G)-30W-WW30	30W	30x5W CREE XTE	3000K	2580	＞0.9	BLR: T5M: 90°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2503D(E/G)-30W-NW40			4000K	2650				
GTE2503D(E/G)-30W-CW57			5700K	2740				
GTE2503D(E/G)-45W-WW30	45W	30x5W CREE XTE	3000K	3980	＞0.9			
GTE2503D(E/G)-45W-NW40			4000K	4060				
GTE2503D(E/G)-45W-CW57			5700K	4190				
GTE2503D(E/G)-60W-WW30	60W	30x5W CREE XTE	3000K	4630	＞0.9			
GTE2503D(E/G)-60W-NW40			4000K	4750				
GTE2503D(E/G)-60W-CW57			5700K	4940				
GTE2503D(E/G)2-40W-WW30	40W	64x1.5W SMD3030	3000K	4520	＞0.9	BLP:(P15°): T3M: V80xH150° BLR: T5V: 30° T5S: 60° T5M: 90° BLV: 90x120°		
GTE2503D(E/G)2-40W-NW40			4000K	4900				
GTE2503D(E/G)2-40W-CW57			5700K	4900				
GTE2503D(E/G)2-50W-WW30	50W	64x1.5W SMD3030	3000K	5650	＞0.9			
GTE2503D(E/G)2-50W-NW40			4000K	6150				
GTE2503D(E/G)2-50W-CW57			5700K	6150				
GTE2503D(E/G)2-50W-WW30	60W	64x1.5W SMD3030	3000K	6240	＞0.9			
GTE2503D(E/G)2-50W-NW40			4000K	6780				
GTE2503D(E/G)2-50W-CW57			5700K	6780				
GTE2503E(G)2-100W-WW30	100W	2x64x1.5W SMD3030	3000K	12050	＞0.9			
GTE2503E(G)2-100W-NW40			4000K	13060				
GTE2503E(G)2-100W-CW57			5700K	13060				
GTE2503F-60W-WW30	60W	64x1.5W SMD3030	3000K	6240	＞0.9	BLP:(P15°): T3M: V80xH150° BLR: T5V: 30° T5S: 60° T5M: 90° BLV: 90x120°		
GTE2503F-60W-NW40			4000K	6780				
GTE2503F-60W-CW57			5700K	6780				
GTE2503F-100W-WW30	100W	2x64x1.5W SMD3030	3000K	12050	＞0.9			
GTE2503F-100W-NW40			4000K	13060				
GTE2503F-100W-CW57			5700K	13060				
GTE2503F-150W-WW30	150W	3x64x1.5W SMD3030	3000K	16270	＞0.9			
GTE2503F-150W-NW40			4000K	17640				
GTE2503F-150W-CW57			5700K	17640				

LED POST TOP LIGHT



INTRODUCTION

FEATURES
- Advanced LED Retrofit Technology
- Upgarde Classic Post Top Area Lighting
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Module: Die-casted Aluminum
- Driver Brand: MEANWELL
- Housing: Die-casted Aluminum
- Optics: High Efficiency Lens

INSTALLATION
- Installation: Post-Top Mount
- Mounting:Φ76mm Post Adaptor
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- (CB/DB): Cage Clear PC Diffuser
- [POST]: Height 2.5M/3.5M/4.5M
- [CSC]: Photocell Sensor
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】



CASE STUDY

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2505D-40W-WW30	40W	64x1.5W SMD3030	3000K	4520	＞0.9	BLP:(P15°): T3M: V80xH150° BLR: T5V: 30° T5S: 60° T5M: 90° BLV: 90x120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2505D-40W-NW40			4000K	4900				
GTE2505D-40W-CW57			5700K	4900				
GTE2505D-50W-WW30	50W	64x1.5W SMD3030	3000K	5650	＞0.9			
GTE2505D-50W-NW40			4000K	6150				
GTE2505D-50W-CW57			5700K	6150				
GTE2505D-80W-WW30	80W	2x64x1.5W SMD3030	3000K	9040	＞0.9			
GTE2505D-80W-NW40			4000K	9800				
GTE2505D-80W-CW57			5700K	9800				
GTE2505D-100W-WW30	100W	2x64x1.5W SMD3030	3000K	12050	＞0.9			
GTE2505D-100W-NW40			4000K	13060				
GTE2505D-100W-CW57			5700K	13060				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES

Advanced LED Retrofit Technology
Upgarde Classic Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Module: Die-casted Aluminum
Driver Brand: MEANWELL
Housing: Die-casted Aluminum
(D/E)Optics: High Efficiency PC Lens
(F) Diffuser: Frosted PC Dome Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ76mm Post Adaptor
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[POST]: Height 2.5M/3.5M/4.5M
[CSC]: Photocell Sensor
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

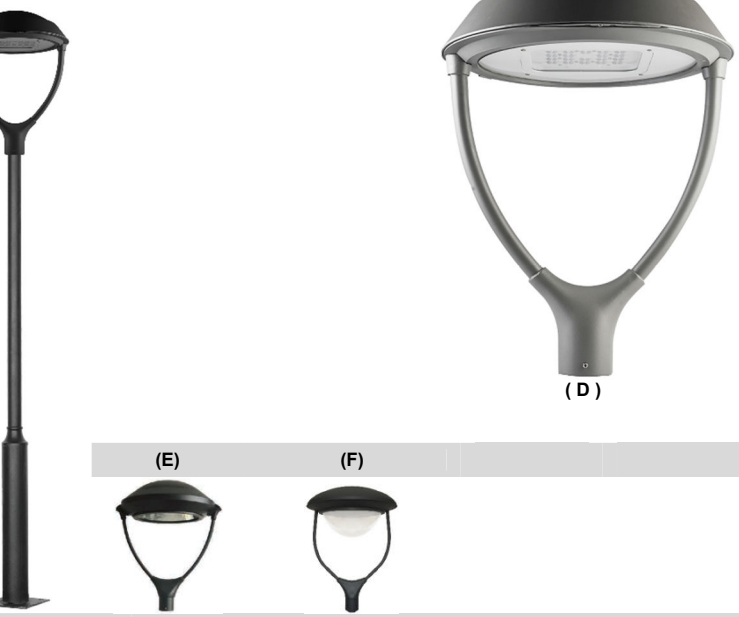

CASE STUDY:

DIMENSION: 【UNIT: MM】

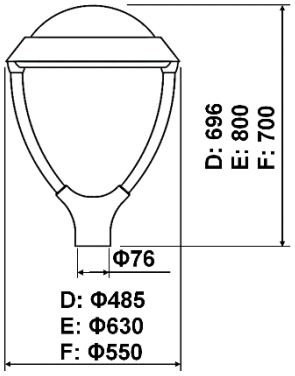

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2506D-35W-WW30	35W	25x5W CREE XTE	3000K	2820	＞0.9	BLP:(P15°): T2M: V70xH150° BLV: 90x150° BLR: T5L: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2506D-35W-NW40			4000K	2980				
GTE2506D-35W-CW57			5700K	3150				
GTE2506D-55W-WW30	55W	25x5W CREE XTE	3000K	4300	＞0.9			
GTE2506D-55W-NW40			4000K	4560				
GTE2506D-55W-CW57			5700K	4780				
GTE2506E-40W-WW30	40W	64x1.5W SMD3030	3000K	4520	＞0.9	BLP:(P15°): T3M: V80xH150° BLR: T5V: 30° T5S: 60° T5M: 90° BLV: 90x120°		
GTE2506E-40W-NW40			4000K	4900				
GTE2506E-40W-CW57			5700K	4900				
GTE2506E-50W-WW30	50W	64x1.5W SMD3030	3000K	5650	＞0.9			
GTE2506E-50W-NW40			4000K	6150				
GTE2506E-50W-CW57			5700K	6150				
GTE2506E-80W-WW30	80W	2x64x1.5W SMD3030	3000K	9040	＞0.9			
GTE2506E-80W-NW40			4000K	9800				
GTE2506E-80W-CW57			5700K	9800				
GTE2506E-100W-WW30	100W	2x64x1.5W SMD3030	3000K	12050	＞0.9			
GTE2506E-100W-NW40			4000K	13060				
GTE2506E-100W-CW57			5700K	13060				
GTF2506F-50W-WW30	50W	64x1.5W SMD3030	3000K	4800	＞0.9	BLR: T5L: 150°		
GTF2506F-50W-NW40			4000K	5230				
GTF2506F-50W-CW57			5700K	5230				
GTF2506F-100W-WW30	100W	2x64x1.5W SMD3030	3000K	10240	＞0.9			
GTF2506F-100W-NW40			4000K	11100				
GTF2506F-100W-CW57			5700K	11100				

LED POST TOP LIGHT



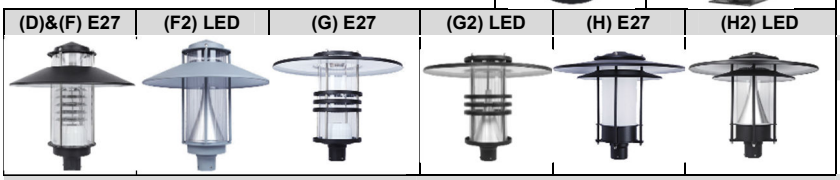

INTRODUCTION

FEATURES
- Advanced LED Retrofit Technology
- Upgarde Classic Post Top Area Lighting
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Module: Die-casted Aluminum
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Diffuser: Anti-UV Clear PC Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting:Φ76mm Post Adaptor
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [POST]: Height 1.0M/1.5M/2.5M/3.5M/4.5M
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

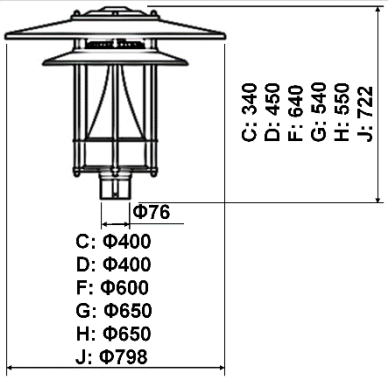

CASE STUDY: (C-1.2M POST)

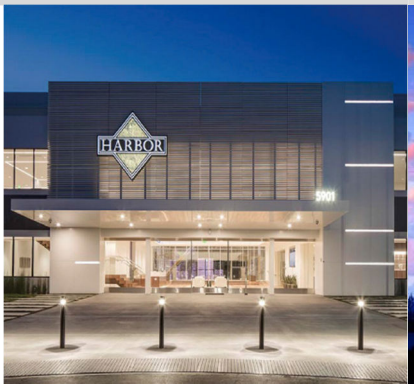

CASE STUDY: (H-3.5M POST)

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2507C-25W-WW30	25W	LED CORN E26/E27	3000K	1930	＞0.9	BLR: T5L: 150°	TRIAC	AC100~277V 50/60Hz [DC24V]
GTE2507C-25W-NW40			4000K	1980				
GTE2507C-25W-CW57			5700K	2020				
GTE2507D(F/G/H)-40W-WW30	40W	LED CORN E26/E27	3000K	3150	＞0.9			
GTE2507D(F/G/H)-40W-NW40			4000K	3250				
GTE2507D(F/G/H)-40W-CW57			5700K	3320				
GTE2507F(G/H)2-35W-WW27	35W	48x1.5W SMD3030	2700K	2710	＞0.9	BLR: T5L: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2507F(G/H)2-35W-WW30			3000K	2780				
GTE2507F(G/H)2-35W-NW40			4000K	2840				
GTE2507F(G/H)2-35W-PW50			5000K	2840				
GTE2507F(G/H)2-35W-CW57			5700K	2840				
GTE2507J-30W-WW30	30W	132x1.5W SMD3030	3000K	2700	＞0.9	BLR: T5L: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2507J-30W-NW40			4000K	2850				
GTE2507J-30W-CW57			5700K	2850				
GTE2507J-60W-WW30	60W	132x1.5W SMD3030	3000K	5400	＞0.9			
GTE2507J-60W-NW40			4000K	5900				
GTE2507J-60W-CW57			5700K	5900				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES

Advanced LED Retrofit Technology
Upgarde Classic Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Module: Die-casted Aluminum
Driver Brand: INVENTRONICS
Housing: Die-casted Aluminum
Optics: Opal PC Diffuser
Diffuser: Anti-UV Clear PC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ76mm Post Adaptor
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[POST]: Height 2.5M/3.5M/4.5M

Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]



(D2) LED (D) E27

BLUE GREEN GREY RED

CASE STUDY:

DIMENSION: 【UNIT: MM】

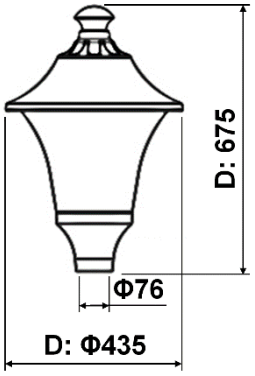

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2508D-25W-WW30	25W	LED CORN E26/E27	3000K	1930	＞0.9	BLR: T5L: 120°	NON	AC100~277V 50/60Hz [DC24V]
GTE2508D-25W-NW40			4000K	1980				
GTE2508D-25W-CW57			5700K	2020				
GTE2508D-40W-WW30	40W	LED CORN E26/E27	3000K	3150	＞0.9			
GTE2508D-40W-NW40			4000K	3250				
GTE2508D-40W-CW57			5700K	3320				
GTE2508D2-35W-WW27	35W	48x1.5W SMD3030	2700K	2710	＞0.9	BLR: T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2508D2-35W-WW30			3000K	2780				
GTE2508D2-35W-NW40			4000K	2840				
GTE2508D2-55W-PW50			5000K	2840				
GTE2508D2-55W-CW57			5700K	2840				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT



(D) E27

(EB) LED

INTRODUCTION

FEATURES
- Advanced LED Retrofit Technology
- Upgarde Classic Post Top Area Lighting
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Module: Die-casted Aluminum
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- (D/E)Diffuser: Anti-UV Opal PC Diffuser
- (DB/EB)Diffuser: Anti-UV Clear PC Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting:Φ76mm Post Adaptor
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [POST]: Height 2.5M/3.5M/4.5M
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

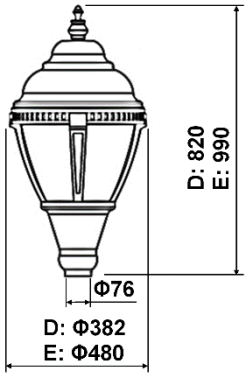

CASE STUDY:

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2508D-30W-WW30	30W	LED CORN E26/E27	3000K	2480	＞0.9	BLR: T5L: 120°	NON	AC100~277V 50/60Hz [DC24V]
GTE2508D-30W-NW40			4000K	2520				
GTE2508D-30W-CW57			5700K	2520				
GTE2508D-40W-WW30	40W	LED CORN E26/E27	3000K	3300	＞0.9			
GTE2508D-40W-NW40			4000K	3600				
GTE2508D-40W-CW57			5700K	3600				
GTE2508D-50W-WW30	50W	LED CORN E26/E27	3000K	4120	＞0.9			
GTE2508D-50W-NW40			4000K	4500				
GTE2508D-50W-CW57			5700K	4500				
GTE2508E-50W-WW30	50W	LED CORN E26/E27	3000K	4120	＞0.9			
GTE2508E-50W-NW40			4000K	4500				
GTE2508E-50W-CW57			5700K	4500				
GTE2508DB-35W-WW27	35W	48x1.5W SMD3030	2700K	3150	＞0.9	BLR: T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2508DB-35W-WW30			3000K	3220				
GTE2508DB-35W-NW40			4000K	3450				
GTE2508DB-55W-PW50			5000K	3450				
GTE2508DB-55W-CW57			5700K	3450				
GTE2508EB-60W-WW30	60W	30x5W CREE XTE	3000K	4630	＞0.9			
GTE2508EB-60W-NW40			4000K	4750				
GTE2508EB-60W-CW57			5700K	4940				
GTE2508E3-80W-WW30	80W	2x64x1.5W SMD3030	3000K	7040	＞0.9			
GTE2508E3-80W-NW40			4000K	8100				
GTE2508E3-80W-CW57			5700K	8100				
GTE2508E3-100W-WW30	100W	2x64x1.5W SMD3030	3000K	9050	＞0.9			
GTE2508E3-100W-NW40			4000K	10060				
GTE2508E3-100W-CW57			5700K	10060				

INTRODUCTION

LED POST TOP LIGHT



FEATURES

Advanced LED Retrofit Technology
Upgarde Classic Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Module: Die-casted Aluminum
Driver Brand: GUBO
Housing: Die-casted Aluminum
Diffuser: Anti-UV Clear PC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ76mm Post Adaptor
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[POST]: Height 2.5M/3.5M/4.5M
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

(D)

WHITE	GREY	RED	GREEN	BLUE

CASE STUDY:

DIMENSION: 【UNIT: MM】



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2510D-25W-WW30	25W	LED CORN E26/E27	3000K	1930	＞0.9	BLR: T5L: 150°	NON	AC100~277V 50/60Hz [DC24V]
GTE2510D-25W-NW40			4000K	1980				
GTE2510D-25W-CW57			5700K	2020				
GTE2510D-40W-WW30	40W	LED CORN E26/E27	3000K	3150	＞0.9			
GTE2510D-40W-NW40			4000K	3250				
GTE2510D-40W-CW57			5700K	3320				
GTE2510D2-35W-WW27	35W	48x1.5W SMD3030	2700K	2710	＞0.9	BLR: T5L: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2510D2-35W-WW30			3000K	2780				
GTE2510D2-35W-NW40			4000K	2840				
GTE2510D2-35W-PW50			5000K	2840				
GTE2510D2-35W-CW57			5700K	2840				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT



(D) E27

(D2) LED

INTRODUCTION

FEATURES
- Advanced LED Retrofit Technology
- Upgarde Classic Post Top Area Lighting
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- Module: Die-casted Aluminum
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Diffuser: Anti-UV Clear PC Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting:Φ76mm Post Adaptor
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- [POST]: Height 2.5M/3.5M/4.5M
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

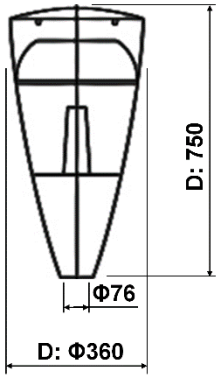

CASE STUDY:

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2511D-25W-WW30	25W	LED CORN E26/E27	3000K	1930	＞0.9	BLR: T5L: 150°	NON	AC100~277V 50/60Hz [DC24V]
GTE2511D-25W-NW40			4000K	1980				
GTE2511D-25W-CW57			5700K	2020				
GTE2511D-40W-WW30	40W	LED CORN E26/E27	3000K	3150	＞0.9			
GTE2511D-40W-NW40			4000K	3250				
GTE2511D-40W-CW57			5700K	3320				
GTE2511D2-35W-WW27	35W	48x1.5W SMD3030	2700K	2710	＞0.9	BLR: T5L: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2511D2-35W-WW30			3000K	2780				
GTE2511D2-35W-NW40			4000K	2840				
GTE2511D2-35W-PW50			5000K	2840				
GTE2511D2-35W-CW57			5700K	2840				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES

Advanced LED Retrofit Technology
Upgarde Classic Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Module: Die-casted Aluminum
Driver Brand: GUBO
Housing: Die-casted Aluminum
Diffuser: Tempered Clear Glass Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ76mm Post Adaptor
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[CSP]: PIR Motion Sensor
[POST]: Height 2.5M/3.5M/4.5M
Housing Color Finish: Customizable



(D)

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

CASE STUDY:

DIMENSION: 【UNIT: MM】

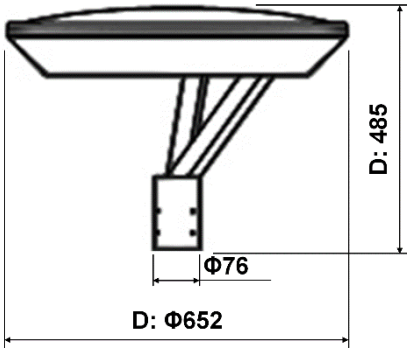

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2512D-35W-WW30	35W	30x5W CREE XTE	3000K	3410	＞0.9	BLP:(P15°): T2M: V70xH150° BLR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2512D-35W-NW40			4000K	3520				
GTE2512D-35W-CW57			5700K	3630				
GTE2512D-45W-WW30	45W	30x5W CREE XTE	3000K	4340	＞0.9			
GTE2512D-45W-NW40			4000K	4400				
GTE2512D-45W-CW57			5700K	4670				
GTE2512D-60W-WW30	60W	30x5W CREE XTE	3000K	5280	＞0.9			
GTE2512D-60W-NW40			4000K	5450				
GTE2512D-60W-CW57			5700K	5670				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

LED POST TOP LIGHT



INTRODUCTION

FEATURES

Advanced LED Retrofit Technology
Upgarde Classic Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Module: Die-casted Aluminum
Driver Brand: GUBO
Housing: Die-casted Aluminum
Diffuser: Anti-UV Frosted PC Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ76mm Post Adaptor
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[CSP]: PIR Motion Sensor
[POST]: Height 1.1M/2M/3.5M/4M
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

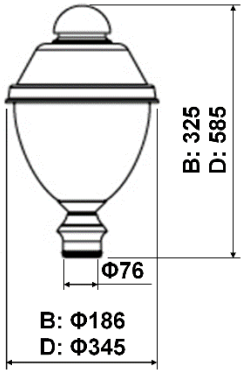

CASE STUDY:

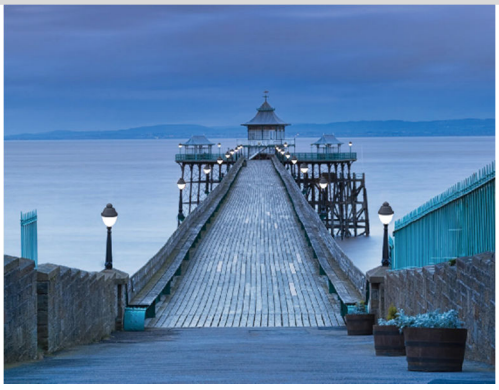

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2513B-10W-WW30	10W	LED CORN E26/E27	3000K	860	＞0.9	BLR: T5L: 120°	NON	AC100~277V 50/60Hz [DC24V]
GTE2513B-10W-NW40			4000K	880				
GTE2513B-10W-CW57			5700K	900				
GTE2513B-15W-WW30	15W	LED CORN E26/E27	3000K	1280	＞0.9			
GTE2513B-15W-NW40			4000K	1330				
GTE2513B-15W-CW57			5700K	1350				
GTE2513D-25W-WW30	25W	LED CORN E26/E27	3000K	2120	＞0.9			
GTE2513D-25W-NW40			4000K	2190				
GTE2513D-30W-CW57			5700K	2240				
GTE2513D-40W-WW30	40W	LED CORN E26/E27	3000K	3400	＞0.9			
GTE2513D-40W-NW40			4000K	3520				
GTE2513D-40W-CW57			5700K	3600				
GTE2513B2-10W-WW27	10W	48x0.5W SMD2835	2700K	780	＞0.9	BLR: T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2513B2-10W-WW30			3000K	800				
GTE2513B2-10W-NW40			4000K	830				
GTE2513B2-10W-PW50			5000K	830				
GTE2513B2-10W-CW57			5700K	830				
GTE2513D2-35W-WW27	35W	48x1.5W SMD3030	2700K	2710	＞0.9			
GTE2513D2-35W-WW30			3000K	2780				
GTE2513D2-35W-NW40			4000K	2840				
GTE2513D2-35W-PW50			5000K	2840				
GTE2513D2-35W-CW57			5700K	2840				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES

Advanced LED Retrofit Technology
Upgarde Classic Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: PHILIPS
Module: Die-casted Aluminum
Driver Brand: GUBO
Housing: Die-casted Aluminum
Diffuser: Frosted Tempered Glass Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting:Φ76mm Post Adaptor
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
[CSP]: PIR Motion Sensor
[POST]: Height 1.1M/2M/3.5M/4M
Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

100-277V | SMD3030 | 60 Months WARRANTY | 120° | IP65 | IK06 | EURO | USA.CA

(B-L42) (B-L213) (BD-L218) (D-L350) (B-L115)

(BW1) (BW2) (BP)PENDANT (DW2)

CASE STUDY: WALL MOUNTED

CASE STUDY: POST

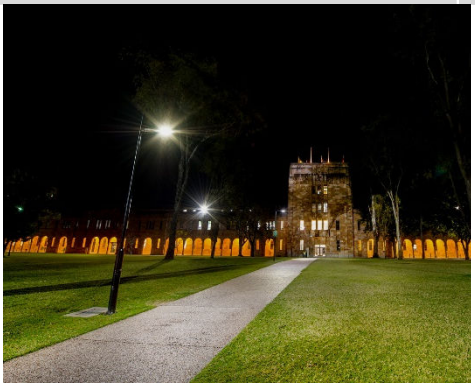

DIMENSION: 【UNIT: MM】

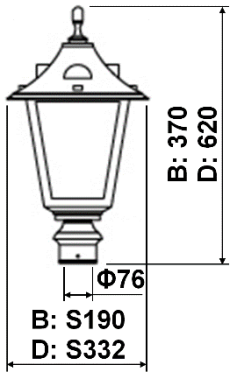

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2515B-10W-WW30	10W	LED CORN E26/E27	3000K	860	＞0.9	BLR: T5L: 120°	NON	AC100~277V 50/60Hz [DC24V]
GTE2515B-10W-NW40			4000K	880				
GTE2515B-10W-CW57			5700K	900				
GTE2515B-15W-WW30	15W	LED CORN E26/E27	3000K	1280	＞0.9			
GTE2515B-15W-NW40			4000K	1330				
GTE2515B-15W-CW57			5700K	1350				
GTE2515D-25W-WW30	25W	LED CORN E26/E27	3000K	2120	＞0.9			
GTE2515D-25W-NW40			4000K	2190				
GTE2515D-30W-CW57			5700K	2240				
GTE2515D-40W-WW30	40W	LED CORN E26/E27	3000K	3400	＞0.9			
GTE2515D-40W-NW40			4000K	3520				
GTE2515D-40W-CW57			5700K	3600				
GTE2515D2-35W-WW27	35W	48x1.5W SMD3030	2700K	2710	＞0.9	BLR: T5L: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTE2515D2-35W-WW30			3000K	2780				
GTE2515D2-35W-NW40			4000K	2840				
GTE2515D2-35W-PW50			5000K	2840				
GTE2515D2-35W-CW57			5700K	2840				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

POST TOP LIGHT



(C/D)

(CC/DC)

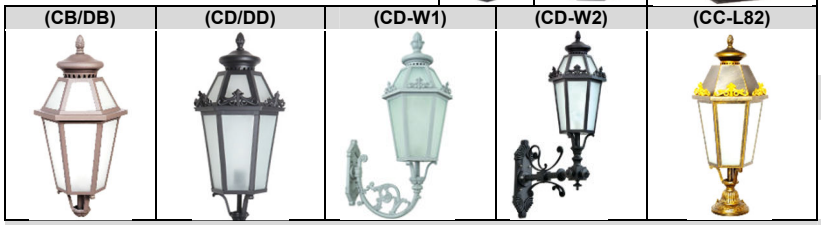

DIMENSION: 【UNIT: MM】

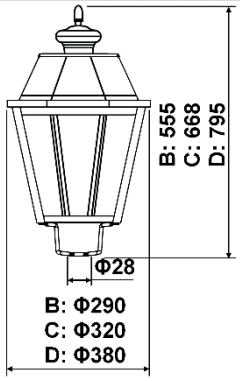

INTRODUCTION

FEATURES
- Advanced LED Retrofit Technology
- Upgarde Classic Post Top Area Lighting
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: E27/E26 Bulb
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Diffuser: Frosted Tempered Glass Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ3/4" Gas Thread
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- Mounting:Φ76mm Post Adaptor
- [POST]: Height 3.5M/4.5M/6M/8M
- [E27]: E26/E27 Fitment Fixture

Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

CASE STUDY:

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2516B-25W-WW30	25W	LED CORN E26/E27	3000K	2120	＞0.9	BLR: T5L: 120°	NON	AC100~277V 50/60Hz [DC24V]
GTE2516B-25W-NW40			4000K	2190				
GTE2516B-30W-CW57			5700K	2240				
GTE2516B-40W-WW30	40W	LED CORN E26/E27	3000K	3400	＞0.9			
GTE2516B-40W-NW40			4000K	3520				
GTE2516B-40W-CW57			5700K	3600				
GTE2516C-25W-WW30	25W	LED CORN E26/E27	3000K	2120	＞0.9			
GTE2516C-25W-NW40			4000K	2190				
GTE2516C-30W-CW57			5700K	2240				
GTE2516C-40W-WW30	40W	LED CORN E26/E27	3000K	3400	＞0.9			
GTE2516C-40W-NW40			4000K	3520				
GTE2516C-40W-CW57			5700K	3600				
GTE2516D-40W-WW30	40W	LED CORN E26/E27	3000K	3400	＞0.9			
GTE2516D-40W-NW40			4000K	3520				
GTE2516D-40W-CW57			5700K	3600				
GTE2516D-50W-WW30	50W	LED CORN E26/E27	3000K	4250	＞0.9			
GTE2516D-50W-NW40			4000K	4400				
GTE2516D-50W-CW57			5700K	4500				
GTE2516D-80W-WW30	80W	LED CORN E26/E27	3000K	6460	＞0.9			
GTE2516D-80W-NW40			4000K	6650				
GTE2516D-80W-CW57			5700K	6820				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

INTRODUCTION

LED POST TOP LIGHT

FEATURES

Advanced LED Retrofit Technology
Upgarde Classic Post Top Area Lighting
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index ＞80
Long Lifespan ＞50,000hours
Working Temperature: -30℃~50℃

MATERIALS & FINISH

LED Brand: E27/E26 Bulb
Driver Brand: GUBO
Housing: Die-casted Aluminum
Diffuser: Frosted Tempered Glass Diffuser

INSTALLATION

Installation: Post-Top Mount
Mounting: Φ3/4" Gas Thread
Suitable for Road Light, like Street, Park……

STANDARD

Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class Ⅰ Electric

OPTION

LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS,PHILIPS
Mounting:Φ76mm Post Adaptor
[POST]: Height 3.5M/4.5M/6M/8M
[E27]: E26/E27 Fitment Fixture

Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]



(AD/BD/CD/DD) (AC/BC/CC/DC) (AB/BB/CB/DB) (A/B/C/D)

(CC)	(CD)	(CD)	(DD-W1)

CASE STUDY:

DIMENSION: 【UNIT: MM】

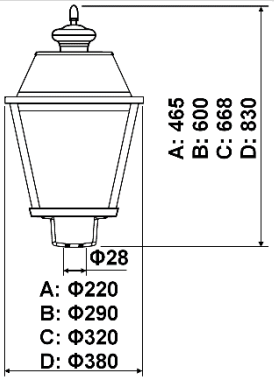

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT 【V】
GTE2517A-10W-WW30	10W	LED CORN E26/E27	3000K	860	＞0.9	BLR: T5L: 120°	NON	AC100~277V 50/60Hz [DC24V]
GTE2517A-10W-NW40			4000K	880				
GTE2517A-10W-CW57			5700K	900				
GTE2517A-15W-WW30	15W	LED CORN E26/E27	3000K	1280	＞0.9			
GTE2517A-15W-NW40			4000K	1330				
GTE2517A-15W-CW57			5700K	1350				
GTE2517B-25W-WW30	25W	LED CORN E26/E27	3000K	2120	＞0.9			
GTE2517B-25W-NW40			4000K	2190				
GTE2517B-30W-CW57			5700K	2240				
GTE2517B-40W-WW30	40W	LED CORN E26/E27	3000K	3400	＞0.9			
GTE2517B-40W-NW40			4000K	3520				
GTE2517B-40W-CW57			5700K	3600				
GTE2517C-25W-WW30	25W	LED CORN E26/E27	3000K	2120	＞0.9			
GTE2517C-25W-NW40			4000K	2190				
GTE2517C-30W-CW57			5700K	2240				
GTE2517C-40W-WW30	40W	LED CORN E26/E27	3000K	3400	＞0.9			
GTE2517C-40W-NW40			4000K	3520				
GTE2517C-40W-CW57			5700K	3600				
GTE2517D-40W-WW30	40W	LED CORN E26/E27	3000K	3400	＞0.9			
GTE2517D-40W-NW40			4000K	3520				
GTE2517D-40W-CW57			5700K	3600				
GTE2517D-50W-WW30	50W	LED CORN E26/E27	3000K	4250	＞0.9			
GTE2517D-50W-NW40			4000K	4400				
GTE2517D-50W-CW57			5700K	4500				
GTE2517D-80W-WW30	80W	LED CORN E26/E27	3000K	6460	＞0.9			
GTE2517D-80W-NW40			4000K	6650				
GTE2517D-80W-CW57			5700K	6820				

POST TOP LIGHT



INTRODUCTION

FEATURES
- Advanced LED Retrofit Technology
- Upgarde Classic Post Top Area Lighting
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: E27/E26 Bulb
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Diffuser: Frosted Tempered Glass Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting:Φ76mm Post Adaptor
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP54 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- [DTR] Diffuser: Transparent Reeded Glass
- [POST]: Height 1.5M/2.5M/3.5M
- [E27]: E26/E27 Fitment Fixture
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

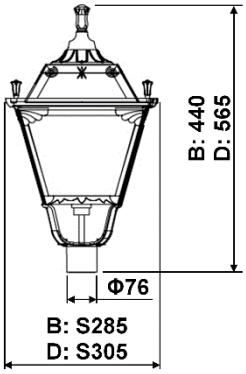

CASE STUDY:

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2518B-15W-WW30	15W	LED CORN E26/E27	3000K	1280	＞0.9	BLR: T5L: 120°	NON	AC100~277V 50/60Hz [DC24V]
GTE2518B-15W-NW40			4000K	1330				
GTE2518B-15W-CW57			5700K	1350				
GTE2518B-25W-WW30	25W	LED CORN E26/E27	3000K	2120	＞0.9			
GTE2518B-25W-NW40			4000K	2190				
GTE2518B-25W-CW57			5700K	2240				
GTE2518D-25W-WW30	25W	LED CORN E26/E27	3000K	2120	＞0.9			
GTE2518D-25W-NW40			4000K	2190				
GTE2518D-25W-CW57			5700K	2240				
GTE2518D-40W-WW30	40W	LED CORN E26/E27	3000K	3400	＞0.9			
GTE2518D-40W-NW40			4000K	3520				
GTE2518D-40W-CW57			5700K	3600				
GTE2518D-50W-WW30	50W	LED CORN E26/E27	3000K	4250	＞0.9			
GTE2518D-50W-NW40			4000K	4400				
GTE2518D-50W-CW57			5700K	4500				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

LED POST TOP LIGHT

FEATURES
- Advanced LED Retrofit Technology
- Upgarde Classic Post Top Area Lighting
- Easy Installation and Maintenance
- Non-glare Uniform Light Distribution
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: E27/E26 Bulb
- Driver Brand: GUBO
- Housing: Die-casted Aluminum
- Diffuser: Frosted Tempered Glass Diffuser

INSTALLATION
- Installation: Post-Top Mount
- Mounting: Φ3/4" Gas Threa
- Suitable for Road Light, like Street, Park……

STANDARD
- Designed and Manufactured to Comply with CE/RoHS/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5000K
- Driver Brand: INVENTRONICS,PHILIPS
- Mounting:Φ76mm Post Adaptor
- [POST]: Height 3.5M/4.5M/6M/8M
- [E27]: E26/E27 Fitment Fixture
- Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]

100-277V	SMD3030	60 Months WARRANTY	120°	IP65	IK06	EURO	USA.CA

(B-W1)

(B-L155)

(DT-L305)

(B)

(D)

(B-WD1)

(B-W2)

CASE STUDY:

CUSTOM

DIMENSION: 【UNIT: MM】

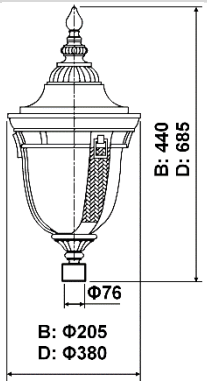

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2519B-15W-WW30	15W	LED CORN E26/E27	3000K	1280	＞0.9	BLR: T5L: 120°	NON	AC100~277V 50/60Hz [DC24V]
GTE2519B-15W-NW40			4000K	1330				
GTE2519B-15W-CW57			5700K	1350				
GTE2519B-25W-WW30	25W	LED CORN E26/E27	3000K	2120	＞0.9			
GTE2519B-25W-NW40			4000K	2190				
GTE2519B-25W-CW57			5700K	2240				
GTE2519D-25W-WW30	25W	LED CORN E26/E27	3000K	2120	＞0.9			
GTE2519D-25W-NW40			4000K	2190				
GTE2519D-25W-CW57			5700K	2240				
GTE2519D-40W-WW30	40W	LED CORN E26/E27	3000K	3400	＞0.9			
GTE2519D-40W-NW40			4000K	3520				
GTE2519D-40W-CW57			5700K	3600				
GTE2519D-50W-WW30	50W	LED CORN E26/E27	3000K	4250	＞0.9			
GTE2519D-50W-NW40			4000K	4400				
GTE2519D-50W-CW57			5700K	4500				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

SOLAR LED POST TOP LIGHT

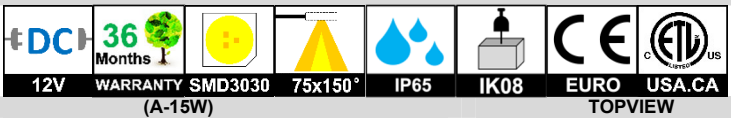

(A-15W) TOPVIEW



[MOTION SENSOR]

(B-20W) (C-30W) REMOTE

INTRODUCTION

FEATURES
- All-in-one Solar Environmental Lighting
- Ideal for Remote Place and ECO-friendly Region
- Latest Integrated die-casting Aluminum Alloy Case
- Intelligent Lighting Mode with Motion Senor
- Color Rendering Index Ra＞70
- Long Lifespan Design＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: BRIDGELUX
- PV Controller Brand: GUBO
- Remote Controller: 30m Remote Control, 4 Mode
- Optics: High Efficiency PC Reflector
- Housing: Die-casted Aluminum
- PV Panel: High Efficiency Monocrystalline Silicon
- Battery: Deep-cycle Li-ion Battery

INSTALLATION
- Mounting Post: Φ75mm
- Wind-force Test: Typhoon 15Level (50M/S)
- Working Day: 3 -7 Cloudy/Rainy days
- Mini Peak Sunshine Hours: Sunhour ≥2 hours
- Suitable for Road Light, like Street, Park……

STANDARDS
- Designed and Manufactured to Comply with CE/RoHS/GS/CB/cUL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTIONS
- LED CCT: 1700K/2200K/2700K/5000K/5700K
- LED Brand: CREE, PHILIPS
- [POST]: Height 3M/4M
- [CSM]: Microwave Motion Sensor
- Housing Color Finish: Customizable(MOQ100pcs)

SILVER [HSV]	BLACK [HBK]	BROWN [HBR]

DIMENSION: 【UNIT: MM】

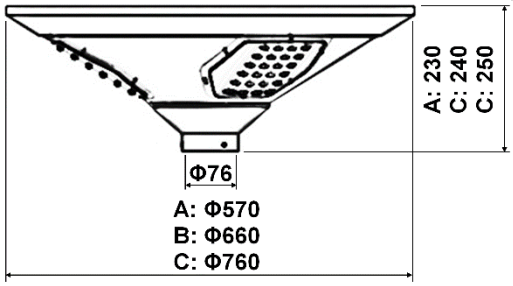

CASE STUDY

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	SYSTEM VOLTAGE	SOLAR PANEL	BATTERY	CONTROLLER
GTE2801A-15W-WW30	15W	3x24x1.5W SMD3030	3000K	2250	DC12V	18V 30WP	12.8V 144WH	REMOTE CONTROLLER PHOTOCELL SENSOR TIMER DIMMER: 5HOUR 100%+ 5HOUR 25% OPTION: [CSM] MICROWAVE MOTION SENSOR STANDY POWER: 30% TIME DELAY: 30S
GTE2801A-15W-NW40			4000K	2320				
GTE2801A-15W-CW57			5700K	2360				
GTE2801B-20W-WW30	20W	3x24x1.5W SMD3030	3000K	3000	DC12V	18V 40WP	12.8V 320WH	
GTE2801B-20W-NW40			4000K	3080				
GTE2801B-20W-CW57			5700K	3120				
GTE2801C-30W-WW30	30W	5x24x1.5W SMD3030	3000K	4500	DC12V	18V 50WP	12.8V 420WH	
GTE2801C-30W-NW40			4000K	4570				
GTE2801C-30W-CW57			5700K	4750				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

SOLAR LED POST TOP LIGHT

FEATURES
- All-in-one Solar Environmental Lighting
- Ideal for Remote Place and ECO-friendly Region
- Latest Integrated die-casting Aluminum Alloy Case
- Intelligent Lighting Mode with Motion Senor
- Color Rendering Index Ra＞70
- Long Lifespan Design＞50,000hours
- Working Temperature: -30℃~50℃

MATERIALS & FINISH
- LED Brand: PHILIPS
- PV Controller Brand: GUBO
- AC Driver Brand: MEANWELL
- Housing: Die-casted Aluminum
- PV Panel: High Efficiency Monocrystalline Silicon
- Battery: Deep-cycle Li-ion Battery
- (A)Optics: High Efficiency PC Lens
- (B)Optics: High Efficiency PC Diffuser

INSTALLATION
- Mounting Post: Φ60mm
- Wind-force Test: Typhoon 15Level (50M/S)
- Working Day: 3 -7 Cloudy/Rainy days
- Mini Peak Sunshine Hours: Sunhour ⩾3 hours
- Suitable for Road Light, like Street, Park……

STANDARDS
- Designed and Manufactured to Comply with
- CE/RoHS/GS/CB/cUL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTIONS
- LED CCT: 1700K/2200K/2700K/5000K/5700K
- LED Brand: CREE, BRIDGELUX
- [POST]: Height 3M
- Housing Color Finish: Customizable(MOQ100pcs)

GREY [HGR]	BLACK [HBK]	WHITE [HWT]



H3M POLE THREE-PART	ANCHOR	INNERVIEW	TOPVIEW

CASE STUDY

DIMENSION: 【UNIT: MM】

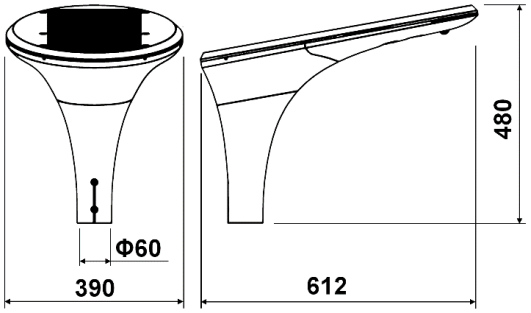

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	BEAM ANGLE	SYSTEM VOLTAGE	SOLAR PANEL	BATTERY	CONTROLLER
GTE2802A-10W-WW30	10W	10x5W SMD5050	3000K	1430	BLP:(P15°): T3M: V80xH150°	DC6V	6V 17.3WP	3.2V 96WH	PHOTOCELL SENSOR MICROWAVE MOTION SENSOR STANDY POWER: 25% TIME DELAY: 30S
GTE2802A-10W-NW40			4000K	1520					
GTE2802A-10W-CW57			5700K	1520					
GTE2802B-10W-WW30	10W	48x1.5W SMD3030	3000K	1350	BLR: T5L: 120°	DC6V	6V 17.3WP	3.2V 96WH	
GTE2802B-10W-NW40			4000K	1420					
GTE2802B-10W-CW57			5700K	1420					

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】
GTE2802A11-30W-WW30	30W	10x5W SMD5050	3000K	3510	＞0.9	BLP:(P15°): T3M: V80xH150°	0/1-10V TRIAC	AC100~277V 50/60Hz [DC24V]
GTE2802A11-30W-NW40			4000K	3730				
GTE2802A11-30W-CW57			5700K	3730				
GTE2802B11-30W-WW30	30W	48x1.5W SMD3030	3000K	3330	＞0.9	BLR: T5L: 120°		
GTE2802B11-30W-NW40			4000K	3540				
GTE2802B11-30W-CW57			5700K	3540				

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

CUSTOM LED BOLLARD & POST

AC | 40 Months | SMD | 60° | IP65 | IK06 | EURO | USA.CA

100-277V WARRANTY

BOLLARD & POST

(P01) (P02) (P03) (P04) (P05) (P06)

INTRODUCTION

FEATURES
- Simple and Elegance Profile
- Anti-glared Comfortable LED Lighting Design
- Skilled Manufacturing Technology
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours

MATERIALS & FINISH
- LED Brand: CREE
- Driver Brand: GUBO
- Housing: Power Coated QS235 Steel or Aluminum
- Optics: Nano Coated Reflecting
- Diffuser: Opal PC Diffuser

INSTALLATION
- Solid Surface Mounted
- Suitable for Garden, Park, Plaza……

STANDARDS
- Designed and Manufactured to Comply with CE/RoHS/TUV/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5700K
- LED Brand: CITIZEN, PHILIPS, EPISTAR

Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	DARK GREY [HGRD]	BROWN [HBR]

DIMENSION:【UNIT: MM】



CUSTOM LANDSCAPE LIGHTING

CASE STUDY: POST

MODEL	POWER【W】	LED TYPE	CCT【K】	LUMEN【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT【V】
GTE2601A-10W-WW30	10W	15x1.5W SMD3030	3000K	1200	＞0.9	BLR: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&PWM ZIGBEE	AC100~277V 50/60HZ [DC24V]
GTE2601A-10W-NW40			4000K	1250				
GTE2601A-10W-CW57			5700K	1250				
GTE2601A42-9W-RGBW	4C@9W	6RGBW	R G B W	900	＞0.5			
GTE2601A-20W-WW30	20W	25x1.5W SMD3030	3000K	2400	＞0.9			
GTE2601A-20W-NW40			4000K	2500				
GTE2601A-20W-CW57			5700K	2500				
GTE2601A42-18W-RGBW	4C@18W	12RGBW	R G B W	900	＞0.5			
GTE2601B-20W-WW30	20W	40x1.5W SMD3030	3000K	2400	＞0.9			
GTE2601B-20W-NW40			4000K	2500				
GTE2601B-20W-CW57			5700K	2500				
GTE2601B-30W-WW30	30W	40x1.5W SMD3030	3000K	3600	＞0.9			
GTE2601B-30W-NW40			4000K	3750				
GTE2601B-30W-CW57			5700K	3750				
GTE2601B42-24W-RGBW	4C@24W	12RGBW	R G B W	2160	＞0.5			
GTE2601C-40W-WW30	40W	60x1.5W SMD3030	3000K	4800	＞0.9			
GTE2601C-40W-NW40			4000K	5000				
GTE2601C-40W-CW57			5700K	5000				
GTE2601C42-36W-RGBW	4C@36W	18RGBW	R G B W	3240	＞0.5			
GTE2601C-50W-WW30	50W	60x1.5W SMD3030	3000K	6000	＞0.9			
GTE2601C-50W-NW40			4000K	6250				
GTE2601C-50W-CW57			5700K	6250				
GTE2601C42-48W-RGBW	4C@48W	24RGBW	R G B W	4320	＞0.5			

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.

Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

CUSTOM LED BOLLARD & POST

FEATURES
- Simple and Elegance Profile
- Anti-glared Comfortable LED Lighting Design
- Skilled Manufacturing Technology
- Color Rendering Index ＞80
- Long Lifespan ＞50,000hours

MATERIALS & FINISH
- LED Brand: CREE
- Driver Brand: GUBO
- Housing: Power Coated QS235 Steel
- Optics: Nano Coated Reflecting
- Diffuser: Opal PC Diffuser

INSTALLATION
- Solid Surface Mounted
- Suitable for Garden, Park, Plaza……

STANDARDS
- Designed and Manufactured to Comply with CE/RoHS/TUV/CB/cETL/SAA Standard
- IP65 Protection, Class Ⅰ Electric

OPTION
- LED CCT: 1700K/2200K/2700K/3500K/5700K
- LED Brand: CITIZEN, PHILIPS, EPISTAR

Housing Color Finish: Customizable

GREY [HGR]	BLACK [HBK]	BROWN [HBR]	DARK BLUE [HBLD]

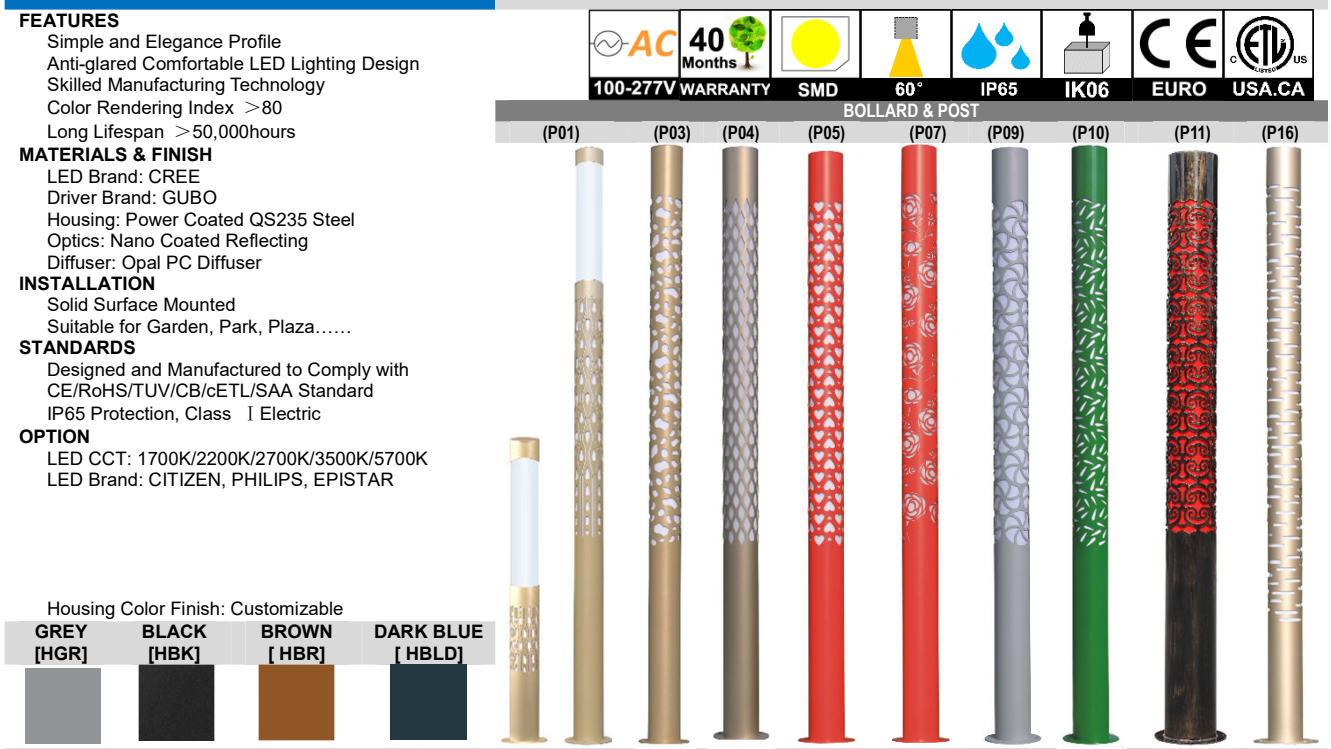

CASE STUDY: POST

CASE STUDY: BOLLARD

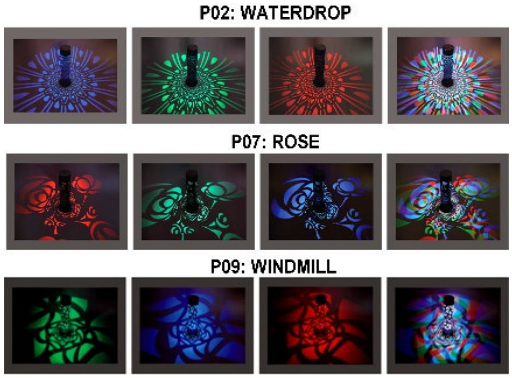

DIMENSION: 【UNIT: MM】



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTE2602C-10W-WW30	10W	15x1.5W SMD3030	3000K	1200	＞0.9	BLR: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&PWM ZIGBEE	AC100~277V 50/60HZ [DC24V]
GTE2602C-10W-NW40			4000K	1250				
GTE2602C-10W-CW57			5700K	1250				
GTE2602C42-9W-RGBW	4C@9W	6RGBW	R G B W	900	＞0.5			
GTE2602C-20W-WW30	20W	25x1.5W SMD3030	3000K	2400	＞0.9			
GTE2602C-20W-NW40			4000K	2500				
GTE2602C-20W-CW57			5700K	2500				
GTE2602C42-18W-RGBW	4C@18W	12RGBW	R G B W	900	＞0.5			
GTE2602E-20W-WW30	20W	40x1.5W SMD3030	3000K	2400	＞0.9			
GTE2602E-20W-NW40			4000K	2500				
GTE2602E-20W-CW57			5700K	2500				
GTE2602E-30W-WW30	30W	40x1.5W SMD3030	3000K	3600	＞0.9			
GTE2602E-30W-NW40			4000K	3750				
GTE2602E-30W-CW57			5700K	3750				
GTE2602E42-24W-RGEW	4C@24W	12RGBW	R G B W	2160	＞0.5			
GTE2602H-40W-WW30	40W	60x1.5W SMD3030	3000K	4800	＞0.9			
GTE2602H-40W-NW40			4000K	5000				
GTE2602H-40W-CW57			5700K	5000				
GTE2602H42-36W-RGBW	4C@36W	18RGBW	R G B W	3240	＞0.5			
GTE2602H-50W-WW30	50W	60x1.5W SMD3030	3000K	6000	＞0.9			
GTE2602H-50W-NW40			4000K	6250				
GTE2602H-50W-CW57			5700K	6250				
GTE2602H42-48W-RGBW	4C@48W	24RGBW	R G B W	4320	＞0.5			

NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.

Charlotte International Partners Inc. 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com