


LED T5 BATTEN LIGHT



ACCESSORIES



MIDDLE CONNECTOR



PLUG CABLE




[ASW1] SWITCH IN WHITE



[ASW2] SWITCH IN RED




DIMENSION: [UNIT: MM]

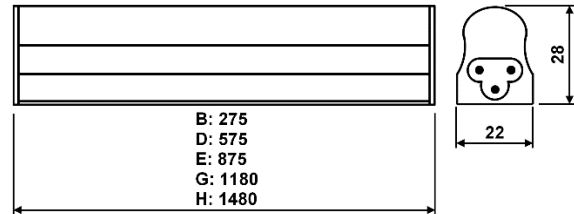

Single Wired

Linkable Wired



INTRODUCTION

FEATURES

- Refined Replacement of Fluorescent T5 batten
- Seamless Linking (Linkable Power: Maxi.200W)
- Long Lifespan Design > 30,000hours
- Working Temperature: -20°C~40°C

MATERIALS & FINISH

- LED Brand: SMD LEDs (LM80)
- Internal Flicker-free Driver Brand: GUBO
- Housing: Aluminum Heat Sink
- Diffuser: Frosted PC Diffuser

INSTALLATION

- Surface Mounted by Clip

STANDARDS

- Designed and Manufactured to Comply with TUV/CE/RoHS/ERP/SAAC/ETL/FCC
- Withstand Voltage: 3.75KV, Surge Protection(L-N):1KV
- IP20 Protection, IK02, Class I Electric

OPTIONS

- LED CCT: 1800K/2700K/3500K/5000K/6000K
- LED Color: Red, Green, Blue, Amber
- Personal Eye Protection Standard: RG0 (EN166:2001)
- Color Rendering Index: Ra90, Ra97
- [ASW]: On/Off Power Switch
- Accessories: Connector Cable 0.3/0.5/1/2m
- Housing Finish Color: Any color in RAL

SILVER [H03]	WHITE [H01]	BLACK [H02]	GREEN [HGN]

CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT 【V】
GTR6501B-5W-WW27	5W	24x0.5W SMD2835	2700K	RA80	530	> 0.9	120°	TRIAC FOLLOWING BY [REMOTE DRIVER] 0/1-10V& DMX512&DALI IR&RF&WIFI PWM&ZIGBEE	AC100~240V [AC100~277V] 50/60Hz [DC24V]
GTR6501B-5W-WW30			3000K		550				
GTR6501B-5W-WW35			3500K		550				
GTR6501B-5W-NW40			4000K		585				
GTR6501B-5W-PW50			5000K		585				
GTR6501B-5W-CW60			6000K		595				
GTR6501B-5W-TW	2C@5W	24TW	WW30 CW60	RA80	550	> 0.9			
GTR6501D-10W-WW27	10W	48x0.5W SMD2835	2700K	RA80	1060	> 0.9			
GTR6501D-10W-WW30			3000K		1090				
GTR6501D-10W-WW35			3500K		1090				
GTR6501D-10W-NW40			4000K		1165				
GTR6501D-10W-PW50			5000K		1165				
GTR6501D-10W-CW60			6000K		1185				
GTR6501D-10W-TW	2C@10W	48TW	WW30 CW60	RA80	1090	> 0.9			
GTR6501E-14W-WW27	14W	72x0.5W SMD2835	2700K	RA80	1580	> 0.9			
GTR6501E-14W-WW30			3000K		1630				
GTR6501E-14W-WW35			3500K		1630				
GTR6501E-14W-NW40			4000K		1750				
GTR6501E-14W-PW50			5000K		1750				
GTR6501E-14W-CW60			6000K		1780				
GTR6501E-14W-TW	2C@14W	72TW	WW30 CW60	RA80	1630	> 0.9			
GTR6501G-18W-WW27	18W	96x0.5W SMD2835	2700K	RA80	2110	> 0.9			
GTR6501G-18W-WW30			3000K		2180				
GTR6501G-18W-WW35			3500K		2180				
GTR6501G-18W-NW40			4000K		2330				
GTR6501G-18W-PW50			5000K		2330				
GTR6501G-18W-CW60			6000K		2360				
GTR6501G-18W-TW	2C@18W	96TW	WW30 CW60	RA80	2180	> 0.9			
GTR6501H-24W-WW27	24W	120x0.5W SMD2835	2700K	RA80	2640	> 0.9			
GTR6501H-24W-WW30			3000K		2720				
GTR6501H-24W-WW35			3500K		2720				
GTR6501H-24W-NW40			4000K		2910				
GTR6501H-24W-PW50			5000K		2910				
GTR6501H-24W-CW60			6000K		2960				
GTR6501H-24W-TW	2C@24W	120TW	WW30 CW60	RA80	2720	> 0.9			