


RECESSED LED DOWNLIGHT

Section 2 B




CIP Lighting Recessed Down Lights utilize the efficient one piece construction, in which the fitting and heat sink are combined in a uniform design.



This collection utilizes translucent acrylic to deliver smooth homogenous lighting performance with reduced glare. We offer a full range of LED diode color options from 1800K to 6000K and Dynamic White.

We also feature Red, Blue Green and Amber diode colors in addition to RGB, RGBW and RGBA color changing on most luminaries.


We also offer a wide assortment of power and control options to insure the perfect lighting instrument for every application.

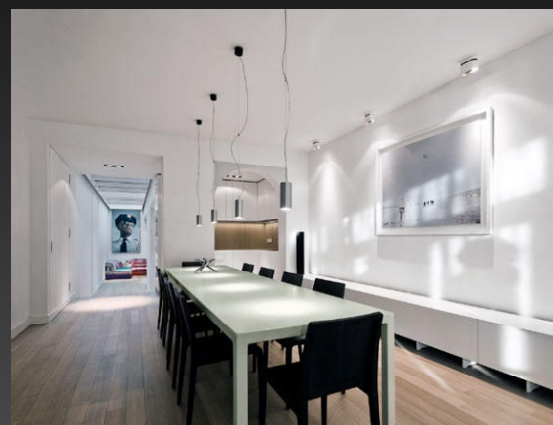

MINI GRID ADJUSTABLE RECESSED LED DOWNLIGHT

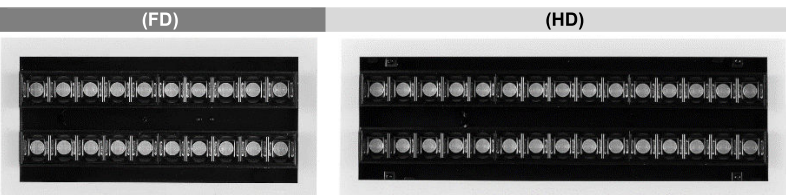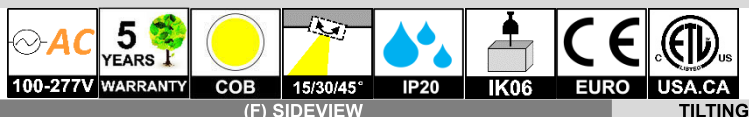

DIMENSION: [UNIT: MM]

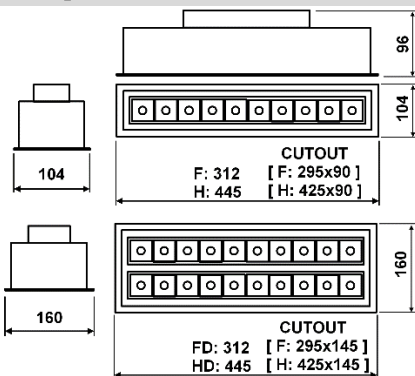

INTRODUCTION

FEATURE

Skilful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤19
Color Rendering Index : Ra≥80
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Reflector
Diffuser: Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Tilting Adjustable ±30°
Suitable for Interior Ceiling Light, like Office.....

STANDARD


Designed and Manufactured to Comply with
TUV/CB/CE/RoHS/EMF/SAA/Erp/ETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric

OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K
Custom Trim Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

CASE STUDY

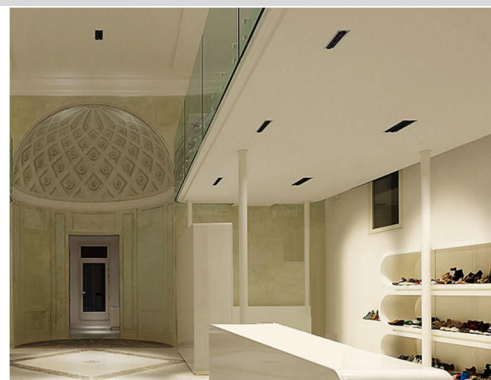

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR2702F-20W-WW27	20W	10x3W OSRAM	2700K	1500	>0.4	BRR: 15/30/45° BRS: 55x55° BRT: 40x65°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]			
GTR2702F-20W-WW30			3000K	1600							
GTR2702F-20W-NW40			4000K	1600							
GTR2702F-20W-CW60			6000K	1700							
GTR2702F-20W-TW	2C@20W	10TW	WW30	CW60	1200				>0.4		
GTR2702F-10W-RGB	3C@10W	10RGB	R	G	B				400	>0.3	
GTR2702F-10W-RGBW	4C@10W	10RGBW	R	G	B				W	600	>0.3
GTR2702H-30W-WW27	30W	15x3W OSRAM	2700K	2250	>0.4						
GTR2702H-30W-WW30			3000K	2400							
GTR2702H-30W-NW40			4000K	2400							
GTR2702H-30W-CW60			6000K	2550							
GTR2702H-30W-TW	2C@30W	15TW	WW30	CW60	1800				>0.4		
GTR2702H-15W-RGB	3C@15W	15RGB	R	G	B				600	>0.4	
GTR2702H-15W-RGBW	4C@15W	15RGBW	R	G	B				W	900	>0.4
GTR2702FD-40W-WW27	2x20W	2x10x3W OSRAM	2700K	2x1500	>0.9						
GTR2702FD-40W-WW30			3000K	2x1600							
GTR2702FD-40W-NW40			4000K	2x1600							
GTR2702FD-40W-CW60			6000K	2x1700							
GTR2702FD-40W-TW	2x2C@20W	2x10TW	WW30	CW60	2x1200				>0.9		
GTR2702FD-20W-RGB	2x3C@10W	2x10RGB	R	G	B				2x400	>0.4	
GTR2702FD-20W-RGBW	2x4C@10W	2x10RGBW	R	G	B				W	2x600	>0.4
GTR2702HD-60W-WW27	2x30W	2x15x3W OSRAM	2700K	2x2250	>0.9						
GTR2702HD-60W-WW30			3000K	2x2400							
GTR2702HD-60W-NW40			4000K	2x2400							
GTR2702HD-60W-CW60			6000K	2x2550							
GTR2702HD-60W-TW	2x2C@30W	2x15TW	WW30	CW60	2x1800				>0.9		
GTR2702HD-30W-RGB	2x3C@15W	2x15RGB	R	G	B				2x600	>0.4	
GTR2702HD-30W-RGBW	2x4C@15W	2x15RGBW	R	G	B				W	2x900	>0.4

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

FEATURE

Skillful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤19
Color Rendering Index : Ra≥80
Long Lifespan Design > 50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: Polarized High Efficiency PC Reflector
Diffuser: Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARD


Designed and Manufactured to Comply with
TUV/CB/CE/RoHS/EMF/SAE/ErP/ETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric

OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K
Custom Trim Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]
			


MINI GRID FIXED RECESSED LED DOWNLIGHT




(H) SIDEVIEW



CASE STUDY

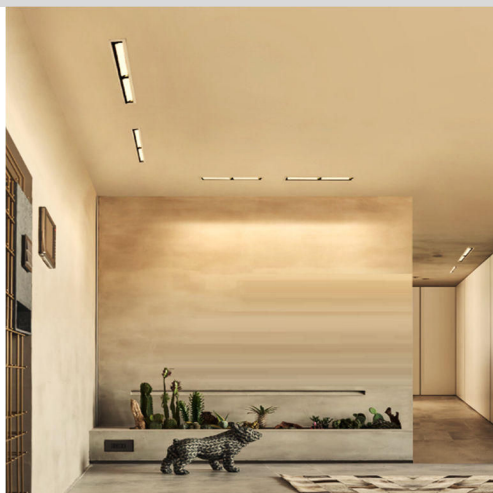


DIMENSION: [UNIT: MM]

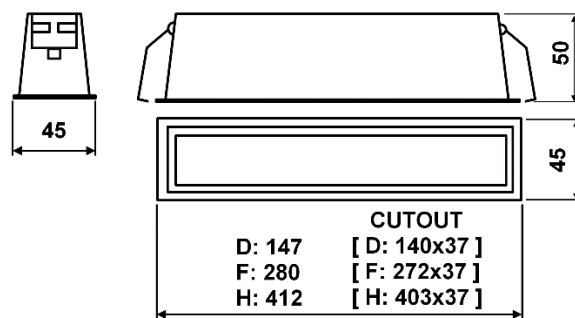


MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR2703D-10W-WW27	10W	5x3W OSRAM	2700K	750	> 0.9	BRP: POLARIZED 60°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]			
GTR2703D-10W-WW30			3000K	800							
GTR2703D-10W-NW40			4000K	800							
GTR2703D-10W-CW60			6000K	850							
GTR2703D-10W-TW	2C@10W	5TW	WW30	CW60	600				> 0.9		
GTR2703D-5W-RGB	3C@5W	5RGB	R	G	B				200	> 0.4	
GTR2703D-5W-RGBW	4C@5W	5RGBW	R	G	B				W	300	> 0.4
GTR2703F-20W-WW27	20W	10x3W OSRAM	2700K	1500	> 0.9						
GTR2703F-20W-WW30			3000K	1600							
GTR2703F-20W-NW40			4000K	1600							
GTR2703F-20W-CW60			6000K	1700							
GTR2703F-20W-TW	2C@20W	10TW	WW30	CW60	1200				> 0.9		
GTR2703F-10W-RGB	3C@10W	10RGB	R	G	B				400	> 0.4	
GTR2703F-10W-RGBW	4C@10W	10RGBW	R	G	B				W	600	> 0.4
GTR2703H-30W-WW27	30W	15x3W OSRAM	2700K	2250	> 0.9						
GTR2703H-30W-WW30			3000K	2400							
GTR2703H-30W-NW40			4000K	2400							
GTR2703H-30W-CW60			6000K	2550							
GTR2703H-30W-TW	2C@30W	15TW	WW30	CW60	1800				> 0.9		
GTR2703H-15W-RGB	3C@15W	15RGB	R	G	B				600	> 0.5	
GTR2703H-15W-RGBW	4C@15W	15RGBW	R	G	B				W	900	> 0.5

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com


MINI GRID TRIMLESS FIXED RECESSED LED DOWNLIGHT



(D) SIDEVIEW

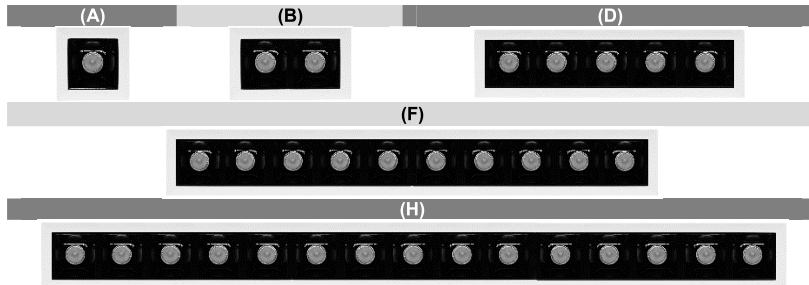

DIMENSION: [UNIT: MM]

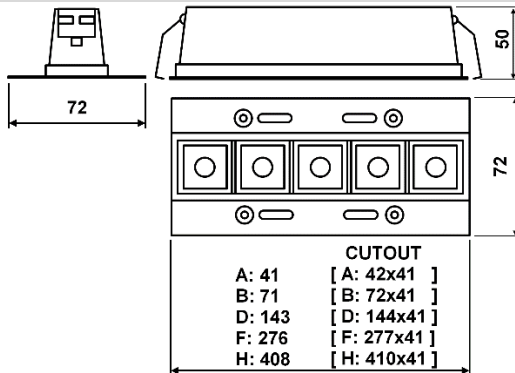

INTRODUCTION

FEATURE

Skillful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤19
Color Rendering Index : Ra≥80
Long Lifespan Design>50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Reflector
Diffuser: Frosted PC Diffuser

INSTALLATION


Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARD

Designed and Manufactured to Comply with
TUV/CB/CE/RoHS/EMF/SAA/Erp/ETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric

OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K
Custom Trim Color Finish: (Any Color in RAL)



CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR2704A-2W-WW27	2W	1x3W OSRAM	2700K	150	>0.4	BRR: 15/30/45° BRS: 55x55° BRT: 40x65°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]			
GTR2704A-2W-WW30			3000K	160							
GTR2704A-2W-NW40			4000K	160							
GTR2704A-2W-CW60			6000K	170							
GTR2704A-2W-TW			2C@2W	1TW					WW30CW60	120	>0.4
GTR2704A31-3W-RGB	3C&1W	1RGB	RGB	40	>0.3						
GTR2704A41-4W-RGBW	4C&1W	1RGBW	RGBW	60	>0.3						
GTR2704B-4W-WW27	4W	2x3W OSRAM	2700K	300	>0.4						
GTR2704B-4W-WW30			3000K	320							
GTR2704B-4W-NW40			4000K	320							
GTR2704B-4W-CW60			6000K	340							
GTR2704B-4W-TW			2C@4W	2TW					WW30CW60	240	>0.4
GTR2704B31-6W-RGB	3C&2W	2RGB	RGB	80	>0.4						
GTR2704B41-8W-RGBW	4C&2W	2RGBW	RGBW	120	>0.4						
GTR2704D-10W-WW27	10W	5x3W OSRAM	2700K	750	>0.9						
GTR2704D-10W-WW30			3000K	800							
GTR2704D-10W-NW40			4000K	800							
GTR2704D-10W-CW60			6000K	850							
GTR2704D-10W-TW			2C@10W	5TW					WW30CW60	600	>0.9
GTR2704D-5W-RGB	3C@5W	5RGB	RGB	200	>0.4						
GTR2704D-5W-RGBW	4C@5W	5RGBW	RGBW	300	>0.4						
GTR2704F-20W-WW27	20W	10x3W OSRAM	2700K	1500	>0.9						
GTR2704F-20W-WW30			3000K	1600							
GTR2704F-20W-NW40			4000K	1600							
GTR2704F-20W-CW60			6000K	1700							
GTR2704F-20W-TW			2C@20W	10TW					WW30CW60	1200	>0.9
GTR2704F-10W-RGB	3C@10W	10RGB	RGB	400	>0.4						
GTR2704F-10W-RGBW	4C@10W	10RGBW	RGBW	600	>0.4						
GTR2704H-30W-WW27	30W	15x3W OSRAM	2700K	2250	>0.9						
GTR2704H-30W-WW30			3000K	2400							
GTR2704H-30W-NW40			4000K	2400							
GTR2704H-30W-CW60			6000K	2550							
GTR2704H-30W-TW			2C@30W	15TW					WW30CW60	1800	>0.9
GTR2704H-15W-RGB	3C@15W	15RGB	RGB	600	>0.5						
GTR2704H-15W-RGBW	4C@15W	15RGBW	RGBW	900	>0.5						

FEATURE

Skillful Manufacture and Uniform Quality
 Low-glare Downlighting, UGR≤19
 Color Rendering Index : Ra≥80
 Long Lifespan Design >50,000hours
 Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
 Remote Flicker-free Driver Brand: GUBO
 Housing: Die-casted Aluminum Housing
 Optics: Polarized High Efficiency PC Reflector
 Diffuser: Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
 Suitable for Interior Ceiling Light, like Office.....

STANDARD

Designed and Manufactured to Comply with
 TUV/CB/CE/RoHS/EMF/SAA/Erp/ETL/FCC
 Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
 IP20 Protection, Class II Electric


OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K
 Custom Trim Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]
			




MINI GRID TRIMLESS FIXED RECESSED LED DOWNLIGHT



(D) SIDEVIEW



(D)



(F)




(H)



CASE STUDY



DIMENSION: [UNIT: MM]

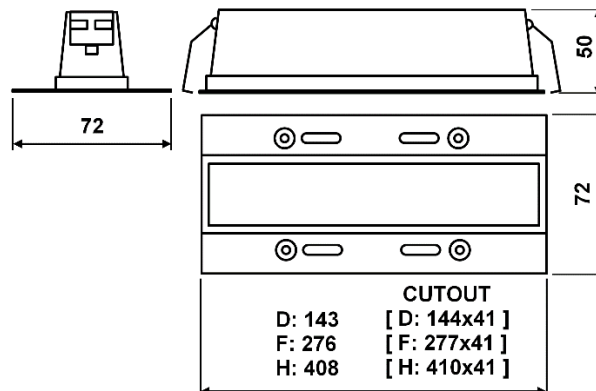

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR2706D-10W-WW27	10W	5x3W OSRAM	2700K	750	>0.9	BRP: POLARIZED 60°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]
GTR2706D-10W-WW30			3000K	800				
GTR2706D-10W-NW40			4000K	800				
GTR2706D-10W-CW60			6000K	850				
GTR2706D-10W-TW			2C@10W	5TW				
GTR2706D-5W-RGB	3C@5W	5RGB	R G B	200	>0.4			
GTR2706D-5W-RGBW	4C@5W	5RGBW	R G B W	300	>0.4			
GTR2706F-20W-WW27	20W	10x3W OSRAM	2700K	1500	>0.9			
GTR2706F-20W-WW30			3000K	1600				
GTR2706F-20W-NW40			4000K	1600				
GTR2706F-20W-CW60			6000K	1700				
GTR2706F-20W-TW			2C@20W	10TW				
GTR2706F-10W-RGB	3C@10W	10RGB	R G B	400	>0.4			
GTR2706F-10W-RGBW	4C@10W	10RGBW	R G B W	600	>0.4			
GTR2706H-30W-WW27	30W	15x3W OSRAM	2700K	2250	>0.9			
GTR2706H-30W-WW30			3000K	2400				
GTR2706H-30W-NW40			4000K	2400				
GTR2706H-30W-CW60			6000K	2550				
GTR2706H-30W-TW			2C@30W	15TW				
GTR2706H-15W-RGB	3C@15W	15RGB	R G B	600	>0.5			
GTR2706H-15W-RGBW	4C@15W	15RGBW	R G B W	900	>0.5			

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
 info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

FEATURE

Skilful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤19
Color Rendering Index : Ra≥80
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Reflector
Diffuser: Frosted PC Diffuser

INSTALLATION

Installation: Surface Mounted
Suitable for Interior Ceiling Light, like Office.....

STANDARD

Designed and Manufactured to Comply with
TUV/CB/CE/RoHS/EMF/SAA/Erp/ETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric


OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K
Custom Trim Color Finish: (Any Color in RAL)


WHITE [H01] BLACK [H02] SILVER [H03] BROWN [H06]




MINI GRID SURFACE MOUNTED LED DOWNLIGHT




(F) SIDEVIEW

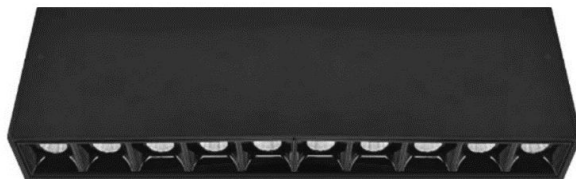


(D)




(F)




(H)



CASE STUDY

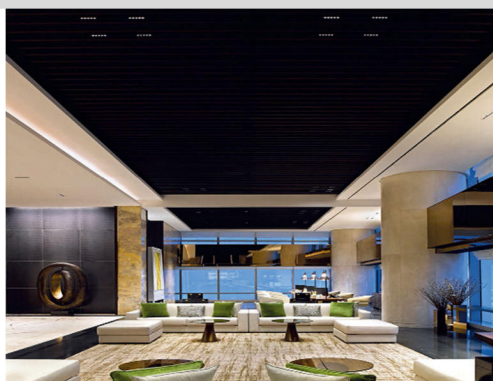


DIMENSION: [UNIT: MM]

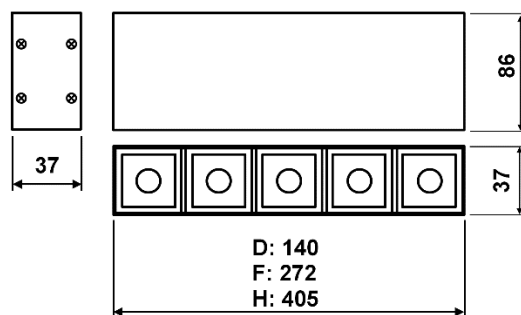


MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR2707D-10W-WW27	10W	5x3W OSRAM	2700K	750	> 0.9	BRR: 15/30/45° BRS: 55x55° BRT: 40x65°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC300mA]			
GTR2707D-10W-WW30			3000K	800							
GTR2707D-10W-NW40			4000K	800							
GTR2707D-10W-CW60			6000K	850							
GTR2707D-10W-TW	2C@10W	5TW	WW30	CW60	600				> 0.9		
GTR2707D-5W-RGB	3C@5W	5RGB	R	G	B				200	> 0.4	
GTR2707D-5W-RGBW	4C@5W	5RGBW	R	G	B				W	300	> 0.4
GTR2707F-20W-WW27	20W	10x3W OSRAM	2700K	1500	> 0.9						
GTR2707F-20W-WW30			3000K	1600							
GTR2707F-20W-NW40			4000K	1600							
GTR2707F-20W-CW60			6000K	1700							
GTR2707F-20W-TW	2C@20W	10TW	WW30	CW60	1200				> 0.9		
GTR2707F-10W-RGB	3C@10W	10RGB	R	G	B	400	> 0.4				
GTR2707F-10W-RGBW	4C@10W	10RGBW	R	G	B	W	600	> 0.4			
GTR2707H-30W-WW27	30W	15x3W OSRAM	2700K	2250	> 0.9						
GTR2707H-30W-WW30			3000K	2400							
GTR2707H-30W-NW40			4000K	2400							
GTR2707H-30W-CW60			6000K	2550							
GTR2707H-30W-TW	2C@30W	15TW	WW30	CW60	1800	> 0.9					
GTR2707H-15W-RGB	3C@15W	15RGB	R	G	B	600	> 0.5				
GTR2707H-15W-RGBW	4C@15W	15RGBW	R	G	B	W	900	> 0.5			


MINI GRID LED TRACK LIGHT




(D)



(F)



DIMENSION: [UNIT: MM]

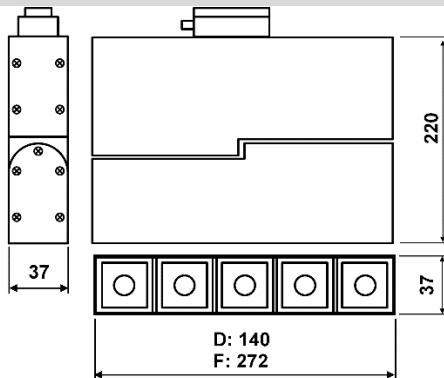

INTRODUCTION

FEATURE

Skilful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤19
Color Rendering Index : Ra≥80
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Reflector
Diffuser: Frosted PC Diffuser
[AT2] Fitment: 2-Wire Single Circuit

INSTALLATION

Suitable for 2-wire Single Circuit Track
Tilting Adjustable+90° and Swivel 335°
Suitable for Interior Ceiling Light, like Shop.....

STANDARD

Designed and Manufactured to Comply with
CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
IP20 Protection, Class II Electric

OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K
[AT3] Version: 3-Wire Single Circuit
[AT4] Fitment: 4-Wire Three Circuit
[AT4D] Fitment: 4-Wire Single Circuit, Dimming
[AT6D] Fitment: 6-Wire Three Circuit, Dimming
[AMR]: Recessed Pendants Light Canopy
Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR2709D-10W-WW27	10W	5x3W OSRAM	2700K	750	>0.9	BRR: 15/30/45° BRS: 55x55° BRT: 40x65°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC300mA]			
GTR2709D-10W-WW30			3000K	800							
GTR2709D-10W-NW40			4000K	800							
GTR2709D-10W-CW60			6000K	850							
GTR2709D-10W-TW			2C@10W	5TW					WW30	CW60	600
GTR2709D-5W-RGB	3C@5W	5RGB	R	G	B				200	>0.4	
GTR2709D-5W-RGBW	4C@5W	5RGBW	R	G	B				W	300	>0.4
GTR2709F-20W-WW27	20W	10x3W OSRAM	2700K	1500	>0.9						
GTR2709F-20W-WW30			3000K	1600							
GTR2709F-20W-NW40			4000K	1600							
GTR2709F-20W-CW60			6000K	1700							
GTR2709F-20W-TW			2C@20W	10TW					WW30	CW60	1200
GTR2709F-10W-RGB	3C@10W	10RGB	R	G	B				400	>0.4	
GTR2709F-10W-RGBW	4C@10W	10RGBW	R	G	B				W	600	>0.4

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

FEATURE

Skillful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤19
Color Rendering Index : Ra≥80
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Reflector
Diffuser: Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARD


Designed and Manufactured to Comply with
TUV/CB/CE/RoHS/EMF/SAA/Erp/ETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric

OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K
Custom Trim Color Finish: (Any Color in RAL)

WHITE [H01] BLACK [H02] SILVER [H03] BROWN [H06]

MINI GRID FIXED RECESSED LED DOWNLIGHT



(G) SIDEVIEW



(C)


(E)




(G)



CASE STUDY


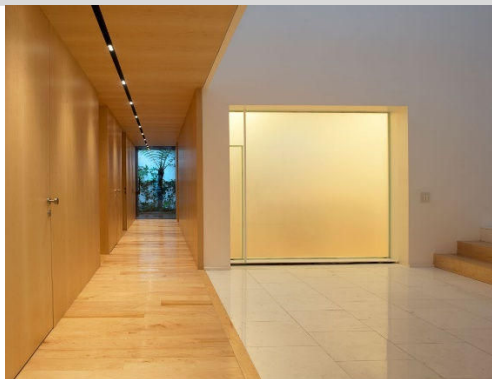


DIMENSION: [UNIT: MM]

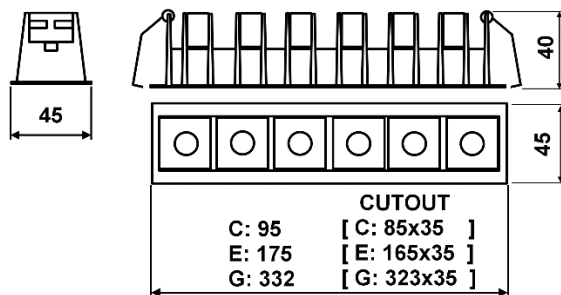


MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR2711C-6W-WW27	6W	3x5W OSRAM	2700K	570	>0.4	BRR: 15/30/45°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]			
GTR2711C-6W-WW30			3000K	620							
GTR2711C-6W-NW40			4000K	660							
GTR2711C-6W-CW60			6000K	660							
GTR2711C-6W-TW	2C@6W	3TW	WW30	CW60	420				>0.4		
GTR2711C-3W-RGB	3C@3W	3RGB	R	G	B				150	>0.3	
GTR2711C-3W-RGBW	4C@3W	3RGBW	R	G	B				W	180	>0.3
GTR2711E-12W-WW27	12W	6x5W OSRAM	2700K	1140	>0.9						
GTR2711E-12W-WW30			3000K	1240							
GTR2711E-12W-NW40			4000K	1330							
GTR2711E-12W-CW60			6000K	1330							
GTR2711E-12W-TW	2C@12W	6TW	WW30	CW60	840				>0.9		
GTR2711E-6W-RGB	3C@6W	6RGB	R	G	B				300	>0.4	
GTR2711E-6W-RGBW	4C@6W	6RGBW	R	G	B				W	360	>0.4
GTR2711G-24W-WW27	24W	12x5W OSRAM	2700K	2450	>0.9						
GTR2711G-24W-WW30			3000K	2650							
GTR2711G-24W-NW40			4000K	2860							
GTR2711G-24W-CW60			6000K	2860							
GTR2711G-24W-TW	2C@24W	12TW	WW30	CW60	1680	>0.9					
GTR2711G-12W-RGB	3C@12W	12RGB	R	G	B	600	>0.4				
GTR2711G-12W-RGBW	4C@12W	12RGBW	R	G	B	W	720	>0.4			

MINI GRID ADJUSTABLE RECESSED LED DOWNLIGHT

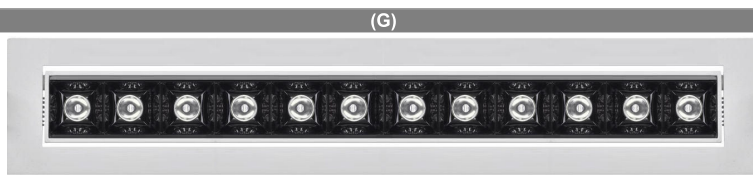

DIMENSION: [UNIT: MM]

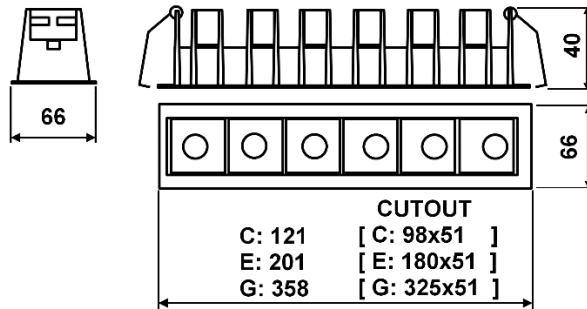

INTRODUCTION

FEATURE

Skillful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤19
Color Rendering Index : Ra≥80
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Reflector
Diffuser: Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Tilting Adjustable ±30°
Suitable for Interior Ceiling Light, like Office.....

STANDARD

Designed and Manufactured to Comply with
TUV/CB/CE/RoHS/EMF/SAA/Erp/ETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric

OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K
Custom Trim Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR2712C-6W-WW27	6W	3x5W OSRAM	2700K	570	>0.4	BRR: 15/30/45°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]			
GTR2712C-6W-WW30			3000K	620							
GTR2712C-6W-NW40			4000K	660							
GTR2712C-6W-CW60			6000K	660							
GTR2712C-6W-TW	2C@6W	3TW	WW30	CW60	420				>0.4		
GTR2712C-3W-RGB	3C@3W	3RGB	R	G	B				150	>0.3	
GTR2712C-3W-RGBW	4C@3W	3RGBW	R	G	B				W	180	>0.3
GTR2712E-12W-WW27	12W	6x5W OSRAM	2700K	1140	>0.9						
GTR2712E-12W-WW30			3000K	1240							
GTR2712E-12W-NW40			4000K	1330							
GTR2712E-12W-CW60			6000K	1330							
GTR2712E-12W-TW	2C@12W	6TW	WW30	CW60	840				>0.9		
GTR2712E-6W-RGB	3C@6W	6RGB	R	G	B				300	>0.4	
GTR2712E-6W-RGBW	4C@6W	6RGBW	R	G	B				W	360	>0.4
GTR2712G-24W-WW27	24W	12x5W OSRAM	2700K	2450	>0.9						
GTR2712G-24W-WW30			3000K	2650							
GTR2712G-24W-NW40			4000K	2860							
GTR2712G-24W-CW60			6000K	2860							
GTR2712G-24W-TW	2C@24W	12TW	WW30	CW60	1680	>0.9					
GTR2712G-12W-RGB	3C@12W	12RGB	R	G	B	600	>0.4				
GTR2712G-12W-RGBW	4C@12W	12RGBW	R	G	B	W	720	>0.4			

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

FEATURE

Skillful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤16
Color Rendering Index : Ra≥80
Long Lifespan Design >50,000hours

Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Lens

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....


STANDARD

Designed and Manufactured to Comply with
TUV/CB/CE/RoHS/EMF/SAA/Erp/ETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric


OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K

MINI GRID FIXED RECESSED LED DOWNLIGHT



(D) SIDEVIEW

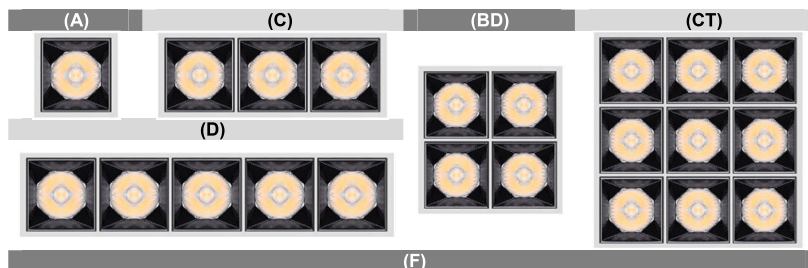


Custom Trim Color Finish: (Any Color in RAL)

WHITE [H01] BLACK [H02] SILVER [H03] BROWN [H06]

CASE STUDY





DIMENSION: [UNIT: MM]

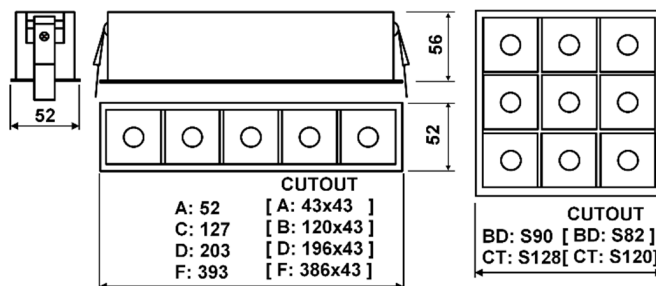


MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR2721A-3W-WW27	3W	1x7W OSRAM	2700K	290	>0.4	BLR: (LENS) 12/24/38/50° BRS: (REFLECTOR) 50x50°, 70x70° 90x90° BRT: (REFLECTOR) 35x70° BRP: POLARIZED 60°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]			
GTR2721A-3W-WW30			3000K	315							
GTR2721A-3W-NW40			4000K	340							
GTR2721A-3W-CW60			6000K	365							
GTR2721A-3W-TW	2C@3W	1TW	WW30 CW60	210	>0.4						
GTR2721A-3W-RGBW	4C@3W	1RGBW	R G B W	180	>0.3						
GTR2721C-9W-WW27	9W	3x7W OSRAM	2700K	875	>0.9						
GTR2721C-9W-WW30			3000K	950							
GTR2721C-9W-NW40			4000K	1020							
GTR2721C-9W-CW60			6000K	1080							
GTR2721C-9W-TW	2C@9W	3TW	WW30 CW60	630	>0.9						
GTR2721C-9W-RGBW	4C@9W	3RGBW	R G B W	540	>0.4						
GTR2721D-15W-WW27	15W	5x7W OSRAM	2700K	1460	>0.9						
GTR2721D-15W-WW30			3000K	1580							
GTR2721D-15W-NW40			4000K	1700							
GTR2721D-15W-CW60			6000K	1820							
GTR2721D-15W-TW	2C@15W	5TW	WW30 CW60	1050	>0.9						
GTR2721D-15W-RGBW	4C@15W	5RGBW	R G B W	900	>0.4						
GTR2721F-30W-WW27	30W	10x7W OSRAM	2700K	2920	>0.9						
GTR2721F-30W-WW30			3000K	3160							
GTR2721F-30W-NW40			4000K	3400							
GTR2721F-30W-CW60			6000K	3650							
GTR2721F-30W-TW	2C@30W	10TW	WW30 CW60	2100	>0.9						
GTR2721F-30W-RGBW	4C@30W	10RGBW	R G B W	1800	>0.5						
GTR2721BD-12W-WW27	12W	4x7W OSRAM	2700K	1165	>0.9						
GTR2721BD-12W-WW30			3000K	1265							
GTR2721BD-12W-NW40			4000K	1360							
GTR2721BD-12W-CW60			6000K	1460							
GTR2721BD-12W-TW	2C@12W	4TW	WW30 CW60	840	>0.9						
GTR2721BD-12W-RGBW	4C@12W	4RGBW	R G B W	720	>0.4						
GTR2721CT-27W-WW27	27W	9x7W OSRAM	2700K	2620	>0.9						
GTR2721CT-27W-WW30			3000K	2840							
GTR2721CT-27W-NW40			4000K	3060							
GTR2721CT-27W-CW60			6000K	3280							
GTR2721CT-27W-TW	2C@27W	9TW	WW30 CW60	1890	>0.9						
GTR2721CT-27W-RGBW	4C@27W	9RGBW	R G B W	1620	>0.4						

MINI GRID ADJUSTABLE RECESSED LED DOWNLIGHT

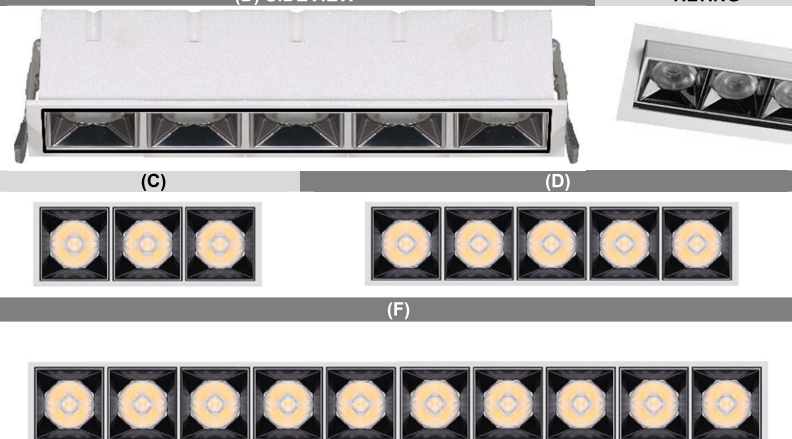

DIMENSION: [UNIT: MM]

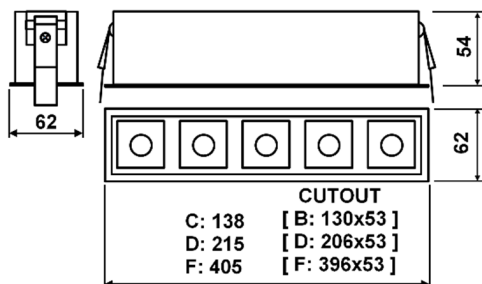

INTRODUCTION

FEATURE

Skillful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤16
Color Rendering Index : Ra≥80
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Lens

INSTALLATION

Installation: False Ceiling Recessed
Tilting Adjustable ±30°
Suitable for Interior Ceiling Light, like Office.....

STANDARD

Designed and Manufactured to Comply with
TUV/CB/CE/RoHS/EMF/SA/Erp/ETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric

OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K
Custom Trim Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】		
GTR2722C-9W-WW27	9W	3x7W OSRAM	2700K	875	>0.9	BLR: (LENS) 12/24/38/50°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]		
GTR2722C-9W-WW30			3000K	950						
GTR2722C-9W-NW40			4000K	1020						
GTR2722C-9W-CW60			6000K	1080						
GTR2722C-9W-TW	2C@9W	3TW	WW30	CW60	>0.9	BRS: (REFLECTOR) 50x50°, 70x70° 90x90°				
GTR2722C-9W-RGBW	4C@9W	3RGBW	R	G	B				W	>0.4
GTR2722D-15W-WW27	15W	5x7W OSRAM	2700K	1460	>0.9					
GTR2722D-15W-WW30			3000K	1580						
GTR2722D-15W-NW40			4000K	1700						
GTR2722D-15W-CW60			6000K	1820						
GTR2722D-15W-TW	2C@15W	5TW	WW30	CW60	>0.9	BRT: (REFLECTOR) 35x70°				
GTR2722D-15W-RGBW	4C@15W	5RGBW	R	G	B				W	>0.4
GTR2722F-30W-WW27	30W	10x7W OSRAM	2700K	2920	>0.9	BRP: POLARIZED 60°				
GTR2722F-30W-WW30			3000K	3160						
GTR2722F-30W-NW40			4000K	3400						
GTR2722F-30W-CW60			6000K	3650						
GTR2722F-30W-TW	2C@30W	10TW	WW30	CW60	>0.9					
GTR2722F-30W-RGBW	4C@30W	10RGBW	R	G	B	W			>0.5	

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

FEATURE

Skillful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤16
Color Rendering Index : Ra≥80
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Lens

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....


STANDARD

Designed and Manufactured to Comply with
TUV/CB/CE/RoHS/EMF/SAA/Erp/ETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric


OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K

MINI GRID TRIMLESS FIXED RECESSED LED DOWNLIGHT




(D) SIDEVIEW

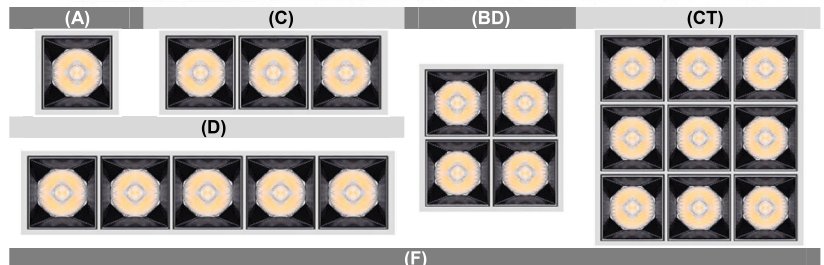


Custom Trim Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

CASE STUDY

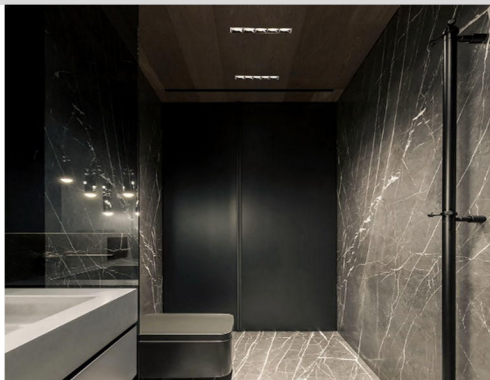


DIMENSION: [UNIT: MM]

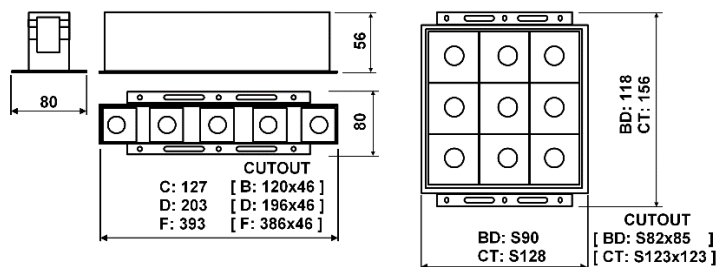


MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】		
GTR2724C-9W-WW27	9W	3x7W OSRAM	2700K	875	>0.9	BLR: (LENS) 12/24/38/50° BRS: (REFLECTOR) 50x50°, 70x70° 90x90° BRT: (REFLECTOR) 35x70° BRP: POLARIZED 60°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]		
GTR2724C-9W-WW30			3000K	950						
GTR2724C-9W-NW40			4000K	1020						
GTR2724C-9W-CW60			6000K	1080						
GTR2724C-9W-TW	2C@9W	3TW	WW30	CW60	630				>0.9	
GTR2724C-9W-RGBW	4C@9W	3RGBW	R	G	B				W	>0.4
GTR2724D-15W-WW27	15W	5x7W OSRAM	2700K	1460	>0.9					
GTR2724D-15W-WW30			3000K	1580						
GTR2724D-15W-NW40			4000K	1700						
GTR2724D-15W-CW60			6000K	1820						
GTR2724D-15W-TW	2C@15W	5TW	WW30	CW60	1050				>0.9	
GTR2724D-15W-RGBW	4C@15W	5RGBW	R	G	B				W	>0.4
GTR2724F-30W-WW27	30W	10x7W OSRAM	2700K	2920	>0.9					
GTR2724F-30W-WW30			3000K	3160						
GTR2724F-30W-NW40			4000K	3400						
GTR2724F-30W-CW60			6000K	3650						
GTR2724F-30W-TW	2C@30W	10TW	WW30	CW60	2100				>0.9	
GTR2724F-30W-RGBW	4C@30W	10RGBW	R	G	B				W	>0.5
GTR2724BD-12W-WW27	12W	4x7W OSRAM	2700K	1165	>0.9					
GTR2724BD-12W-WW30			3000K	1265						
GTR2724BD-12W-NW40			4000K	1360						
GTR2724BD-12W-CW60			6000K	1460						
GTR2724BD-12W-TW	2C@12W	4TW	WW30	CW60	840	>0.9				
GTR2724BD-12W-RGBW	4C@12W	4RGBW	R	G	B	W	>0.4			
GTR2724CT-27W-WW27	27W	9x7W OSRAM	2700K	2620	>0.9					
GTR2724CT-27W-WW30			3000K	2840						
GTR2724CT-27W-NW40			4000K	3060						
GTR2724CT-27W-CW60			6000K	3280						
GTR2724CT-27W-TW	2C@27W	9TW	WW30	CW60	1890	>0.9				
GTR2724CT-27W-RGBW	4C@27W	9RGBW	R	G	B	W	>0.4			

MINI GRID LED TRACK LIGHT



DIMENSION: [UNIT: MM]

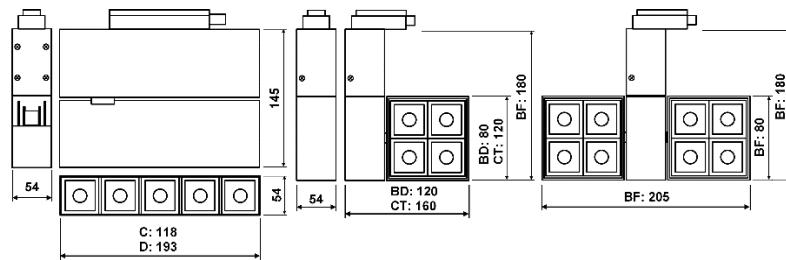

INTRODUCTION

FEATURE

Skilful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤19
Color Rendering Index : Ra≥80
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Lens
[AT2] Track Fitment: 2-Wire Single Circuit

INSTALLATION

Suitable for 2-wire Single Circuit Track
Tilting Adjustable+90° and Swivel 335°
Suitable for Interior Ceiling Light, like Shop.....

STANDARD

Designed and Manufactured to Comply with
CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
IP20 Protection, Class II Electric

OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K
[AT3] Fitment: 3-Wire Single Circuit
[AT4] Fitment: 4-Wire Three Circuit
[AT4D] Fitment: 4-Wire Single Circuit, Dimming
[AT6D] Fitment: 6-Wire Three Circuit, Dimming
[AMP]: Surface Mounted Pendants Light Canopy
[AMR]: Recessed Pendants Light Canopy

Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR2729C-9W-WW27	9W	3x7W OSRAM	2700K	875	>0.9	BLR: (LENS) 12/24/38/50° BRS: (REFLECTOR) 50x50°, 70x70° 90x90° BRT: (REFLECTOR) 35x70° BRP: POLARIZED 60°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]			
GTR2729C-9W-WW30			3000K	950							
GTR2729C-9W-NW40			4000K	1020							
GTR2729C-9W-CW60			6000K	1080							
GTR2729C-9W-TW	2C@9W	3TW	WW30	CW60	630				>0.9		
GTR2729C-9W-RGBW	4C@9W	3RGBW	R	G	B				W	540	>0.4
GTR2729D-15W-WW27	15W	5x7W OSRAM	2700K	1460	>0.9						
GTR2729D-15W-WW30			3000K	1580							
GTR2729D-15W-NW40			4000K	1700							
GTR2729D-15W-CW60			6000K	1820							
GTR2729D-15W-TW	2C@15W	5TW	WW30	CW60	1050				>0.9		
GTR2729D-15W-RGBW	4C@15W	5RGBW	R	G	B				W	900	>0.4
GTR2729BD-12W-WW27	12W	4x7W OSRAM	2700K	1165	>0.9						
GTR2729BD-12W-WW30			3000K	1265							
GTR2729BD-12W-NW40			4000K	1360							
GTR2729BD-12W-CW60			6000K	1460							
GTR2729BD-12W-TW	2C@12W	4TW	WW30	CW60	840	>0.9					
GTR2729BD-12W-RGBW	4C@12W	4RGBW	R	G	B	W			720	>0.5	
GTR2729CT-27W-WW27	27W	9x7W OSRAM	2700K	2620	>0.9						
GTR2729CT-27W-WW30			3000K	2840							
GTR2729CT-27W-NW40			4000K	3060							
GTR2729CT-27W-CW60			6000K	3280							
GTR2729CT-27W-TW	2C@27W	9TW	WW30	CW60	1890	>0.9					
GTR2729CT-27W-RGBW	4C@27W	9RGBW	R	G	B	W			1620	>0.4	
GTR2729BF-24W-WW27	2x12W	2x4x7W OSRAM	2700K	2x1165	>0.9						
GTR2729BF-24W-WW30			3000K	2x1265							
GTR2729BF-24W-NW40			4000K	2x1360							
GTR2729BF-24W-CW60			6000K	2x1460							
GTR2729BF-24W-TW	2x2C@12W	2x4TW	WW30	CW60	2x840	>0.9					
GTR2729BF-24W-RGBW	2x4C@12W	2x4RGBW	R	G	B	W			2x720	>0.4	

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

FEATURE

Skillful Manufacture and Uniform Quality
Low-glare Downlighting, UGR≤16
Color Rendering Index : Ra≥80
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: OSRAM
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: High Efficiency PC Lens

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....



STANDARD

Designed and Manufactured to Comply with
TUV/CB/CE/RoHS/EMF/SAA/Erp/ETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric

OPTION

LED CCT: 1800K/2700K/3500K/5000K/6000K


MINI GRID TRIMLESS FIXED RECESSED LED DOWNLIGHT

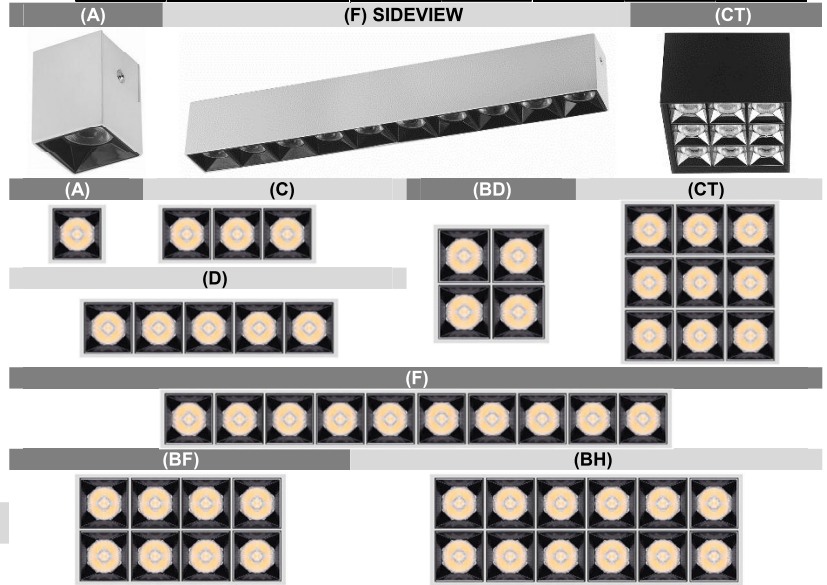


Custom Trim Color Finish: (Any Color in RAL)

WHITE [H01] BLACK [H02] SILVER [H03] BROWN [H06]

CASE STUDY

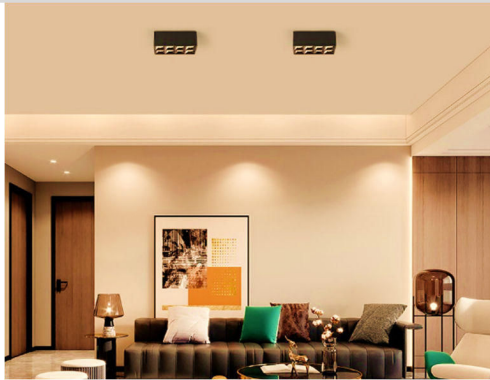

DIMENSION: [UNIT: MM]

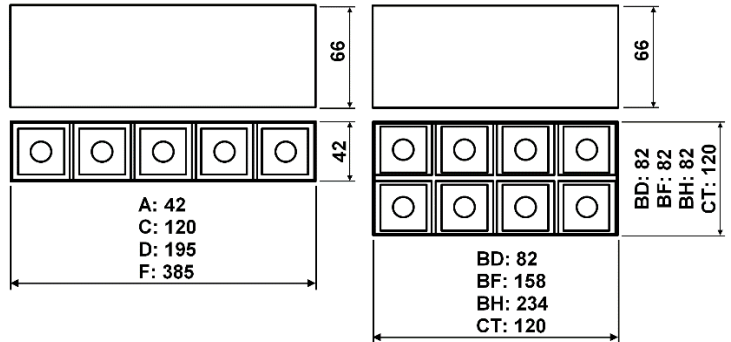

MODEL	POWER [W]	LED TYPE	CCT [K]	LUMEN [LM]	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT [V]
GTR2737A-3W-WW27	3W	1x7W OSRAM	2700K	290	>0.9	BLR: (LENS) 12/24/38/50° BRS: (REFLECTOR) 50x50°, 70x70° 90x90° BRT: (REFLECTOR) 35x70° BRP: POLARIZED 60°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [CV DC24V] [CC700mA]
GTR2737A-3W-WW30			3000K	315				
GTR2737A-3W-NW40			4000K	340				
GTR2737A-3W-CW60			6000K	365				
GTR2737A-3W-TW	2C@3W	1TW	WW30, CW60	210	>0.9			
GTR2737C-9W-WW27	9W	3x7W OSRAM	2700K	875	>0.9			
GTR2737C-9W-WW30			3000K	950				
GTR2737C-9W-NW40			4000K	1020				
GTR2737C-9W-CW60			6000K	1080				
GTR2737C-9W-TW	2C@9W	3TW	WW30, CW60	630	>0.9			
GTR2737D-15W-WW27	15W	5x7W OSRAM	2700K	1460	>0.9			
GTR2737D-15W-WW30			3000K	1580				
GTR2737D-15W-NW40			4000K	1700				
GTR2737D-15W-CW60			6000K	1820				
GTR2737D-15W-TW	2C@15W	5TW	WW30, CW60	1050	>0.9			
GTR2737E-30W-WW27	30W	10x7W OSRAM	2700K	2920	>0.9			
GTR2737E-30W-WW30			3000K	3160				
GTR2737E-30W-NW40			4000K	3400				
GTR2737E-30W-CW60			6000K	3650				
GTR2737E-30W-TW	2C@30W	10TW	WW30, CW60	2100	>0.9			
GTR2737BD-12W-WW27	12W	4x7W OSRAM	2700K	1165	>0.9			
GTR2737BD-12W-WW30			3000K	1265				
GTR2737BD-12W-NW40			4000K	1360				
GTR2737BD-12W-CW60			6000K	1460				
GTR2737BD-12W-TW	2C@12W	4TW	WW30, CW60	840	>0.9			
GTR2737BF-24W-WW27	24W	8x7W OSRAM	2700K	2180	>0.9			
GTR2737BF-24W-WW30			3000K	2370				
GTR2737BF-24W-NW40			4000K	2550				
GTR2737BF-24W-CW60			6000K	2730				
GTR2737BF-24W-TW	2C@24W	8TW	WW30, CW60	1680	>0.9			
GTR2737BH-36W-WW27	36W	12x7W OSRAM	2700K	3500	>0.9			
GTR2737BH-36W-WW30			3000K	3790				
GTR2737BH-36W-NW40			4000K	4080				
GTR2737BH-36W-CW60			6000K	4375				
GTR2737BH-36W-TW	2C@36W	12TW	WW30, CW60	2520	>0.9			
GTR2737CT-27W-WW27	27W	9x7W OSRAM	2700K	2620	>0.9			
GTR2737CT-27W-WW30			3000K	2840				
GTR2737CT-27W-NW40			4000K	3060				
GTR2737CT-27W-CW60			6000K	3280				
GTR2737CT-27W-TW	2C@27W	9TW	WW30, CW60	1890	>0.9			



GIMBAL SEMI-RECESSED LED SPOTLIGHT

【Single】 【Twin】 【Triple】



These spotlights are with gimbal multiple fixture to offer multiple illumination, to achieve accent lighting, focus lighting.

Multi choices of the lighting angle can offer more accurate way of lighting.


Multi dimming mode can offer the intelligent working and much more efficient.

Our gimbal spotlight adopt branding COB LED source with high color rendering. And our products are with 5years warranty to offer the real high-end application.

Widely application in shop, restaurant, hotel, office, showroom, club, cloakroom...



GIMBAL SEMI-RECESSED LED SPOTLIGHT



(A) (B) TILTING

(C) (D) (E) TILTING

SIDEVIEW



INTRODUCTION

FEATURE

Flip-down Modular Structure
Optimized Ceiling Gimbal Lighting
Low-glare Downlighting, UGRs22
Long Lifespan Design > 50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: CREE
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Radiator Housing
Optics: High Efficiency PC Reflector
Diffuser: Clear PC Diffuser

INSTALLATION

False Ceiling Recessed
Tilt Adjustable +65°, Horizontal Swivel 350°
Suitable for Interior Ceiling Light, like Lobby, Mall.....

STANDARD

Designed and Manufactured to Comply with
CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
IP20 Protection, Class II Electric

OPTION


LED Color Temperature: CCT2700~6000K
Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

DIMENSION: [UNIT: MM]

[L5]: 5MM

CASE STUDY

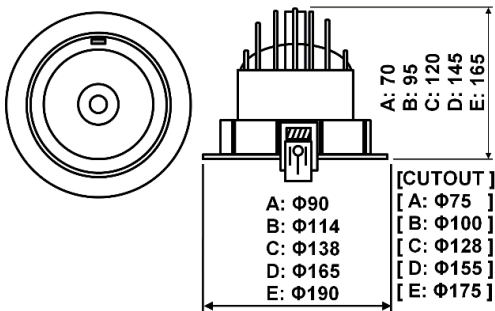

MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI 【RA】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR3101A-8W-WW30	8W	CXA1507 CREE COB	3000K	RA80	685	>0.9	BRR: 24/45°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3101A-8W-NW40			4000K		735				
GTR3101A-8W-PW50			5000K		735				
GTR3101A-8W-WW30H			H3000K	RA95	525				
GTR3101A-8W-NW40H			H4000K		595				
GTR3101A-8W-TW	2C@8W	12TW	WW27 CW60	RA80	560	>0.8			
GTR3101B-12W-WW30	12W	CXA1512 CREE COB	3000K	RA80	1030	>0.9	BRR: 15/24° 38/60°		
GTR3101B-12W-NW40			4000K		1100				
GTR3101B-12W-PW50			5000K		1100				
GTR3101B-12W-WW30H			H3000K	RA95	790				
GTR3101B-12W-NW40H			H4000K		890				
GTR3101B-15W-WW30	15W	CXA1512 CREE COB	3000K	RA80	1200	>0.9			
GTR3101B-15W-NW40			4000K		1280				
GTR3101B-15W-PW50			5000K		1280				
GTR3101B-15W-WW30H			H3000K	RA95	920				
GTR3101B-15W-NW40H			H4000K		1040				
GTR3101B-15W-TW	2C@15W	18TW	WW27 CW60	RA80	1050	>0.9			
GTR3101B41-12W-RGBW	4C&3W	3RGBW	R G B W	/	360	>0.4			
GTR3101C-20W-WW30	20W	CXA1820 CREE COB	3000K	RA80	1720	>0.9	BRR: 15/24° 38/60°		
GTR3101C-20W-NW40			4000K		1840				
GTR3101C-20W-PW50			5000K		1840				
GTR3101C-20W-WW30H			H3000K	RA95	1310				
GTR3101C-20W-NW40H			H4000K		1490				
GTR3101C-20W-TW	2C@20W	36TW	WW27 CW60	RA80	1400	>0.8			
GTR3101C-24W-WW30	24W	CXA1820 CREE COB	3000K	RA80	2070	>0.9			
GTR3101C-24W-NW40			4000K		2200				
GTR3101C-24W-PW50			5000K		2200				
GTR3101C-24W-WW30H			H3000K	RA95	1575				
GTR3101C-24W-NW40H			H4000K		1785				
GTR3101C-24W-TW	2C@24W	36TW	WW27 CW60	RA80	1680	>0.8			
GTR3101C41-24W-RGBW	4C&6W	6RGBW	R G B W	/	1200	>0.6			
GTR3101D-30W-WW30	30W	CXA1830 CREE COB	3000K	RA80	2580	>0.9	BRR: 15/24° 38/60°		
GTR3101D-30W-NW40			4000K		2760				
GTR3101D-30W-PW50			5000K		2760				
GTR3101D-30W-WW30H			H3000K	RA95	1970				
GTR3101D-30W-NW40H			H4000K		2230				
GTR3101D-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	>0.8			
GTR3101D41-30W-RGBW	4C&10W	10RGBW	R G B W	/	1500	>0.4			
GTR3101E-40W-WW30	40W	CXA2540 CREE COB	3000K	RA80	3440	>0.9	BRR: 24° 38/60°		
GTR3101E-40W-NW40			4000K		3675				
GTR3101E-40W-PW50			5000K		3675				
GTR3101E-40W-WW30H			H3000K	RA95	2620				
GTR3101E-40W-NW40H			H4000K		2975				
GTR3101E-40W-TW	2C@40W	48TW	WW27 CW60	RA80	2800	>0.8			
GTR3101E-50W-WW30	50W	CXA2540 CREE COB	3000K	RA80	4130	>0.9			
GTR3101E-50W-NW40			4000K		4410				
GTR3101E-50W-PW50			5000K		4410				
GTR3101E-50W-WW30H			H3000K	RA95	3150				
GTR3101E-50W-NW40H			H4000K		3570				
GTR3101E-50W-TW	2C@50W	48TW	WW27 CW60	RA80	3500	>0.8			
GTR3101E41-48W-RGBW	4C&12W	6RGBW	R G B W	/	2640	>0.6			

INTRODUCTION

FEATURE

Flip-down Modular Structure
Optimized Ceiling Gimbal Lighting
Low-glare Downlighting, UGR≤22
Long Lifespan Design >50,000hours

Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: CREE
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Radiator Housing
Optics: PC Reflector with Frosted Lens
Diffuser: Clear PC Diffuser

INSTALLATION

False Ceiling Recessed
Tilt Adjustable +65°, Horizontal Swivel 350°
Suitable for Interior Ceiling Light, like Lobby, Mall.....

STANDARD


Designed and Manufactured to Comply with
CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
IP20 Protection, Class II Electric

OPTION


LED Color Temperature: CCT2700~6000K
Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

GIMBAL SEMI-RECESSED LED SPOTLIGHT



CASE STUDY


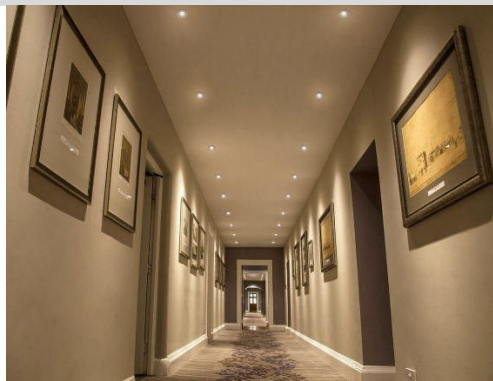


[L5]: 5MM

DIMENSION: [UNIT: MM]




[F]: FROSTED



MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI 【RA】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR3102D-8W-WW30	8W	CXA1507 CREE COB	3000K	RA80	685	>0.9	BRR: 15/24/38°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3102D-8W-NW40			4000K		735				
GTR3102D-8W-PW50			5000K		735				
GTR3102D-8W-WW30H			H3000K	525					
GTR3102D-8W-NW40H			H4000K	595					
GTR3102D-12W-WW30	12W	CXA1512 CREE COB	3000K	RA80	1030	>0.9			
GTR3102D-12W-NW40			4000K		1100				
GTR3102D-12W-PW50			5000K		1100				
GTR3102D-12W-WW30H			H3000K	790					
GTR3102D-12W-NW40H			H4000K	890					
GTR3102D-12W-TW	2C@12W	18TW	WW27 CW60	RA80	840	>0.8			
GTR3102D-15W-WW30	15W	CXA1512 CREE COB	3000K	RA80	1200	>0.9			
GTR3102D-15W-NW40			4000K		1280				
GTR3102D-15W-PW50			5000K		1280				
GTR3102D-15W-WW30H			H3000K	920					
GTR3102D-15W-NW40H			H4000K	1040					
GTR3102D-15W-TW	2C@15W	18TW	WW27 CW60	RA80	1050	>0.9			
GTR3102E-20W-WW30	20W	CXA1820 CREE COB	3000K	RA80	1720	>0.9	BRR: 15/24/38°		
GTR3102E-20W-NW40			4000K		1840				
GTR3102E-20W-PW50			5000K		1840				
GTR3102E-20W-WW30H			H3000K	1310					
GTR3102E-20W-NW40H			H4000K	1490					
GTR3102E-20W-TW	2C@20W	36TW	WW27 CW60	RA80	1400	>0.9			
GTR3102E-24W-WW30	24W	CXA1820 CREE COB	3000K	RA80	2070	>0.9			
GTR3102E-24W-NW40			4000K		2200				
GTR3102E-24W-PW50			5000K		2200				
GTR3102E-24W-WW30H			H3000K	1575					
GTR3102E-24W-NW40H			H4000K	1785					
GTR3102E-24W-TW	2C@24W	36TW	WW27 CW60	RA80	1680	>0.9			
GTR3102F-30W-WW30	30W	CXA1830 CREE COB	3000K	RA80	2580	>0.9	BRR: 15/24/38°		
GTR3102F-30W-NW40			4000K		2760				
GTR3102F-30W-PW50			5000K		2760				
GTR3102F-30W-WW30H			H3000K	1970					
GTR3102F-30W-NW40H			H4000K	2230					
GTR3102F-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	>0.8			
GTR3102G-40W-WW30	40W	CXA1830 CREE COB	3000K	RA80	3440	>0.9	BRR: 15/24/38°		
GTR3102G-40W-NW40			4000K		3675				
GTR3102G-40W-PW50			5000K		3675				
GTR3102G-40W-WW30H			H3000K	2620					
GTR3102G-40W-NW40H			H4000K	2975					
GTR3102G-40W-TW	2C@40W	48TW	WW27 CW60	RA80	2800	>0.8			

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

GIMBAL SEMI-RECESSED LED SPOTLIGHT



(A) (B) (C) (D) TILTING

(E) TILTING

SIDEVIEW



PUSH-IN



[H02]



INTRODUCTION

FEATURE

- Flip-down Modular Structure
- Optimized Ceiling Gimbal Lighting
- Low-glare Downlighting, UGR≤22
- Long Lifespan Design>50,000hours
- Working Temperature: -20°C~40°C

MATERIAL & FINISH

- LED Brand: CREE
- Remote Flicker-free Driver Brand: GUBO
- Housing: Die-casted Aluminum Radiator Housing
- Optics: High Efficiency Clear PC Lens
- Diffuser: Clear PC Diffuser

INSTALLATION

- False Ceiling Recessed
- Tilt Adjustable +65°, Horizontal Swivel 350°
- Suitable for Interior Ceiling Light, like Lobby, Mall,.....

STANDARD


- Designed and Manufactured to Comply with CE/RoHS/EMF/TUV/CB/SA/Erp/cUL/FCC
- IP20 Protection, Class II Electric

OPTION


- LED Color Temperature: CCT2700~6000K
- Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

DIMENSION: [UNIT: MM]

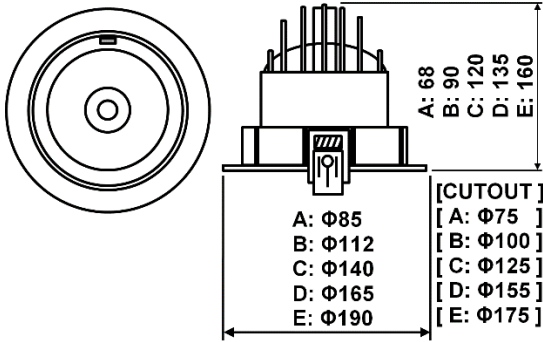

CASE STUDY

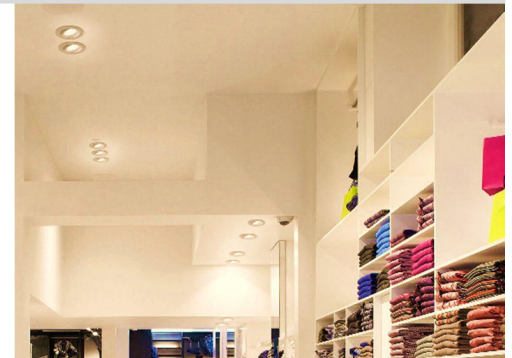

MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI 【RA】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR3103A-8W-WW30	8W	CXA1507 CREE COB	3000K	RA80	685	>0.9	BLR: 15/24/36°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3103A-8W-NW40			4000K		735				
GTR3103A-8W-PW50			5000K		735				
GTR3103A-8W-WW30H			H3000K		525				
GTR3103A-8W-NW40H			H4000K		595				
GTR3103A-8W-TW	2C@8W	12TW	WW27 CW60	RA80	560	>0.8			
GTR3103B-12W-WW30	12W	CXA1512 CREE COB	3000K	RA80	1030	>0.9	BLR: 15/24/36°		
GTR3103B-12W-NW40			4000K		1100				
GTR3103B-12W-PW50			5000K		1100				
GTR3103B-12W-WW30H			H3000K		790				
GTR3103B-12W-NW40H			H4000K		890				
GTR3103B-15W-WW30	15W	CXA1512 CREE COB	3000K	RA80	1200	>0.9			
GTR3103B-15W-NW40			4000K		1280				
GTR3103B-15W-PW50			5000K		1280				
GTR3103B-15W-WW30H			H3000K		920				
GTR3103B-15W-NW40H			H4000K		1040				
GTR3103B-15W-TW	2C@15W	18TW	WW27 CW60	RA80	1050	>0.9			
GTR3103C-20W-WW30	20W	CXA1820 CREE COB	3000K	RA80	1720	>0.9	BLR: 15/24° 38/60°		
GTR3103C-20W-NW40			4000K		1840				
GTR3103C-20W-PW50			5000K		1840				
GTR3103C-20W-WW30H			H3000K		1310				
GTR3103C-20W-NW40H			H4000K		1490				
GTR3103C-20W-TW	2C@20W	36TW	WW27 CW60	RA80	1400	>0.8			
GTR3103C-24W-WW30	24W	CXA1820 CREE COB	3000K	RA80	2070	>0.9			
GTR3103C-24W-NW40			4000K		2200				
GTR3103C-24W-PW50			5000K		2200				
GTR3103C-24W-WW30H			H3000K		1575				
GTR3103C-24W-NW40H			H4000K		1785				
GTR3103C-24W-TW	2C@24W	36TW	WW27 CW60	RA80	1680	>0.8			
GTR3103D-30W-WW30	30W	CXA1830 CREE COB	3000K	RA80	2580	>0.9	BLR: 15/24° 36/60°		
GTR3103D-30W-NW40			4000K		2760				
GTR3103D-30W-PW50			5000K		2760				
GTR3103D-30W-WW30H			H3000K		1970				
GTR3103D-30W-NW40H			H4000K		2230				
GTR3103D-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	>0.8			
GTR3103E-40W-WW30	40W	CXA1830 CREE COB	3000K	RA80	3440	>0.9	BLR: 15/24° 36/60°		
GTR3103E-40W-NW40			4000K		3675				
GTR3103E-40W-PW50			5000K		3675				
GTR3103E-40W-WW30H			H3000K		2620				
GTR3103E-40W-NW40H			H4000K		2975				
GTR3103E-40W-TW	2C@40W	48TW	WW27 CW60	RA80	2800	>0.8			
GTR3103E-50W-WW30	50W	CXA1830 CREE COB	3000K	RA80	4130	>0.9			
GTR3103E-50W-NW40			4000K		4410				
GTR3103E-50W-PW50			5000K		4410				
GTR3103E-50W-WW30H			H3000K		3150				
GTR3103E-50W-NW40H			H4000K		3570				
GTR3103E-50W-TW	2C@50W	48TW	WW27 CW60	RA80	3500	>0.8			

FEATURE

Flip-down Modular Structure
Long Lifespan Design>50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: CITIZEN & CREE
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Radiator Housing
Optics: PC Reflector with PC lens(RGBW without Lens)
Diffuser: Clear PC Diffuser

INSTALLATION

False Ceiling Recessed
Tilt Adjustable +65°, Horizontal Swivel 350°
Suitable for Interior Ceiling Light, like Lobby, Mall.....

STANDARD

Designed and Manufactured to Comply with
CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
IP20 Protection, Class II Electric

OPTION

LED Color Temperature: CCT2700~6000K
[IP65]: Tempered Clear Glass
Custom Housing Color Finish: (Any Color in RAL)


WHITE	BLACK	SILVER	GOLDEN
			



SIDEVIEW



FRONTVIEW



[H02]



[L5]: 5MM




[F]: FROSTED



CASE STUDY




DIMENSION: [UNIT: MM]

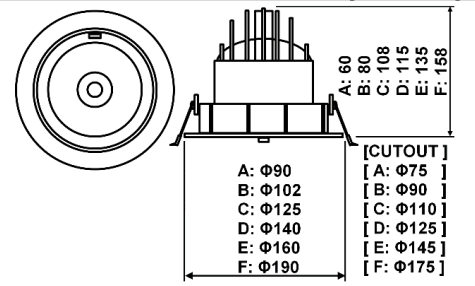

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI [RA]	LUMEN [LM]	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT [V]
GTR3105A-10W-WW30	10W	1204C4 CITIZEN	3000K	RA80	995	>0.9	BRR: 15/24/36/60°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3105A-10W-NW40			4000K		1020				
GTR3105A-10W-PW50			5000K		1060				
GTR3105A-10W-WW30G			G3000K	880					
GTR3105A-10W-NW40G			G4000K	890					
GTR3105A-10W-WW30H			H3000K	750					
GTR3105A-10W-NW40H			H4000K	770					
GTR3105A-12W-TW			2C@12W	18TW	WW27 CW60				
GTR3105A41-12W-RGBW	4C&3W	3RGBW	R G B W	/	360	>0.3			
GTR3105B-15W-WW30	15W	1204C4 CITIZEN	3000K	RA80	1390	>0.9	BRR: 15/24/36/60°		
GTR3105B-15W-NW40			4000K		1430				
GTR3105B-15W-PW50			5000K		1450				
GTR3105B-15W-WW30G			G3000K	1230					
GTR3105B-15W-NW40G			G4000K	1250					
GTR3105B-15W-WW30H			H3000K	1050					
GTR3105B-15W-NW40H			H4000K	1080					
GTR3105B-15W-TW			2C@15W	18TW	WW27 CW60				
GTR3105C-20W-WW30	20W	1206C4 CITIZEN	3000K	RA80	1960	>0.9	BRR: 15/24/36/60°		
GTR3105C-20W-NW40			4000K		2020				
GTR3105C-20W-PW50			5000K		2050				
GTR3105C-20W-WW30G			G3000K	1750					
GTR3105C-20W-NW40G			G4000K	1780					
GTR3105C-20W-WW30H			H3000K	1500					
GTR3105C-20W-NW40H			H4000K	1540					
GTR3105C-20W-TW			2C@20W	36TW	WW27 CW60				
GTR3105C41-24W-RGBW	4C&6W	6RGBW	R G B W	\	720	>0.4			
GTR3105C44-18W-RGBW	4C@18W	6RGBW	R G B W	\	980	>0.4	BRR: 60°		
GTR3105D-24W-WW30	24W	1206C4 CITIZEN	3000K	RA80	2250	>0.9	BRR: 15/24/36/60°		
GTR3105D-24W-NW40			4000K		2320				
GTR3105D-24W-PW50			5000K		2350				
GTR3105D-24W-WW30G			G3000K	1980					
GTR3105D-24W-NW40G			G4000K	2050					
GTR3105D-24W-WW30H			H3000K	1680					
GTR3105D-24W-NW40H			H4000K	1730					
GTR3105D-24W-TW			2C@24W	36TW	WW27 CW60				
GTR3105D44-24W-RGBW	4C@24W	12RGBW	R G B W	\	1280	>0.5	BRR: 60°		
GTR3105E-35W-WW30	35W	1208C4 CITIZEN	3000K	RA80	3380	>0.9	BRR: 15/24/36/60°		
GTR3105E-35W-NW40			4000K		3480				
GTR3105E-35W-PW50			5000K		3530				
GTR3105E-35W-WW30G			G3000K	2980					
GTR3105E-35W-NW40G			G4000K	3080					
GTR3105E-35W-WW30H			H3000K	2520					
GTR3105E-35W-NW40H			H4000K	2600					
GTR3105E-35W-TW			2C@35W	48TW	WW27 CW60				
GTR3105E43-48W-RGBW	4C&12W	6RGBW	R G B W	\	1440	>0.4			
GTR3105E44-36W-RGBW	4C@36W	12RGBW	R G B W	\	1950	>0.4	BLR: 60°		
GTR3105F-50W-WW30	50W	1210C4 CITIZEN	3000K	RA80	4690	>0.9	BRR: 15/24/36/60°		
GTR3105F-50W-NW40			4000K		4830				
GTR3105F-50W-PW50			5000K		4900				
GTR3105F-50W-WW30G			G3000K	3670					
GTR3105F-50W-NW40G			G4000K	3830					
GTR3105F-50W-WW30H			H3000K	3360					
GTR3105F-50W-NW40H			H4000K	3460					
GTR3105F-50W-TW			2C@50W	60TW	WW27 CW60			RA80	3500
GTR3105F43-54W-RGBW	4C&18W	6RGBW	R G B W	\	1620	>0.5			
GTR3105F44-54W-RGBW	4C@54W	18RGBW	R G B W	\	2920	>0.5	BRR: 60°		

GIMBAL SEMI-RECESSED LED SPOTLIGHT



INTRODUCTION

FEATURE

Flip-down Modular Structure
Optimized Ceiling Gimbal Lighting
Low-glare Downlighting, UGR≤16
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIAL & FINISH

LED Brand: CITIZEN
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Radiator Housing
Optics: High Efficiency Clear PC lens

INSTALLATION

False Ceiling Recessed
Tilt Adjustable +65°, Horizontal Swivel 350°
Suitable for Interior Ceiling Light, like Lobby, Mall,.....

STANDARD


Designed and Manufactured to Comply with
CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
IP20 Protection, Class II Electric

OPTION

LED Color Temperature: CCT2700~6000K
Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

DIMENSION: [UNIT: MM]

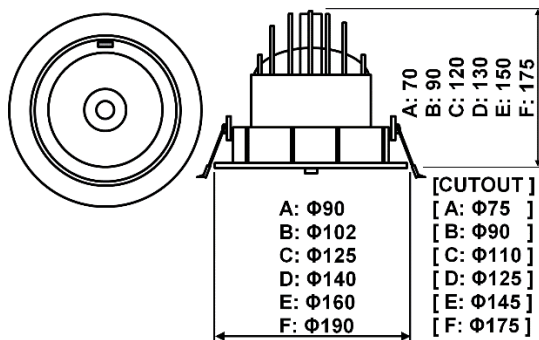

CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI 【RA】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR3106A-12W-WW30	12W	1204C4 CITIZEN	3000K	RA80	1190	>0.9	BLR: 15/24/38°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3106A-12W-NW40			4000K		1230				
GTR3106A-12W-PW50			5000K		1250				
GTR3106A-12W-WW30G			G3000K	1050					
GTR3106A-12W-NW40G			G4000K	1070					
GTR3106A-12W-WW30H			H3000K	900					
GTR3106A-12W-NW40H			H4000K	920					
GTR3106A-12W-TW			2C@12W	18TW	WW27 CW60				
GTR3106B-15W-WW30	15W	1204C4 CITIZEN	3000K	RA80	1390	>0.9			
GTR3106B-15W-NW40			4000K		1430				
GTR3106B-15W-PW50			5000K		1450				
GTR3106B-15W-WW30G			G3000K	1220					
GTR3106B-15W-NW40G			G4000K	1250					
GTR3106B-15W-WW30H			H3000K	1050					
GTR3106B-15W-NW40H			H4000K	1080					
GTR3106B-15W-TW			2C@15W	18TW	WW27 CW60				
GTR3106C-24W-WW30	24W	1206C4 CITIZEN	3000K	RA80	2350	>0.9			
GTR3106C-24W-NW40			4000K		2420				
GTR3106C-24W-PW50			5000K		2510				
GTR3106C-24W-WW30G			G3000K	2100					
GTR3106C-24W-NW40G			G4000K	2150					
GTR3106C-24W-WW30H			H3000K	1800					
GTR3106C-24W-NW40H			H4000K	1850					
GTR3106C-24W-TW			2C@24W	36TW	WW27 CW60				
GTR3106D-30W-WW30	30W	1206C4 CITIZEN	3000K	RA80	2820	>0.9			
GTR3106D-30W-NW40			4000K		2900				
GTR3106D-30W-PW50			5000K		2940				
GTR3106D-30W-WW30G			G3000K	2480					
GTR3106D-30W-NW40G			G4000K	2560					
GTR3106D-30W-WW30H			H3000K	2100					
GTR3106D-30W-NW40H			H4000K	2160					
GTR3106D-30W-TW			2C@30W	36TW	WW27 CW60				
GTR3106E-40W-WW30	40W	1208C4 CITIZEN	3000K	RA80	3760	>0.9			
GTR3106E-40W-NW40			4000K		3870				
GTR3106E-40W-PW50			5000K		3930				
GTR3106E-40W-WW30G			G3000K	3310					
GTR3106E-40W-NW40G			G4000K	3420					
GTR3106E-40W-WW30H			H3000K	2810					
GTR3106E-40W-NW40H			H4000K	2890					
GTR3106E-40W-TW			2C@40W	48TW	WW27 CW60				

INTRODUCTION

FEATURES

Easy Fast Installation and Maintenance Freely
Excellent Uniform Structure of LED Technology
Flip-down Modular Structure
Optimized Ceiling Gimbal Lighting
Color Rendering Index : Ra>80
Long Lifespan Design >50,000hours
Working Temperature: -20°C~40°C

MATERIALS & FINISH

LED Brand: CREE
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Radiator
Optics: Clear PMMA Lens
Power Wire: 30cm Length

INSTALLATION

Installation: False Ceiling Recessed
Tilt Adjustable +90°, Horizontal Swivel 350°
Suitable for Interior Ceiling Light, like Cabinet.....

STANDARDS


Designed and Manufactured to Comply with
TUV/CE/RoHS/CB/SAA/Erp/cETL/FCC
IP20 Protection, Class II Electric

OPTIONS


LED CCT: 1800K/2200K/2700K/3500K/6000K
Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

GIMBAL SEMI-RECESSED LED SPOTLIGHT



FRONTVIEW



BACKVIEW




FOLDING



CASE STUDY




DIMENSION: [UNIT: MM]

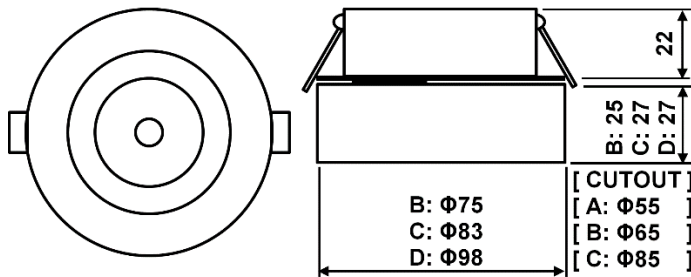

MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI 【RA】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR3107B-3W-WW30	3W	CXA1304 CREE COB	3000K	RA80	260	>0.4	BLR: 24°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3107B-3W-NW40			4000K		275				
GTR3107B-3W-PW50			5000K		275				
GTR3107B-3W-WW30H			H3000K	200					
GTR3107B-3W-NW40H			H4000K	225					
GTR3107B-5W-WW30	5W	CXA1304 CREE COB	3000K	RA80	430	>0.4			
GTR3107B-5W-NW40			4000K		470				
GTR3107B-5W-PW50			5000K		470				
GTR3107B-5W-WW30H			H3000K	325					
GTR3107B-5W-NW40H			H4000K	370					
GTR3107B-5W-TW	2C@5W	12TW	WW27 CW60	RA80	350	>0.8			
GTR3107C-8W-WW30	7W	CXA1507 CREE COB	3000K	RA80	620	>0.9			
GTR3107C-8W-NW40			4000K		660				
GTR3107C-8W-PW50			5000K		660				
GTR3107C-8W-WW30H			H3000K	470					
GTR3107C-8W-NW40H			H4000K	535					
GTR3107C-6W-TW	2C@6W	6TW	WW27 CW60	RA80	420	>0.8			
GTR3107C31-9W-RGB	3C&3W	3RGB	R G B	\	270	>0.5			
GTR3107C41-12W-RGBW	4C&3W	3RGBW	R G B W	\	360	>0.5			
GTR3107D-10W-WW30	10W	CXA1507 CREE COB	3000K	RA80	860	>0.9			
GTR3107D-10W-NW40			4000K		920				
GTR3107D-10W-PW50			5000K		920				
GTR3107D-10W-WW30H			H3000K	670					
GTR3107D-10W-NW40H			H4000K	745					
GTR3107D-10W-TW	2C@10W	18TW	WW27 CW60	RA80	700	>0.8			

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

GIMBAL SEMI-RECESSED LED SPOTLIGHT



BACKVIEW



INTRODUCTION

FEATURE

Flip-down Modular Structure
Optimized Ceiling Gimbal Lighting
Low-glare Downlighting, UGR≤19
Long Lifespan Design >50,000hours
Working Temperature: -20℃~40℃

MATERIAL & FINISH

LED Brand: CREE
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Radiator Housing
Optics: High Efficiency Clear PC lens

INSTALLATION

False Ceiling Recessed
Tilt Adjustable ±30°, Horizontal Swivel 350°
Suitable for Interior Ceiling Light, like Lobby, Mall.....

STANDARD


Designed and Manufactured to Comply with
CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
IP20 Protection, Class II Electric

OPTION


LED Color Temperature: CCT2700~6000K
Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

DIMENSION: [UNIT: MM]

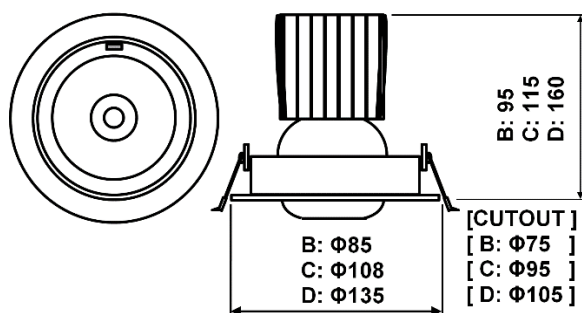


CASE STUDY

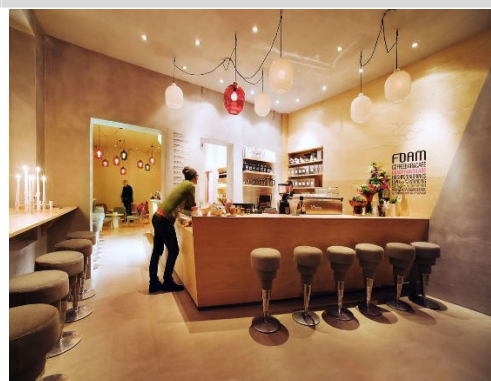

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI [RA]	LUMEN [LM]	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT [V]
GTR3108B-10W-WW30	10W	CXA1507 CREE COB	3000K	RA80	850	>0.9	BLR: 15/24/36°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3108B-10W-NW40			4000K		900				
GTR3108B-10W-PW50			5000K		900				
GTR3108B-10W-WW30H			H3000K	RA95	650				
GTR3108B-10W-NW40H			H4000K		740				
GTR3108B-10W-TW	2C@10W	12TW	WW27 CW60	RA80	750	>0.8			
GTR3108B-12W-WW30	12W	CXA1512 CREE COB	3000K	RA80	1030	>0.9			
GTR3108B-12W-NW40			4000K		1100				
GTR3108B-12W-PW50			5000K		1100				
GTR3108B-12W-WW30H			H3000K	RA95	790				
GTR3108B-12W-NW40H			H4000K		890				
GTR3108C-15W-WW30	15W	CXA1512 CREE COB	3000K	RA80	1200	>0.9			
GTR3108C-15W-NW40			4000K		1280				
GTR3108C-15W-PW50			5000K		1280				
GTR3108C-15W-WW30H			H3000K	RA95	920				
GTR3108C-15W-NW40H			H4000K		1040				
GTR3108C-15W-TW	2C@15W	18TW	WW27 CW60	RA80	1050	>0.9			
GTR3108C-20W-WW30	20W	CXA1820 CREE COB	3000K	RA80	1720	>0.9			
GTR3108C-20W-NW40			4000K		1840				
GTR3108C-20W-PW50			5000K		1840				
GTR3108C-20W-WW30H			H3000K	RA95	1310				
GTR3108C-20W-NW40H			H4000K		1490				
GTR3108C-20W-TW	2C@20W	36TW	WW27 CW60	RA80	1400	>0.8			
GTR3108D-24W-WW30	24W	CXA1820 CREE COB	3000K	RA80	2070	>0.9			
GTR3108D-24W-NW40			4000K		2200				
GTR3108D-24W-PW50			5000K		2200				
GTR3108D-24W-WW30H			H3000K	RA95	1575				
GTR3108D-24W-NW40H			H4000K		1785				
GTR3108D-24W-TW	2C@24W	36TW	WW27 CW60	RA80	1680	>0.8			
GTR3108D-30W-WW30	30W	CXA1830 CREE COB	3000K	RA80	2580	>0.9			
GTR3108D-30W-NW40			4000K		2760				
GTR3108D-30W-PW50			5000K		2760				
GTR3108D-30W-WW30H			H3000K	RA95	1970				
GTR3108D-30W-NW40H			H4000K		2230				
GTR3108D-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	>0.8			



GIMBAL RECESSED LED SPOTLIGHT



(GTR3301)

BACKVIEW



(GTR3302)

(GTR3303)

(GTR3304)



[BAFFLE] MATT SAND FINISH

[B01]

[B02]

[B03]

[BAFFLE] CHROME FINISH

[B52]

[B53]

[B55]



WHITE

[H01]

BLACK

[H02]

SILVER

[H03]






BROWN

[H06]

CASE STUDY



DIMENSION: [UNIT: MM]





[CUTOUT]
[GTR3301B:Φ100]
[GTR3301C:Φ125]
[GTR3301D:Φ150]

[CUTOUT]
[GTR3302B:S100]
[GTR3302C:S125]
[GTR3302D:S150]

[CUTOUT]
[GTR3303B:215x100]
[GTR3303C:263x125]
[GTR3303D:315x150]

[CUTOUT]
[GTR3304B:335x100]
[GTR3304C:400x125]
[GTR3304D:480x150]



MODEL	POWER	LED TYPE	CCT	CRI	LUMEN	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT
GTR3301B-10W-WW30	10W	1204C4 CITIZEN	3000K	RA80	1195	> 0.9	BLR: 12/24/38°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3301B-10W-NW40			4000K		1230				
GTR3301B-10W-WW30G			G3000K		1050				
GTR3301B-10W-TW	2C@10W	18TW	WW27 CW60	RA80	700	> 0.8			
GTR3301C-20W-WW30	20W	1206C4 CITIZEN	3000K	RA80	1960	> 0.9			
GTR3301C-20W-NW40			4000K		2020				
GTR3301C-20W-WW30G			G3000K		RA90				
GTR3301C-20W-TW	2C@20W	24TW	WW27 CW60	RA80	1400	> 0.9			
GTR3301D-30W-WW30	30W	1206C4 CITIZEN	3000K	RA80	2820	> 0.9			
GTR3301D-30W-NW40			4000K		2900				
GTR3301D-30W-WW30G			G3000K		RA90				
GTR3301D-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	> 0.8			
GTR3302B-10W-WW30	10W	1204C4 CITIZEN	3000K	RA80	1195	> 0.9			
GTR3302B-10W-NW40			4000K		1230				
GTR3302B-10W-WW30G			G3000K		RA90				
GTR3302B-10W-TW	2C@10W	18TW	WW27 CW60	RA80	700	> 0.8			
GTR3302C-20W-WW30	20W	1206C4 CITIZEN	3000K	RA80	1960	> 0.9			
GTR3302C-20W-NW40			4000K		2020				
GTR3302C-20W-WW30G			G3000K		RA90				
GTR3302C-20W-TW	2C@20W	24TW	WW27 CW60	RA80	1400	> 0.9			
GTR3302D-30W-WW30	30W	1206C4 CITIZEN	3000K	RA80	2820	> 0.9			
GTR3302D-30W-NW40			4000K		2900				
GTR3302D-30W-WW30G			G3000K		RA90				
GTR3302D-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	> 0.8			
GTR3303B-20W-WW30	2x10W	2x1204C4 CITIZEN	3000K	RA80	2x1195	> 0.9			
GTR3303B-20W-NW40			4000K		2x1230				
GTR3303B-20W-WW30G			G3000K		RA90				
GTR3303B-20W-TW	2x2C@10W	2x18TW	WW27 CW60	RA80	2x700	> 0.8			
GTR3303C-40W-WW30	2x20W	2x1206C4 CITIZEN	3000K	RA80	2x1960	> 0.9			
GTR3303C-40W-NW40			4000K		2x2020				
GTR3303C-40W-WW30G			G3000K		RA90				
GTR3303C-40W-TW	2C@20W	2x24TW	WW27 CW60	RA80	2x1400	> 0.9			
GTR3303D-60W-WW30	2x30W	2x1206C4 CITIZEN	3000K	RA80	2x2820	> 0.9			
GTR3303D-60W-NW40			4000K		2x2900				
GTR3303D-60W-WW30G			G3000K		RA90				
GTR3303D-60W-TW	2x2C@30W	2x36TW	WW27 CW60	RA80	2x2100	> 0.8			
GTR3304B-30W-WW30	3x10W	3x1204C4 CITIZEN	3000K	RA80	3x1195	> 0.9			
GTR3304B-30W-NW40			4000K		3x1230				
GTR3304B-30W-WW30G			G3000K		RA90				
GTR3304B-30W-TW	3x2C@10W	3x18TW	WW27 CW60	RA80	3x700	> 0.8			
GTR3304C-60W-WW30	3x20W	3x1206C4 CITIZEN	3000K	RA80	3x1960	> 0.9			
GTR3304C-60W-NW40			4000K		3x2020				
GTR3304C-60W-WW30G			G3000K		RA90				
GTR3304C-60W-TW	2C@20W	3x24TW	WW27 CW60	RA80	3x1400	> 0.9			
GTR3304D-90W-WW30	3x30W	3x1206C4 CITIZEN	3000K	RA80	3x2820	> 0.9			
GTR3304D-90W-NW40			4000K		3x2900				
GTR3304D-90W-WW30G			G3000K		RA90				
GTR3304D-90W-TW	3x2C@30W	3x36TW	WW27 CW60	RA80	3x2100	> 0.8			

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

FEATURE

- Flip-down Modular Structure
- Optimized Ceiling Gimbal Lighting
- Low-glare Downlighting, UGR≤23
- Long Lifespan Design>50,000hours
- Working Temperature: -20°C~40°C

MATERIAL & FINISH

- LED Brand: CITIZEN
- Remote Flicker-free Driver Brand: GUBO
- Housing: Die-casted Aluminum Radiator Housing
- Optics: High Efficiency Clear PC lens

INSTALLATION

- False Ceiling Recessed
- Tilt Adjustable +65°, Horizontal Swivel 350°
- Suitable for Interior Ceiling Light, like Lobby, Mall.....

STANDARD


- Designed and Manufactured to Comply with CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
- IP20 Protection, Class II Electric

OPTION


- LED Color Temperature: CCT2700~6000K
- Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]


GIMBAL SEMI-RECESSED LED SPOTLIGHT

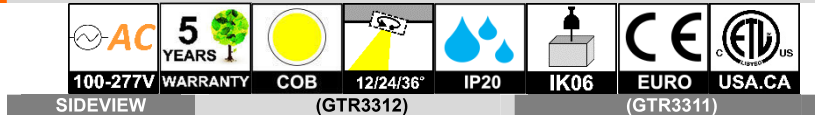

CASE STUDY

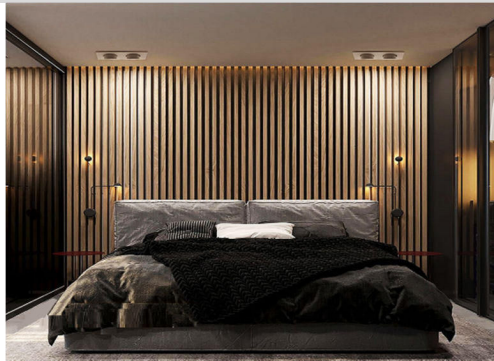


DIMENSION: [UNIT: MM]

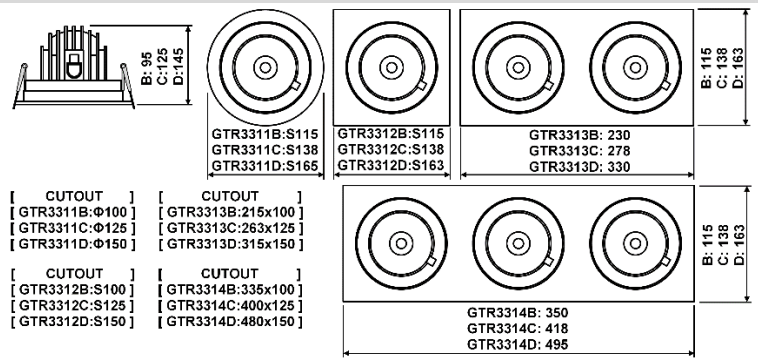

MODEL	POWER	LED TYPE	CCT	CRI	LUMEN	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT
GTR3311B-10W-WW30	10W	1204C4 CITIZEN	3000K	RA80	1195	>0.9	BLR: 12/24/38°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3311B-10W-NW40			4000K		1230				
GTR3311B-10W-WW30G			G3000K		1050				
GTR3311B-10W-TW	2C@10W	18TW	WW27 CW60	RA80	700	>0.8			
GTR3311C-20W-WW30	20W	1206C4 CITIZEN	3000K	RA80	1960	>0.9			
GTR3311C-20W-NW40			4000K		2020				
GTR3311C-20W-WW30G			G3000K		RA90				
GTR3311C-20W-TW	2C@20W	24TW	WW27 CW60	RA80	1400	>0.9			
GTR3311D-30W-WW30	30W	1206C4 CITIZEN	3000K	RA80	2820	>0.9			
GTR3311D-30W-NW40			4000K		2900				
GTR3311D-30W-WW30G			G3000K		RA90				
GTR3311D-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	>0.8			
GTR3312B-10W-WW30	10W	1204C4 CITIZEN	3000K	RA80	1195	>0.9			
GTR3312B-10W-NW40			4000K		1230				
GTR3312B-10W-WW30G			G3000K		RA90				
GTR3312B-10W-TW	2C@10W	18TW	WW27 CW60	RA80	700	>0.8			
GTR3312C-20W-WW30	20W	1206C4 CITIZEN	3000K	RA80	1960	>0.9			
GTR3312C-20W-NW40			4000K		2020				
GTR3312C-20W-WW30G			G3000K		RA90				
GTR3312C-20W-TW	2C@20W	24TW	WW27 CW60	RA80	1400	>0.9			
GTR3312D-30W-WW30	30W	1206C4 CITIZEN	3000K	RA80	2820	>0.9			
GTR3312D-30W-NW40			4000K		2900				
GTR3312D-30W-WW30G			G3000K		RA90				
GTR3312D-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	>0.8			
GTR3313B-40W-WW30	2x10W	2x1204C4 CITIZEN	3000K	RA80	2x1195	>0.9			
GTR3313B-40W-NW40			4000K		2x1230				
GTR3313B-40W-WW30G			G3000K		RA90				
GTR3313B-40W-TW	2x2C@10W	2x18TW	WW27 CW60	RA80	2x700	>0.8			
GTR3313C-40W-WW30	2x20W	2x1206C4 CITIZEN	3000K	RA80	2x1960	>0.9			
GTR3313C-40W-NW40			4000K		2x2020				
GTR3313C-40W-WW30G			G3000K		RA90				
GTR3313C-40W-TW	2C@20W	2x24TW	WW27 CW60	RA80	2x1400	>0.9			
GTR3313D-60W-WW30	2x30W	2x1206C4 CITIZEN	3000K	RA80	2x2820	>0.9			
GTR3313D-60W-NW40			4000K		2x2900				
GTR3313D-60W-WW30G			G3000K		RA90				
GTR3313D-60W-TW	2x2C@30W	2x36TW	WW27 CW60	RA80	2x2100	>0.8			
GTR3314B-30W-WW30	3x10W	3x1204C4 CITIZEN	3000K	RA80	3x1195	>0.9			
GTR3314B-30W-NW40			4000K		3x1230				
GTR3314B-30W-WW30G			G3000K		RA90				
GTR3314B-30W-TW	3x2C@10W	3x18TW	WW27 CW60	RA80	3x700	>0.8			
GTR3314C-60W-WW30	3x20W	3x1206C4 CITIZEN	3000K	RA80	3x1960	>0.9			
GTR3314C-60W-NW40			4000K		3x2020				
GTR3314C-60W-WW30G			G3000K		RA90				
GTR3314C-60W-TW	2C@20W	3x24TW	WW27 CW60	RA80	3x1400	>0.9			
GTR3314D-90W-WW30	3x30W	3x1206C4 CITIZEN	3000K	RA80	3x2820	>0.9			
GTR3314D-90W-NW40			4000K		3x2900				
GTR3314D-90W-WW30G			G3000K		RA90				
GTR3314D-90W-TW	3x2C@30W	3x36TW	WW27 CW60	RA80	3x2100	>0.8			

GIMBAL RECESSED LED SPOTLIGHT





(GTR3323)



(GTR3324)



DIMENSION: [UNIT: MM]

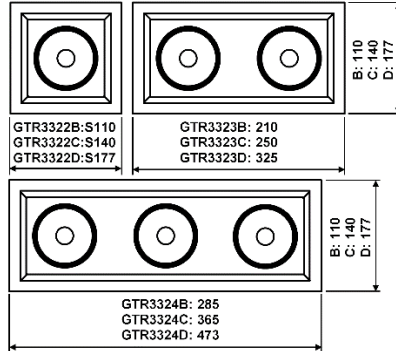

INTRODUCTION

FEATURE

- Flip-down Modular Structure
- Optimized Ceiling Gimbal Lighting
- Low-glare Downlighting, UGR≤19
- Long Lifespan Design>50,000hours
- Working Temperature: -20°C~40°C

MATERIAL & FINISH

- LED Brand: CREE
- Remote Flicker-free Driver Brand: GUBO
- Housing: Die-casted Aluminum Radiator Housing
- Optics: High Efficiency Clear PC lens

INSTALLATION

- False Ceiling Recessed
- Tilt Adjustable +65°, Horizontal Swivel 350°
- Suitable for Interior Ceiling Light, like Lobby, Mall.....

STANDARD

- Designed and Manufactured to Comply with CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
- IP20 Protection, Class II Electric

OPTION

- LED Color Temperature: CCT2700~6000K
- Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

CASE STUDY



MODEL	POWER	LED TYPE	CCT	CRI	LUMEN	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT
GTR3322B-12W-WWW30	12W	CXA1512	3000K	RA80	990	>0.9	BLR: 15/24/38°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3322B-12W-NW40	12W	CREE COB	4000K	RA95	1060	>0.9			
GTR3322B-12W-WWW30H	12W	CREE COB	H3000K	RA95	760	>0.9			
GTR3322B-12W-TW	2C@12W	18TW	WW27 CW60	RA80	840	>0.8			
GTR3322B-15W-WWW30	15W	CXA1512	3000K	RA80	1160	>0.9			
GTR3322B-15W-NW40	15W	CREE COB	4000K	RA95	1240	>0.9			
GTR3322B-15W-WWW30H	15W	CREE COB	H3000K	RA95	880	>0.9			
GTR3322B-15W-TW	2C@15W	18TW	WW27 CW60	RA80	1050	>0.8			
GTR3322C-20W-WWW30	20W	CXA1816	3000K	RA80	1650	>0.9			
GTR3322C-20W-NW40	20W	CREE COB	4000K	RA95	1770	>0.9			
GTR3322C-20W-WWW30H	20W	CREE COB	H3000K	RA95	1260	>0.9			
GTR3322C-20W-TW	2C@20W	24TW	WW27 CW60	RA80	1400	>0.9			
GTR3322D-30W-WWW30	30W	CXA1830	3000K	RA80	2480	>0.9			
GTR3322D-30W-NW40	30W	CREE COB	4000K	RA95	2650	>0.9			
GTR3322D-30W-WWW30H	30W	CREE COB	H3000K	RA95	1890	>0.9			
GTR3322D-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	>0.8			
GTR3323B-24W-WWW30	2x12W	2xCXA1512	3000K	RA80	2x990	>0.9			
GTR3323B-24W-NW40	2x12W	CREE COB	4000K	RA95	2x1060	>0.9			
GTR3323B-24W-WWW30H	2x12W	CREE COB	H3000K	RA95	2x760	>0.9			
GTR3323B-24W-TW	2x2C@12W	2x18TW	WW27 CW60	RA80	2x840	>0.8			
GTR3323B-30W-WWW30	2x15W	2xCXA1512	3000K	RA80	2x1160	>0.9			
GTR3323B-30W-NW40	2x15W	CREE COB	4000K	RA95	2x1240	>0.9			
GTR3323B-30W-WWW30H	2x15W	CREE COB	H3000K	RA95	2x880	>0.9			
GTR3323B-30W-TW	2x2C@15W	2x18TW	WW27 CW60	RA80	2x1050	>0.8			
GTR3323C-40W-WWW30	2x20W	2xCXA1816	3000K	RA80	2x1650	>0.9			
GTR3323C-40W-NW40	2x20W	CREE COB	4000K	RA95	2x1770	>0.9			
GTR3323C-40W-WWW30H	2x20W	CREE COB	H3000K	RA95	2x1260	>0.9			
GTR3323C-40W-TW	2C@20W	2x24TW	WW27 CW60	RA80	2x1400	>0.9			
GTR3323D-60W-WWW30	2x30W	2xCXA1830	3000K	RA80	2x2480	>0.9			
GTR3323D-60W-NW40	2x30W	CREE COB	4000K	RA95	2x2650	>0.9			
GTR3323D-60W-WWW30H	2x30W	CREE COB	H3000K	RA95	2x1890	>0.9			
GTR3323D-60W-TW	2x2C@30W	2x36TW	WW27 CW60	RA80	2x2100	>0.8			
GTR3324B-36W-WWW30	3x12W	3xCXA1512	3000K	RA80	3x990	>0.9			
GTR3324B-36W-NW40	3x12W	CREE COB	4000K	RA95	3x1060	>0.9			
GTR3324B-36W-WWW30H	3x12W	CREE COB	H3000K	RA95	3x760	>0.9			
GTR3324B-36W-TW	3x2C@12W	3x18TW	WW27 CW60	RA80	3x840	>0.8			
GTR3324B-45W-WWW30	3x15W	3xCXA1512	3000K	RA80	3x1160	>0.9			
GTR3324B-45W-NW40	3x15W	CREE COB	4000K	RA95	3x1240	>0.9			
GTR3324B-45W-WWW30H	3x15W	CREE COB	H3000K	RA95	3x880	>0.9			
GTR3324B-45W-TW	3x2C@15W	3x18TW	WW27 CW60	RA80	3x1050	>0.8			
GTR3324C-60W-WWW30	3x20W	3xCXA1816	3000K	RA80	3x1650	>0.9			
GTR3324C-60W-NW40	3x20W	CREE COB	4000K	RA95	3x1770	>0.9			
GTR3324C-60W-WWW30H	3x20W	CREE COB	H3000K	RA95	3x1260	>0.9			
GTR3324C-60W-TW	3x2C@20W	3x24TW	WW27 CW60	RA80	3x1400	>0.9			
GTR3324D-90W-WWW30	3x30W	3xCXA1830	3000K	RA80	3x2480	>0.9			
GTR3324D-90W-NW40	3x30W	CREE COB	4000K	RA95	3x2650	>0.9			
GTR3324D-90W-WWW30H	3x30W	CREE COB	H3000K	RA95	3x1890	>0.9			
GTR3324D-90W-TW	3x2C@30W	3x36TW	WW27 CW60	RA80	3x2100	>0.8			

INTRODUCTION

FEATURE

- Flip-down Modular Structure
- Optimized Ceiling Gimbal Lighting
- Low-glare Downlighting, UGR≤16
- Long Lifespan Design>50,000hours
- Working Temperature: -20°C~40°C

MATERIAL & FINISH

- LED Brand: CREE
- Remote Flicker-free Driver Brand: GUBO
- Housing: Die-casted Aluminum Radiator Housing
- Optics: High Efficiency Clear PC lens

INSTALLATION

- False Ceiling Recessed
- Tilt Adjustable +35°, Horizontal Swivel 350°
- Suitable for Interior Ceiling Light, like Lobby, Mall.....

STANDARD


- Designed and Manufactured to Comply with CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
- IP20 Protection, Class II Electric

OPTION


- LED Color Temperature: CCT2700~6000K
- Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

GIMBAL SEMI-RECESSED LED SPOTLIGHT

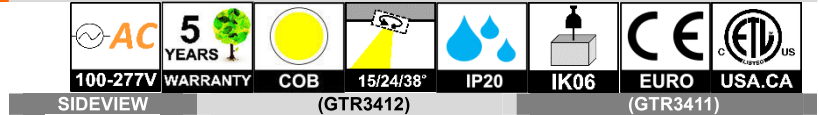


CASE STUDY

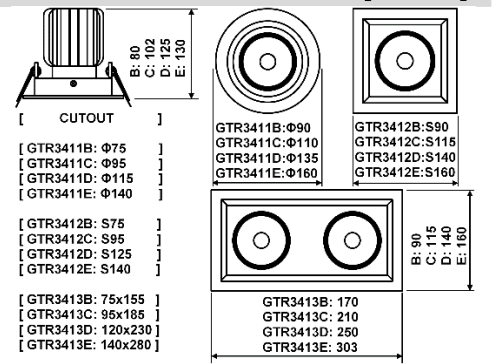

MODEL	POWER	LED TYPE	CCT	CRI	LUMEN	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT
GTR3411B-12W-WW30	12W	CXA1512 CREE COB	3000K	RA80	990	>0.9	BLR: 15/24/38°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3411B-12W-NW40			4000K		1060				
GTR3411B-12W-WW30H			H3000K		760				
GTR3411B-12W-TW	2C@12W	18TW	WW27 CW60	RA80	840	>0.8			
GTR3411C-15W-WW30	15W	CXA1512 CREE COB	3000K	RA80	1160	>0.9			
GTR3411C-15W-NW40			4000K		1240				
GTR3411C-15W-WW30H			H3000K		RA95	880			
GTR3411C-15W-TW	2C@15W	18TW	WW27 CW60	RA80	1050	>0.8			
GTR3411D-24W-WW30	24W	CXA1820 CREE COB	3000K	RA80	1980	>0.9			
GTR3411D-24W-NW40			4000K		2120				
GTR3411D-24W-WW30H			H3000K		RA95	1520			
GTR3411D-24W-TW	2C@24W	36TW	WW27 CW60	RA80	1680	>0.9			
GTR3411E-30W-WW30	30W	CXA1830 CREE COB	3000K	RA80	2480	>0.9			
GTR3411E-30W-NW40			4000K		2650				
GTR3411E-30W-WW30H			H3000K		RA95	1890			
GTR3411E-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	>0.8			
GTR3412B-12W-WW30	12W	CXA1512 CREE COB	3000K	RA80	990	>0.9			
GTR3412B-12W-NW40			4000K		1060				
GTR3412B-12W-WW30H			H3000K		RA95	760			
GTR3412B-12W-TW	2C@12W	18TW	WW27 CW60	RA80	840	>0.8			
GTR3412C-15W-WW30	15W	CXA1512 CREE COB	3000K	RA80	1160	>0.9			
GTR3412C-15W-NW40			4000K		1240				
GTR3412C-15W-WW30H			H3000K		RA95	880			
GTR3412C-15W-TW	2C@15W	18TW	WW27 CW60	RA80	1050	>0.8			
GTR3412D-24W-WW30	24W	CXA1820 CREE COB	3000K	RA80	1980	>0.9			
GTR3412D-24W-NW40			4000K		2120				
GTR3412D-24W-WW30H			H3000K		RA95	1520			
GTR3412D-24W-TW	2C@24W	36TW	WW27 CW60	RA80	1680	>0.9			
GTR3412E-30W-WW30	30W	CXA1830 CREE COB	3000K	RA80	2480	>0.9			
GTR3412E-30W-NW40			4000K		2650				
GTR3412E-30W-WW30H			H3000K		RA95	1890			
GTR3412E-30W-TW	2C@30W	36TW	WW27 CW60	RA80	2100	>0.8			
GTR3413B-24W-WW30	2x12W	2xCXA1512 CREE COB	3000K	RA80	2x990	>0.9			
GTR3413B-24W-NW40			4000K		2x1060				
GTR3413B-24W-WW30H			H3000K		RA95	2x760			
GTR3413B-24W-TW	2x2C@12W	2x18TW	WW27 CW60	RA80	2x840	>0.8			
GTR3413C-30W-WW30	2x15W	2xCXA1512 CREE COB	3000K	RA80	2x1160	>0.9			
GTR3413C-30W-NW40			4000K		2x1240				
GTR3413C-30W-WW30H			H3000K		RA95	2x880			
GTR3413C-30W-TW	2x2C@15W	2x18TW	WW27 CW60	RA80	2x1050	>0.8			
GTR3413D-48W-WW30	2x24W	2xCXA1816 CREE COB	3000K	RA80	2x1980	>0.9			
GTR3413D-48W-NW40			4000K		2x2120				
GTR3413D-48W-WW30H			H3000K		RA95	2x1520			
GTR3413D-48W-TW	2C@24W	2x24TW	WW27 CW60	RA80	2x1680	>0.9			
GTR3413E-60W-WW30	2x30W	2xCXA1830 CREE COB	3000K	RA80	2x2480	>0.9			
GTR3413E-60W-NW40			4000K		2x2650				
GTR3413E-60W-WW30H			H3000K		RA95	2x1890			
GTR3413E-60W-TW	2x2C@30W	2x36TW	WW27 CW60	RA80	2x2100	>0.8			



GIMBAL RECESSED LED SPOTLIGHT



(GTR3421)

(GTR3422)




(GTR3423)

(GTR3424)



DIMENSION: [UNIT: MM]

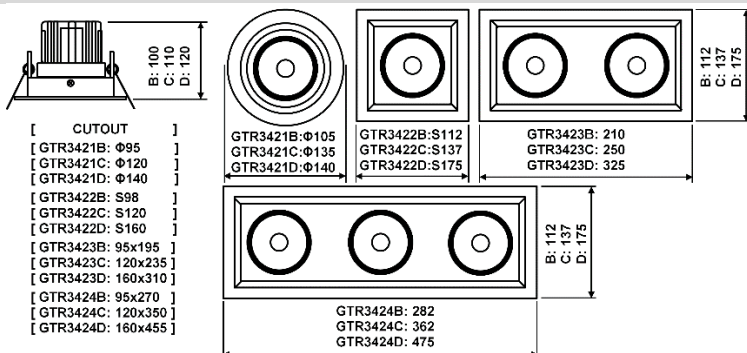

INTRODUCTION

FEATURE

- Flip-down Modular Structure
- Optimized Ceiling Gimbal Lighting
- Low-glare Downlighting, UGR≤16
- Long Lifespan Design>50,000hours
- Working Temperature: -20°C~40°C

MATERIAL & FINISH

- LED Brand: CREE
- Remote Flicker-free Driver Brand: GUBO
- Housing: Die-casted Aluminum Radiator Housing
- Optics: High Efficiency Clear PC lens

INSTALLATION

- False Ceiling Recessed
- Tilt Adjustable +45°, Horizontal Swivel 350°
- Suitable for Interior Ceiling Light, like Lobby, Mall,.....

STANDARD

- Designed and Manufactured to Comply with CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
- IP20 Protection, Class II Electric

OPTION

- LED Color Temperature: CCT2700~6000K
- Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]

CASE STUDY



MODEL	POWER	LED TYPE	CCT	CRI	LUMEN	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT
GTR3421B-10W-WVW30	10W	CXA1512 CREE COB	3000K	RA80	830	>0.9	BLR: 12/24/36°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR3421B-10W-NW40			4000K		880				
GTR3421B-10W-WVW30H			H3000K		630				
GTR3421B-10W-TW	2C@10W	18TW	WW27 CW60	RA80	840	>0.8			
GTR3421C-15W-WVW30	15W	CXA1512 CREE COB	3000K	RA80	1160	>0.9			
GTR3421C-15W-NW40			4000K		1240				
GTR3421C-15W-WVW30H			H3000K		RA95				
GTR3421C-15W-TW	2C@15W	18TW	WW27 CW60	RA80	1050	>0.8			
GTR3421D-24W-WVW30	24W	CXA1820 CREE COB	3000K	RA80	1980	>0.9			
GTR3421D-24W-NW40			4000K		2120				
GTR3421D-24W-WVW30H			H3000K		RA95				
GTR3421D-24W-TW	2C@24W	36TW	WW27 CW60	RA80	1680	>0.8			
GTR3422B-10W-WVW30	10W	CXA1512 CREE COB	3000K	RA80	830	>0.9			
GTR3422B-10W-NW40			4000K		880				
GTR3422B-10W-WVW30H			H3000K		RA95				
GTR3422B-10W-TW	2C@10W	18TW	WW27 CW60	RA80	840	>0.8			
GTR3422C-15W-WVW30	15W	CXA1512 CREE COB	3000K	RA80	1160	>0.9			
GTR3422C-15W-NW40			4000K		1240				
GTR3422C-15W-WVW30H			H3000K		RA95				
GTR3422C-15W-TW	2C@15W	18TW	WW27 CW60	RA80	1050	>0.8			
GTR3422D-24W-WVW30	24W	CXA1820 CREE COB	3000K	RA80	1980	>0.9			
GTR3422D-24W-NW40			4000K		2120				
GTR3422D-24W-WVW30H			H3000K		RA95				
GTR3422D-24W-TW	2C@24W	36TW	WW27 CW60	RA80	1680	>0.9			
GTR3423B-20W-WVW30	2x10W	2xCXA1512 CREE COB	3000K	RA80	2x830	>0.9			
GTR3423B-20W-NW40			4000K		2x880				
GTR3423B-20W-WVW30H			H3000K		RA95				
GTR3423B-20W-TW	2x2C@10W	2x18TW	WW27 CW60	RA80	2x840	>0.8			
GTR3423C-30W-WVW30	2x15W	2xCXA1512 CREE COB	3000K	RA80	2x1160	>0.9			
GTR3423C-30W-NW40			4000K		2x1240				
GTR3423C-30W-WVW30H			H3000K		RA95				
GTR3423C-30W-TW	2x2C@15W	2x18TW	WW27 CW60	RA80	2x1050	>0.8			
GTR3423D-48W-WVW30	2x24W	2xCXA1816 CREE COB	3000K	RA80	2x1980	>0.9			
GTR3423D-48W-NW40			4000K		2x2120				
GTR3423D-48W-WVW30H			H3000K		RA95				
GTR3423D-48W-TW	2C@24W	2x24TW	WW27 CW60	RA80	2x1680	>0.9			
GTR3424B-30WW-WVW30	3x10W	3xCXA1512 CREE COB	3000K	RA80	3x830	>0.9			
GTR3424B-30WW-NW40			4000K		3x880				
GTR3424B-30WW-WVW30H			H3000K		RA95				
GTR3424B-30WW-TW	3x2C@10W	3x18TW	WW27 CW60	RA80	3x840	>0.8			
GTR3424C-45W-WVW30	3x15W	3xCXA1512 CREE COB	3000K	RA80	3x1160	>0.9			
GTR3424C-45W-NW40			4000K		3x1240				
GTR3424C-45W-WVW30H			H3000K		RA95				
GTR3424C-45W-TW	3x2C@15W	3x18TW	WW27 CW60	RA80	3x1050	>0.8			
GTR3424D-72W-WVW30	3x24W	3xCXA1820 CREE COB	3000K	RA80	3x1980	>0.9			
GTR3424D-72W-NW40			4000K		3x2120				
GTR3424D-72W-WVW30H			H3000K		RA95				
GTR3424D-72W-TW	3x2C@24W	3x24TW	WW27 CW60	RA80	3x1680	>0.9			

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

FEATURE

- Flip-down Modular Structure
- Optimized Ceiling Gimbal Lighting
- Low-glare Downlighting, UGR≤19
- Long Lifespan Design>50,000hours
- Working Temperature: -20°C~40°C

MATERIAL & FINISH

- LED Brand: CREE
- Remote Flicker-free Driver Brand: GUBO
- Housing: Die-casted Aluminum Radiator Housing
- Optics: High Efficiency Clear PC lens

INSTALLATION

- False Ceiling Recessed
- Tilt Adjustable +90°, Horizontal Swivel 350°
- Suitable for Interior Ceiling Light, like Lobby, Mall.....

STANDARD

- Designed and Manufactured to Comply with CE/RoHS/EMF/TUV/CB/SAA/Erp/cUL/FCC
- IP20 Protection, Class II Electric

OPTION

- LED Color Temperature: CCT2700~6000K
- Custom Housing Color Finish: (Any Color in RAL)

WHITE [H01]	BLACK [H02]	SILVER [H03]	BROWN [H06]


GIMBAL SEMI-RECESSED LED SPOTLIGHT



CASE STUDY



DIMENSION: [UNIT: MM]

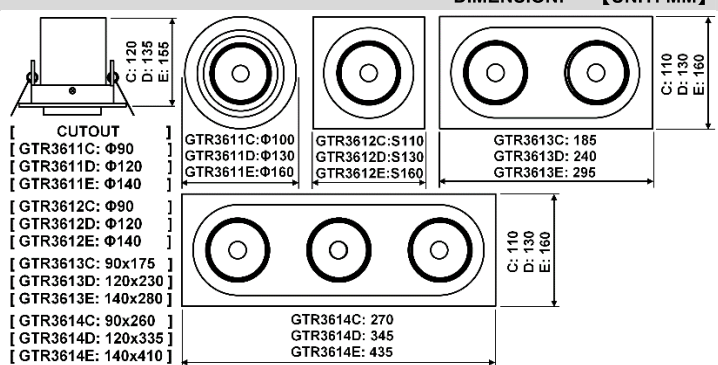

MODEL	POWER	LED TYPE	CCT	CRI	LUMEN	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT			
GTR3611C-12W-WW30	12W	CXA1512 CREE COB	3000K	RA80	990	>0.9	BLR: 15/24/38°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]			
GTR3611C-12W-NW40			4000K		1060							
GTR3611C-12W-WW30H			H3000K		760							
GTR3611C-12W-TW	2C@12W	18TW	WW27 CW60	RA80	840	>0.8						
GTR3611D-20W-WW30			3000K		1650							
GTR3611D-20W-NW40			4000K		1770							
GTR3611D-30W-WW30H	2D@20W	24TW	H3000K	RA95	1260	>0.9						
GTR3611D-20W-TW			WW27 CW60		1400							
GTR3611E-30W-WW30			3000K		2480							
GTR3611E-30W-NW40	30W	CXA1830 CREE COB	4000K	RA80	2650	>0.9						
GTR3611E-30W-WW30H			H3000K		1890							
GTR3611E-30W-TW			WW27 CW60		2100							
GTR3612C-12W-WW30	12W	CXA1512 CREE COB	3000K	RA80	990	>0.9						
GTR3612C-12W-NW40			4000K		1060							
GTR3612C-12W-WW30H			H3000K		760							
GTR3612C-12W-TW	2C@12W	18TW	WW27 CW60	RA80	840	>0.8						
GTR3612D-20W-WW30			3000K		1650							
GTR3612D-20W-NW40			4000K		1770							
GTR3612D-30W-WW30H	2D@20W	24TW	H3000K	RA95	1260	>0.9						
GTR3612D-20W-TW			WW27 CW60		1400							
GTR3612E-30W-WW30			3000K		2480							
GTR3612E-30W-NW40	30W	CXA1830 CREE COB	4000K	RA80	2650	>0.9						
GTR3612E-30W-WW30H			H3000K		1890							
GTR3612E-30W-TW			WW27 CW60		2100							
GTR3613C-24W-WW30	2x12W	2xCXA1512 CREE COB	3000K	RA80	2x990	>0.9						
GTR3613C-24W-NW40			4000K		2x1060							
GTR3613C-24W-WW30H			H3000K		2x760							
GTR3613C-24W-TW	2x2C@12W	2x18TW	WW27 CW60	RA80	2x840	>0.8						
GTR3613D-40W-WW30			3000K		2x1650							
GTR3613D-40W-NW40			4000K		2x1770							
GTR3613D-40W-WW30H	2x20W	2xCXA1816 CREE COB	H3000K	RA95	2x1260	>0.9						
GTR3613D-40W-TW			WW27 CW60		2x1400							
GTR3613E-60W-WW30			3000K		2x2480							
GTR3613E-60W-NW40	2x30W	2xCXA1830 CREE COB	4000K	RA80	2x2650	>0.9						
GTR3613E-60W-WW30H			H3000K		2x1890							
GTR3613E-60W-TW			WW27 CW60		2x2100							
GTR3614C-36W-WW30	3x12W	3xCXA1512 CREE COB	3000K	RA80	3x990	>0.9						
GTR3614C-36W-NW40			4000K		3x1060							
GTR3614C-36W-WW30H			H3000K		3x760							
GTR3614C-36W-TW	3x2C@12W	3x18TW	WW27 CW60	RA80	3x840	>0.8						
GTR3614D-60W-WW30			3000K		3x1650							
GTR3614D-60W-NW40			4000K		3x1770							
GTR3614D-60W-WW30H	3x20W	3xCXA1816 CREE COB	H3000K	RA95	3x1260	>0.9						
GTR3614D-60W-TW			WW27 CW60		3x1400							
GTR3614E-90w-WW30			3000K		3x2480							
GTR3614E-90w-NW40	3x30W	3xCXA1830 CREE COB	4000K	RA80	3x2650	>0.9						
GTR3614E-90w-WW30H			H3000K		3x1890							
GTR3614E-90w-TW			WW27 CW60		3x2100							