

FEATURES

Mercury Free, No UV No Radiation
Advanced LED Technology
Simple Modern Design
Color Rendering Index >80
Long Lifespan >50,000hours

MATERIALS & FINISH

LED Branding: CREE&PHILIPS
Driver Branding: GTE
Die-casted Aluminum Housing
Transparent Glass Diffuser

INSTALLATION

Surface Mounted
Suitable for Garden, Park, Plaza.....

STANDARDS



Designed and Manufactured to Comply with
CE/RoHS/TUV/CB/cUL/SAA Standard
IP65 Protection, Class I Electric

OPTION



LED Color Temperature: CCT2700~6000K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
Dimming Type: 1-10V, TRIAC, DALI, RF, ZIGBEE, WIFI

Housing Color Finish:

GREY **BLACK** **DARK GREY** **BROWN**
【HGR】 **【HBK】** **【HGRD】** **【HBR】**

**【A】****【A】**
WALL SCONE:**【D】**
BOLLARD:**【D-L30】****【D-L80】**

DIMENSION: 【UNIT: MM】

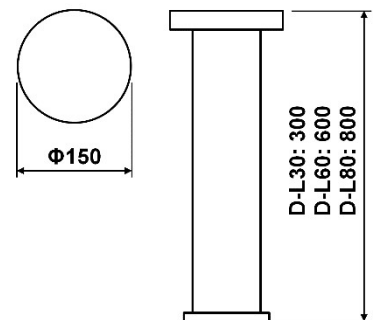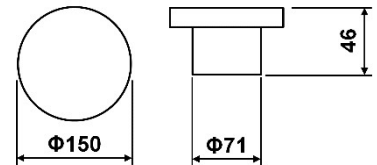

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTG5131A-10W-WW	10W	24x1.5W SMD3030	3000K	800	>0.9	BRR: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&PWM ZIGBEE	AC100~277V [DC24V]
GTG5131A-10W-NW			4000K	830				
GTG5131A-10W-CW			6000K	850				
GTG5131A22-12W-CW	2C@12W	12CW	WW	CW	600			DC24V
GTG5131A32-12W-RGB	3C@12W	12RGB	R	G	B	360		
GTG5131A42-12W-RGBW	4C@12W	12RGBW	R	G	B	W	480	
GTG5131D-10W-WW	10W	24x1.5W SMD3030	3000K	800	>0.9	BRR: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&PWM ZIGBEE	AC100~277V [DC24V]
GTG5131D-10W-NW			4000K	830				
GTG5131D-10W-CW			6000K	850				
GTG5131D22-12W-CW	2C@12W	12CW	WW	CW	600			DC24V
GTG5131D32-12W-RGB	3C@12W	12RGB	R	G	B	360		
GTG5131D42-12W-RGBW	4C@12W	12RGBW	R	G	B	W	480	