

FEATURE

Refined Seamless Splicing Linear Lighting
 Skilled Manufacturing to Keep Durable Uniform Quality
 Color Rendering Index Ra≥90
 Long Lifespan > 50,000hours
 Working Temperature -20℃~40℃

MATERIAL & FINISH

LED Brand: SMD LEDS [LM80]
 Remote Flicker-free Driver Brand: GUBO
 Housing: Anodized Aluminum Profile Housing
 Optics: Clear Linear PMMA Lens

INSTALLATION

False Ceiling Recessed
 Widely Application for Recessed Ceiling Light, Like
 Office, Hotel, Shop, Home,.....

STANDARD

Designed and Manufactured to Comply with
 CE/ROHS/EMF/GS/CB/cUL/SAA/SASO Standard
 IP20 and IK06 Protection, Class II Electrical



OPTION

LED CCT: 1800K/2700K/3500K/5000K/5500K
 LED Color: Red, Green, Blue, Amber
 Personal Eye Protection Standard: RG0 (EN166:2001)
 Color Rendering Index: Ra80, Ra97
 [BLL] : Antiglare Frosted Linear Lens[UGR≤16]
 [BPS] : Antiglare Polarized Lens (Wall Washing)
 [BPD] : Antiglare Polarized Lens (Dual Side)
 Housing Finish Color: (Any Colors in RAL#)

SILVER [H03]	BLACK [H02]	GREY [H03]	BROWN [H06]

							
100-277V	WARRANTY	SMD2835	60/90° P25/2x25°	IP20	EURO	USA.CA	IECEE


SECTION



SPLICER			
[SP180H]	[SP90H]	[SP90V]	[SLCI]



CASE STUDY

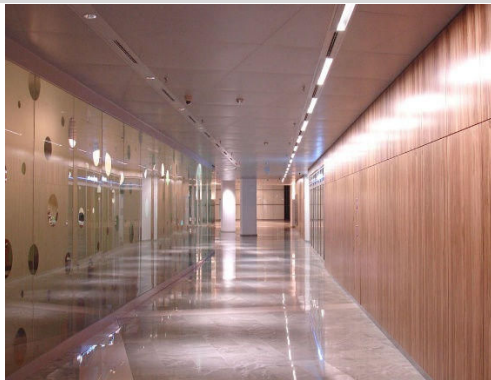

POLARIZED LENS


[BPS]



[BPD]



DIMENSION: [UNIT: MM]

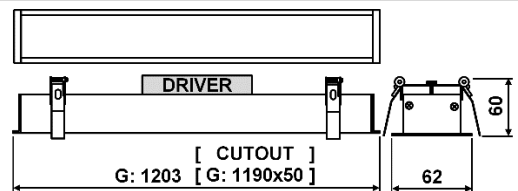

MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT 【V】				
GTR7212G-40W-WW27	40W	144x0.5W SMD2835	2700K	RA80	4000	>0.9	[BLL]: 60/90° [BPS]: P25° [BPD]: 2xP25	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ				
GTR7212G-40W-WW30			3000K	RA80	4260								
GTR7212G-40W-NW35			3500K	RA80	4760								
GTR7212G-40W-NW40			4000K	RA80	4760								
GTR7212G-40W-PW50			5000K	RA80	4760								
GTR7212G-40W-CW60			6000K	RA80	5010								
GTR7212G-40W-TW27	2C@40W	96TW	WW27 CW60	RA80	4000	>0.9				[BLL]: 60/90° [BPS]: P25° [BPD]: 2xP25	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ	
GTR7212G-40W-RGBW27	4C@40W	96RGBW	R G B W	RA80	4000	>0.5							
GTR7212G-40W-WW27G	40W	144x0.5W SMD2835	G2700K	RA90	3510	>0.9		[CV DRIVER] [PWM]	[CV DRIVER] [DC24V]				
GTR7212G-40W-WW30G			G3000K	RA90	3760								
GTR7212G-40W-NW35G			G3500K	RA90	4260								
GTR7212G-40W-NW40G			G4000K	RA90	4260								
GTR7212G-40W-PW50G			G5000K	RA90	4260								
GTR7212G-40W-CW60G			G6000K	RA90	4510								
GTR7212G-40W-TW27G	2C@40W	96TW	WW27 CW60	RA90	3510	>0.9					[BLL]: 60/90° [BPS]: P25° [BPD]: 2xP25	[CV DRIVER] [PWM]	[CV DRIVER] [DC24V]
GTR7212G-40W-RGBW27G	4C@40W	96RGBW	R G B W	RA90	3510	>0.5							