


PROFILE



[BDU]



"N" CLIP



【ACL180】



【ACL90】



【ACT90】



【ACX90】

FEATURES

Creative Innovation of Optimized LED Technology
Seamless Connection Freedom Lighting
Perfect Combination of Lighting and Space
Color Rendering Index Ra>80 【Ra>90】
Long Lifespan Design>50,000hours
Working Temperature: -20°C~50°C

MATERIALS & FINISH

LED Branding: EPISTAR
External Driver Branding: GTE
GTE' Patent Aluminum Radiator Profile
High Efficiency Frosted PC Diffuser

INSTALLATION

Installation: False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS


Designed and Manufactured to Comply with
TUV/GS/CE/RoHS/EMF/SAA/Erp/UL/cUL/FCC
IP20 Protection, Class II & I Electric

OPTIONS

LED Color Temperature: CCT2000~6500K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
LED Branding: PHILIPS, CREE, OSRAM
Driver Branding: PHILIPS, TRIDONIX, MEANWELL
[BDU] Version: "U-type" Diffuser
[CBE] Emergency Version: 3W or 5W or 10W
Dimming Type: 1-10V, Triac, DALI, RF, DMX512, WIFI
Housing Finish Color:



DIMENSION: [UNIT: MM]

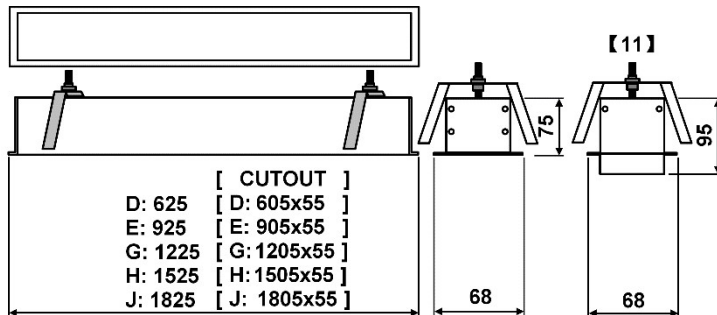

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR7132D-20W-WW	20W	120x0.5W SMD2835	3000K	2000	>0.9	120° 180°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~277V] 50/60Hz [DC24V]
GTR7132D-20W-NW			4000K	2050				
GTR7132D-20W-CW			6000K	2120				
GTR7132D22-20W-CW	2C@20W	48CW	WW CW	1700	>0.9			
GTR7132D42-24W-RGBW	4C@24W	48RGBW	R GB W	1680	>0.5			
GTR7132D52-24W-RGBCW	5C@24W	48RGB+48CW	R GB WW	1680	>0.5			
GTR7132E-30W-WW	30W	180x0.5W SMD2835	3000K	3000	>0.9	120° 180°		
GTR7132E-30W-NW			4000K	3060				
GTR7132E-30W-CW			6000K	3150				
GTR7132G-40W-WW	40W	240x0.5W SMD2835	3000K	4000	>0.9	120° 180°		
GTR7132G-40W-NW			4000K	4100				
GTR7132G-40W-CW			6000K	4300				
GTR7132G22-40W-CW	2C@40W	96CW	WW CW	3400	>0.9			
GTR7132G42-48W-RGBW	4C@48W	96RGBW	R GB W	3360	>0.5			
GTR7132G52-48W-RGBCW	5C@48W	96RGB+96CW	R GB WW	3360	>0.5			
GTR7132H-50W-WW	50W	300x0.5W SMD2835	3000K	5000	>0.9	120° 180°		
GTR7132H-50W-NW			4000K	5100				
GTR7132H-50W-CW			6000K	5250				
GTR7132J-60W-WW	60W	360x0.5W SMD2835	3000K	6000	>0.9	120° 180°		
GTR7132J-60W-NW			4000K	6120				
GTR7132J-60W-CW			6000K	6300				

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.