

INTRODUCTION

FEATURE

Modern Post Top Area Lighting
Upgrade LED Lighting Design
Easy Installation and Maintenance
Non-glare Uniform Light Distribution
Color Rendering Index > 80
Long Lifespan > 50,000hours
Working Temperature: -30°C~50°C

MAIN MATERIAL

LED Brand: CREE
Driver Brand: GUBO
Housing: Die-casted Aluminum
Optics: Quadric Dome Reflector
Diffuser: Clear PC Diffuser

INSTALLATION



Installation: Post-Top Mount
Mounting: Φ60mm Post
Suitable for Road Light, like Street, Park.....

STANDARD

Designed and Manufactured to Comply with
CE/RoHS/CB/cETL/SAA Standard
IP65 Protection, Class I Electric

OPTION


LED CCT: 1700K/2200K/2700K/3500K/5000K
Driver Brand: INVENTRONICS, LUMILEDS
[Post]: Height 1M/1.2M/3.5M/4.5M/6M
[CSC]: Photocell Sensor
Custom Housing Color Finish: (Any Colors in RAL)

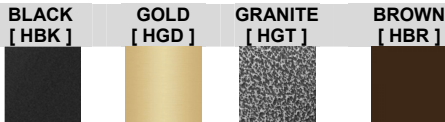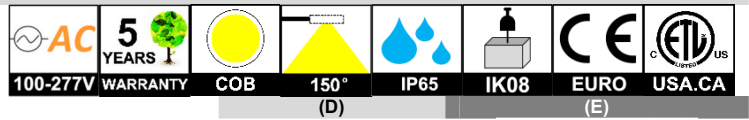

CASE STUDY:



DIMENSION: [UNIT: MM]

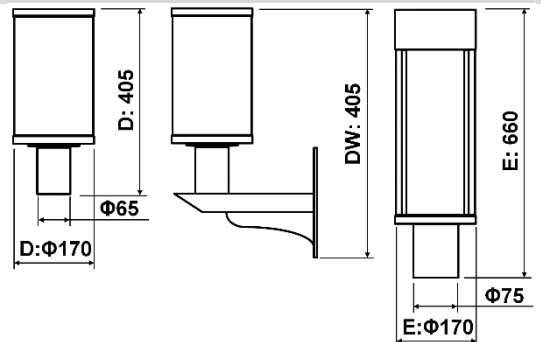

MODEL	POWER 【W】	LED TYPE	CCT 【K】	FLUX 【LM】	POWER FACTOR	BEAM ANGLE	OPTIOINAL DIMMING	INPUT 【V】		
GTE2115D-20W-VVW30	20W	CXA2520 CREE COB	3000K	1480	>0.9	BRR: T5: 150°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V 50/60Hz [DC24V]		
GTE2115D-20W-NW40			4000K	1540						
GTE2115D-20W-CW57			5700K	1580						
GTE2115D-30W-VVW30	30W	CXA2530 CREE COB	3000K	2330	>0.9	BRR: T5: 120°				
GTE2115D-30W-NW40			4000K	2320						
GTE2115D-30W-CW57			5700K	2360						
GTE2115E-50W-VVW30	50W	60x1.5W SMD3030	3000K	4150	>0.9	BRR: T5: 120°				
GTE2115E-50W-NW40			4000K	4500						
GTE2115E-50W-CW57			5700K	4500						

NOTE:

All parameters are measured at 25°C ambient temperature, 35% humidity experimental environment.
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.