

FEATURE

Refined Seamless Splicing Linear Lighting
 Skilled Manufacturing to Keep Durable Uniform Quality
 Color Rendering Index Ra≥80
 Long Lifespan > 50,000hours
 Working Temperature -20℃~40℃

MATERIAL & FINISH

LED Brand: SMD LEDs [LM80]
 Remote Flicker-free Driver Brand: GUBO
 Housing: Anodized Aluminum Profile Housing
 Optics: Frosted PC Diffuser

INSTALLATION

Surface Mounted
 Widely Application for Recessed Ceiling Light, Like
 Office, Home, Hotel.....

STANDARD

Designed and Manufactured to Comply with
 CE/ROHS/EMF/GS/CB/CUL/SAA/SASO Standard
 IP20 and IK06 Protection, Class III Electrical

OPTION

LED CCT: 1800K/2700K/3500K/5000K/5500K
 LED Color: Red, Green, Blue, Amber
 Personal Eye Protection Standard: RG0 (EN166:2001)
 Color Rendering Index: Ra90, Ra97
 [CBE] Emergency: 5/10/20/30/40/60W, 90/180MIN

Housing Finish Color: (Any Colors in RAL#)

SILVER
[H03]

BLACK
[H02]


GREY
[H03]

BROWN
[H06]


CASE STUDY




SURFACE MOUNTED LED LINEAR LIGHT




SECTION

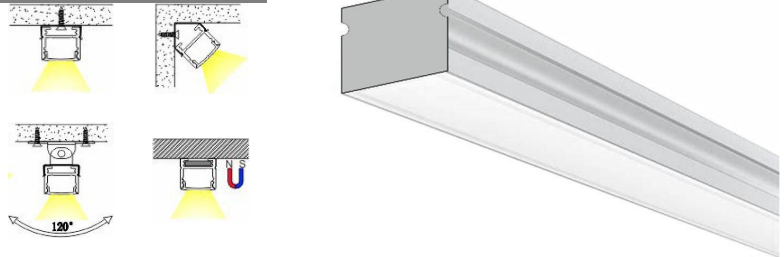

ACCESSORIES

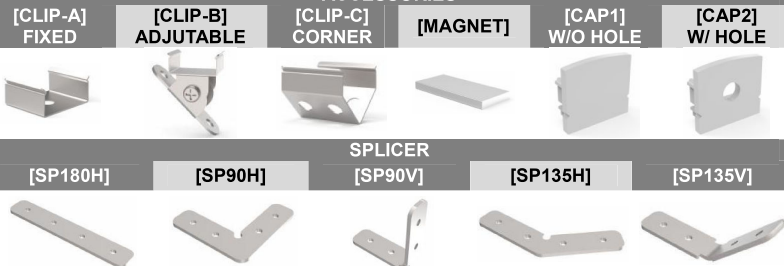

DIMENSION: [UNIT: MM]

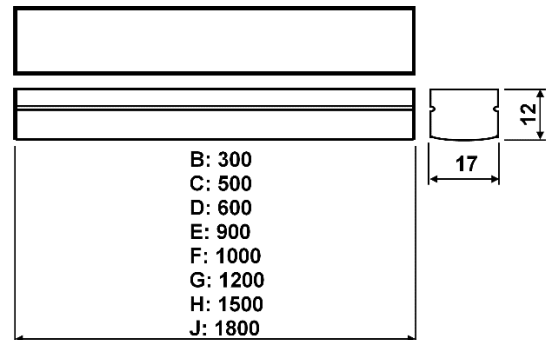

MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT 【V】
GTR7401B-4W-WW30	4W	36x0.5W SMD2835	3000K	RA80	410	>0.5	120°	PWM	DC24V
GTR7401B-4W-NW40			4000K		430				
GTR7401B-4W-CW60			6000K		450				
GTR7401B-4W-TW	2C@4W	24TW	WW27 CW60	RA80	320	>0.3			
GTR7401B-5W-RGBW	3C&1W+2W	24RGBW	R G B W	RA80	250	>0.3			
GTR7401C-6W-WW30	6W	60x0.5W SMD2835	3000K	RA80	700	>0.6			
GTR7401C-6W-NW40			4000K		725				
GTR7401C-6W-CW60			6000K		765				
GTR7401C-6W-TW	2C@6W	36TW	WW27 CW60	RA80	480	>0.4			
GTR7401C-8W-RGBW	3C&1.5W+4W	60RGBW	R G B W	RA80	400	>0.4			
GTR7401D-7W-WW30	7W	72x0.5W SMD2835	3000K	RA80	830	>0.6			
GTR7401D-7W-NW40			4000K		850				
GTR7401D-7W-CW60			6000K		900				
GTR7401D-7W-TW	2C@7W	42TW	WW27 CW60	RA80	560	>0.4			
GTR7401D-10W-RGBW	3C&1.8W+5W	72RGBW	R G B W	RA80	500	>0.4			
GTR7401E-10W-WW30	10W	108x0.5W SMD2835	3000K	RA80	1240	>0.6			
GTR7401E-10W-NW40			4000K		1280				
GTR7401E-10W-CW60			6000K		1350				
GTR7401E-10W-TW	2C@10W	60TW	WW27 CW60	RA80	800	>0.5			
GTR7401E-14W-RGBW	3C&2.5W+7W	96RGBW	R G B W	RA80	700	>0.5			
GTR7401F-12W-WW30	12W	120x0.5W SMD2835	3000K	RA80	1410	>0.6			
GTR7401F-12W-NW40			4000K		1450				
GTR7401F-12W-CW60			6000K		1530				
GTR7401F-12W-TW	2C@12W	72TW	WW27 CW60	RA80	960	>0.6			
GTR7401F-16W-RGBW	3C&3W+8W	120RGBW	R G B W	RA80	800	>0.5			
GTR7401G-14W-WW30	14W	144x0.5W SMD2835	3000K	RA80	1650	>0.6			
GTR7401G-14W-NW40			4000K		1700				
GTR7401G-14W-CW60			6000K		1800				
GTR7401G-14W-TW	2C@14W	90TW	WW27 CW60	RA80	1130	>0.6			
GTR7401G-20W-RGBW	3C&4W+10W	144RGBW	R G B W	RA80	1000	>0.5			
GTR7401H-18W-WW30	18W	162x0.5W SMD2835	3000K	RA80	2100	>0.9			
GTR7401H-18W-NW40			4000K		2170				
GTR7401H-18W-CW60			6000K		2300				
GTR7401H-18W-TW	2C@18W	108TW	WW27 CW60	RA80	1450	>0.7			
GTR7401H-24W-RGBW	3C&5W+12W	180RGBW	R G B W	RA80	1200	>0.6			
GTR7401J-20W-WW30	20W	216x0.5W SMD2835	3000K	RA80	2480	>0.9			
GTR7401J-20W-NW40			4000K		2560				
GTR7401J-20W-CW60			6000K		2700				
GTR7401J-20W-TW	2C@20W	120TW	WW27 CW60	RA80	1600	>0.7			
GTR7401J-30W-RGBW	3C&6W+15W	192RGBW	R G B W	RA80	1500	>0.6			