

LED Grille Troffer Light & PANEL LIGHT

CIP




The CIP Lighting, LED Office Lights are the perfect replacement for existing fluorescent lights. Our exclusive high-performance LED technology, advanced light distribution, and attractive appearance deliver unprecedented energy savings and the most advanced luminaries for general lighting applications. Our focus on this series is high performance and competitive price, and we hit the mark on both points.





[EURO] LED GRILLE PANEL LIGHT




FRONTVIEW BACKVIEW




[AMA]


[AMR]



DIMENSION: [UNIT: MM]

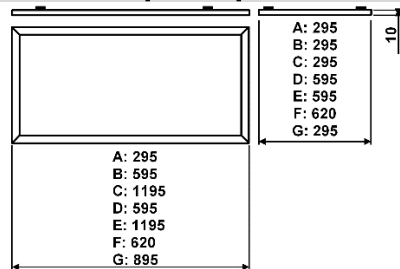

[AMP]



INTRODUCTION

FEATURES

Concise Optimized LED Lighting Structure
Uniform Soft Lighting [UGR≤19]
Color Rendering Index Ra≥80
Long Lifespan Design > 50,000 hours
Working Ambient Temperature: -30°C~+50°C

MATERIALS & FINISH

LED Brand: SMD LEDs (LM80)
Remote Flicker-free Driver Brand: GUBO
Housing: Aluminum Profile
Optics: Nano Paper Reflector and PMMA LGP
Diffuser: Frosted PC Diffuser

INSTALLATION

T-bar Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS

Designed and Manufactured to Comply with
TUV/CE/RoHS/CB/SAA/Erp/cETL/FCC
IP20 Protection, Class II Electric

OPTIONS

LED CCT: 2700K/3500K/6000K/6000K
[AMA]: Surface Mounted Fixture [H50mm]
[AMR]: Semi-Recessed Spring Clamp
[AMP]: Pendant Kits (Flexible or Conduit)
Trim Color Finish: Any Color in RAL.

WHITE BLACK SILVER GOLDEN

CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】		
GTR5101A-15W-WW30	15W	96x0.5W SMD2835	3000K	1630	>0.9	120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]		
GTR5101A-15W-NW40			4000K	1730						
GTR5101A-15W-CW60			6000K	1730						
GTR5101A-20W-WW30	20W	96x0.5W SMD2835	3000K	2330	>0.9					
GTR5101A-20W-NW40			4000K	2480						
GTR5101A-20W-CW60			6000K	2480						
GTR5101A-20W-TW	2C@20W	48TW	WW27	CW60	1800				>0.8	
GTR5101A-20W-RGBW	4C@20W	48RGBW	R	G	B				W	>0.5
GTR5101B-20W-WW30	20W	144x0.5W SMD2835	3000K	2330	>0.9					
GTR5101B-20W-NW40			4000K	2480						
GTR5101B-20W-CW60			6000K	2480						
GTR5101B-30W-WW30	30W	144x0.5W SMD2835	3000K	3260	>0.9					
GTR5101B-30W-NW40			4000K	3470						
GTR5101B-30W-CW60			6000K	3470						
GTR5101B-30W-TW	2C@30W	96TW	WW27	CW60	2700				>0.9	
GTR5101B-30W-RGBW	4C@30W	96RGBW	R	G	B				W	>0.7
GTR5101C-40W-WW30	40W	240x0.5W SMD2835	3000K	4660	>0.9					
GTR5101C-40W-NW40			4000K	4960						
GTR5101C-40W-CW60			6000K	4960						
GTR5101C-50W-WW30	50W	240x0.5W SMD2835	3000K	5600	>0.9					
GTR5101C-50W-NW40			4000K	5950						
GTR5101C-50W-CW60			6000K	5950						
GTR5101C-40W-TW	2C@40W	96TW	WW27	CW60	3600				>0.9	
GTR5101C-40W-RGBW	4C@40W	96RGBW	R	G	B				W	>0.7
GTR5101D-40W-WW30	40W	240x0.5W SMD2835	3000K	4660	>0.9					
GTR5101D-40W-NW40			4000K	4960						
GTR5101D-40W-CW60			6000K	4960						
GTR5101D-50W-WW30	50W	240x0.5W SMD2835	3000K	5600	>0.9					
GTR5101D-50W-NW40			4000K	5950						
GTR5101D-50W-CW60			6000K	5950						
GTR5101D-40W-TW	2C@40W	96TW	WW27	CW60	3600				>0.9	
GTR5101D-40W-RGBW	4C@40W	96RGBW	R	G	B				W	>0.7
GTR5101E-50W-WW30	50W	480x0.5W SMD2835	3000K	5600	>0.9					
GTR5101E-50W-NW40			4000K	5950						
GTR5101E-50W-CW60			6000K	5950						
GTR5101E-60W-WW30	60W	480x0.5W SMD2835	3000K	7000	>0.9					
GTR5101E-60W-NW40			4000K	7440						
GTR5101E-60W-CW60			6000K	7440						
GTR5101E-80W-WW30	80W	480x0.5W SMD2835	3000K	9200	>0.9					
GTR5101E-80W-NW40			4000K	9650						
GTR5101E-80W-CW60			6000K	10000						
GTR5101E-80W-TW	2C@80W	192TW	WW27	CW60	7000				>0.9	
GTR5101E-80W-RGBW	4C@80W	192RGBW	R	G	B				W	>0.7
GTR5101F-50W-WW30	50W	240x0.5W SMD2835	3000K	5600	>0.9					
GTR5101F-50W-NW40			4000K	5950						
GTR5101F-50W-CW60			6000K	5950						
GTR5101F-40W-TW	2C@40W	96TW	WW27	CW60	3600				>0.9	
GTR5101F-40W-RGBW	4C@40W	96RGBW	R	G	B				W	>0.7
GTR5101G-50W-WW30	40W	240x0.5W SMD2835	3000K	4660	>0.9					
GTR5101G-50W-NW40			4000K	4960						
GTR5101G-50W-CW60			6000K	4960						
GTR5101G-40W-TW	2C@40W	96TW	WW27	CW60	3600				>0.9	
GTR5101G-40W-RGBW	4C@40W	96RGBW	R	G	B				W	>0.7

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com



INTRODUCTION

FEATURES

- Concise Uniform Soft Lighting [UGR≤19]
- Color Rendering Index Ra≥80
- Long Lifespan Design >50,000hours
- Working Ambient Temperature: -30°C~+50°C

MATERIALS & FINISH

- LED Brand: SMD LEDs (LM80)
- Remote Flicker-free Driver Brand: GUBO
- Housing: Aluminum Profile
- Optics: Nano Paper Reflector and PMMA LGP
- Diffuser: Frosted PC Diffuser

INSTALLATION

- T-bar Ceiling Recessed
- Suitable for Interior Ceiling Light, like Office.....

STANDARDS


- Designed and Manufactured to Comply with TUV/CE/RoHS/CB/SAA/Erp/cUL/FCC
- Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
- IP20 Protection, Class II Electric

OPTIONS

- LED CCT: 2700K/3500K/4500K/5000K/6000K
- [AMA]: Surface Mounted Fixture [H50mm]
- [AMR]: Semi-Recessed Spring Clamp
- [AMP]: Pendant Kits (Flexible or Conduit)
- Trim Color Finish: Any Color in RAL

WHITE BLACK SILVER


[AMERICA] LED GRILLE PANEL LIGHT

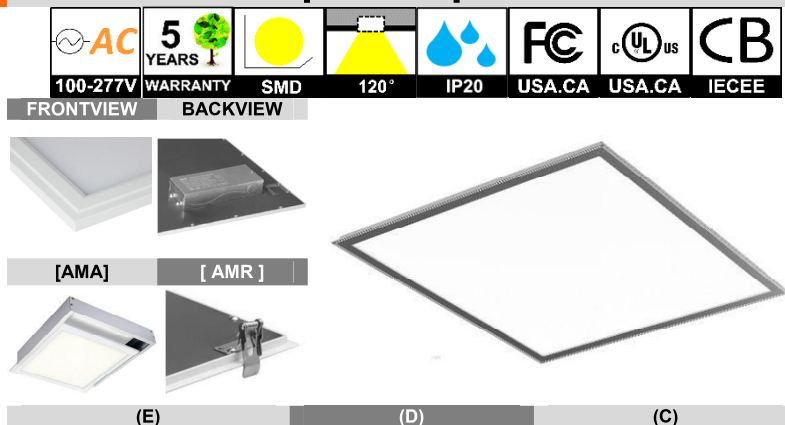

CASE STUDY



DIMENSION: [UNIT: MM]

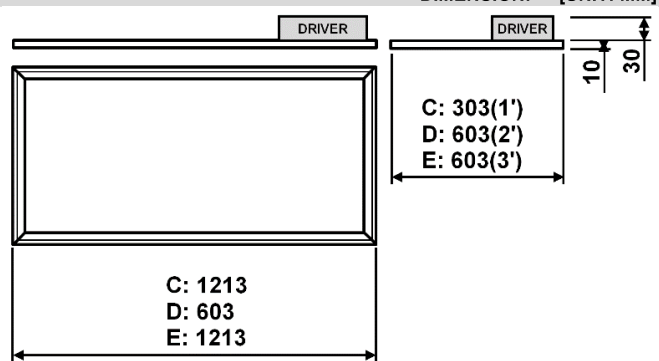


MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI 【RA】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR5121C(D)-24W-WW30	25W	240x0.5W SMD2835	3000K	RA≥80	3000	>0.9	120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]			
GTR5121C(D)-24W-WW35			3500K		3000							
GTR5121C(D)-24W-NW40			4000K		3120							
GTR5121C(D)-24W-CW60			6000K		3250							
GTR5121C(D)-40W-WW30	40W	240x0.5W SMD2835	3000K	RA≥80	4800	>0.9						
GTR5121C(D)-40W-WW35			3500K		4800							
GTR5121C(D)-40W-NW40			4000K		5000							
GTR5121C(D)-40W-CW60			6000K		5200							
GTR5121C(D)-45W-WW30	45W	240x0.5W SMD2835	3000K	RA≥80	5310	>0.9						
GTR5121C(D)-45W-WW35			3500K		5310							
GTR5121C(D)-45W-NW40			4000K		5530							
GTR5121C(D)-45W-CW60			6000K		5760							
GTR5121C(D)-45W-WW30G	45W	240x0.5W SMD2835	G3000K	RA≥90	4500	>0.9						
GTR5121C(D)-45W-WW35G			G3500K		4500							
GTR5121C(D)-45W-NW40G			G4000K		4720							
GTR5121C(D)-45W-CW60G			G6000K		4950							
GTR5121C(D)-45W-TW	2C@45W	144TW	WW27	RA≥80	4000	>0.8						
GTR5121C(D)-45W-RGBW	4C@45W	144RGBW	R G B W	\	4000	>0.6						
GTR5121E-32W-WW30	32W	480x0.5W SMD2835	3000K	RA≥80	3840	>0.9						
GTR5121E-32W-WW35			3500K		3840							
GTR5121E-32W-NW40			4000K		4000							
GTR5121E-32W-WW30			6000K		4240							
GTR5121E-40W-WW30	40W	480x0.5W SMD2835	3000K	RA≥80	4800	>0.9						
GTR5121E-40W-WW35			3500K		4800							
GTR5121E-40W-NW40			4000K		5000							
GTR5121E-40W-CW60			6000K		5200							
GTR5121E-50W-WW30	50W	480x0.5W SMD2835	3000K	RA≥80	6000	>0.9						
GTR5121E-50W-WW35			3500K		6000							
GTR5121E-50W-NW40			4000K		6250							
GTR5121E-50W-CW60			6000K		6500							
GTR5121E-60W-WW30	60W	480x0.5W SMD2835	3000K	RA≥80	7000	>0.9						
GTR5121E-60W-WW35			3500K		7000							
GTR5121E-60W-NW40			4000K		7300							
GTR5121E-60W-CW60			6000K		7600							
GTR5121E-72W-WW30	72W	480x0.5W SMD2835	3000K	RA≥80	7980	>0.9						
GTR5121E-72W-WW35			3500K		7980							
GTR5121E-72W-NW40			4000K		8340							
GTR5121E-72W-CW60			6000K		8700							
GTR5121E-72W-WW30G	72W	480x0.5W SMD2835	G3000K	RA≥90	6900	>0.9						
GTR5121E-72W-WW35G			G3500K		6900							
GTR5121E-72W-NW40G			G4000K		7250							
GTR5121E-72W-CW60G			G6000K		7600							
GTR5121E-72W-TW	2C@72W	288TW	WW27	RA≥80	6000	>0.9						
GTR5121E-72W-RGBW	4C@72W	288RGBW	R G B W	\	6000	>0.7						

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com



LED TROFFER LIGHT



INTRODUCTION

FEATURES

Concise Optimized LED Lighting Structure
High Performance Optical Processing
Uniform Soft Office Lighting
Long Lifespan Design >50,000hours
Working Ambient Temperature: -30℃~+50℃

MATERIALS & FINISH

LED Brand: SMD LEDs (LM80)
Backpack Flicker-free Driver Brand: GUBO
Housing: Painted Steel Housing
Optics: High Efficiency Reflective Steel Slot
Diffuser: Opal PC Diffuser

INSTALLATION

T-bar Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS



Designed and Manufactured to Comply with
TUV/CE/RoHS/CB/SAA/Erp/cETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class I Electric

OPTIONS

LED CCT: 2700K/3500K/6000K/6000K
[CRI]: RA90, RA95, RA97
[AMR]: Semi-Recessed Spring Clamp
Trim Color Finish: Any Color in RAL.

WHITE **BLACK** **GREY**
[H01] [H02] [H03]

DIMENSION: [UNIT: MM]

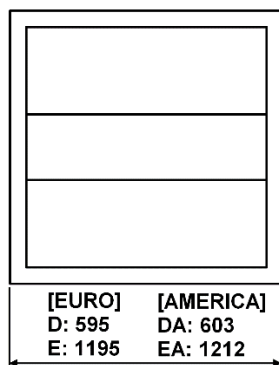

CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI 【RA】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】		
GTR5132D(DA)-35W-WW30	35W	240x0.5W SMD2835	3000K	RA≥80	3790	> 0.9	120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]		
GTR5132D(DA)-35W-WW35			3500K		3790						
GTR5132D(DA)-35W-NW40			4000K		4120						
GTR5132D(DA)-35W-PW50			5000K		4120						
GTR5132D(DA)-35W-WW30G			G3000K		3350						
GTR5132D(DA)-35W-WW35G	35W	240x0.5W SMD2835	G3500K	RA≥90	3350	> 0.9					
GTR5132D(DA)-35W-NW40G			G4000K		3630						
GTR5132D(DA)-35W-PW50G			G5000K		3630						
GTR5132D(DA)-50W-WW30			3000K		5580						
GTR5132D(DA)-50W-WW35			3500K		5580						
GTR5132D(DA)-50W-NW40	50W	240x0.5W SMD2835	4000K	RA≥80	6120	> 0.9					
GTR5132D(DA)-50W-PW50			5000K		6120						
GTR5132D(DA)-50W-WW30G			G3000K		4900						
GTR5132D(DA)-50W-WW35G			G3500K		4900						
GTR5132D(DA)-50W-NW40G			G4000K		5390						
GTR5132D(DA)-50W-PW50G			G5000K		5390						
GTR5132D(DA)-50W-TW	2C@50W	96TW	WW27	CW60	RA≥90	4900				> 0.8	
GTR5132D(DA)-50W-RGBW	4C@50W	96RGBW	R	G	B	W					4900
GTR5132E(EA)-50W-WW30	50W	240x0.5W SMD2835	3000K	RA≥80	5580	> 0.9					
GTR5132E(EA)-50W-WW35			3500K		5580						
GTR5132E(EA)-50W-NW40			4000K		6120						
GTR5132E(EA)-50W-PW50			5000K		6120						
GTR5132E(EA)-60W-WW30			3000K		6840						
GTR5132E(EA)-60W-WW35	60W	480x0.5W SMD2835	3500K	RA≥80	6840	> 0.9					
GTR5132E(EA)-60W-NW40			4000K		6250						
GTR5132E(EA)-60W-PW50			5000K		6250						
GTR5132E(EA)-60W-WW30G			G3000K		6100						
GTR5132E(EA)-60W-WW35G			G3500K		6100						
GTR5132E(EA)-60W-NW40G	60W	480x0.5W SMD2835	G4000K	RA≥90	6700	> 0.9					
GTR5132E(EA)-60W-PW50G			G5000K		6700						
GTR5132E(EA)-72W-WW30			3000K		7980						
GTR5132E(EA)-72W-WW35			3500K		7980						
GTR5132E(EA)-72W-NW40			4000K		8340						
GTR5132E(EA)-72W-PW50	72W	480x0.5W SMD2835	5000K	RA≥80	8700	> 0.9					
GTR5132E(EA)-72W-WW30G			G3000K		6900						
GTR5132E(EA)-72W-WW35G			G3500K		6900						
GTR5132E(EA)-72W-NW40G			G4000K		7250						
GTR5132E(EA)-72W-PW50G			G5000K		7600						
GTR5132E(EA)-72W-TW			2C@72W		192TW		WW27	CW60	RA≥90	7200	> 0.9
GTR5132E(EA)-72W-RGBW	4C@72W	192RGBW	R	G	B	W	7200	> 0.7			

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

FEATURES

Concise Optimized LED Lighting Structure
High Performance Optical Processing
Uniform Soft Office Lighting
Long Lifespan Design > 50,000hours
Working Ambient Temperature: -30℃~+50℃

MATERIALS & FINISH

LED Brand: SMD LEDs (LM80)
Backpack Flicker-free Driver Brand: GUBO
Housing: Painted Steel Housing
Optics: High Efficiency Reflective Steel Slot
Diffuser: Opal PC Diffuser

INSTALLATION

T-bar Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....


STANDARDS

Designed and Manufactured to Comply with
TUV/CE/RoHS/CB/SAA/Erp/cETL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class I Electric

OPTIONS

LED CCT: 2700K/3500K/6000K/6000K
[CRI]: RA90, RA95, RA97
[AMR]: Semi-Recessed Spring Clamp
Trim Color Finish: Any Color in RAL.


WHITE BLACK SILVER



CASE STUDY



DIMENSION: [UNIT: MM]

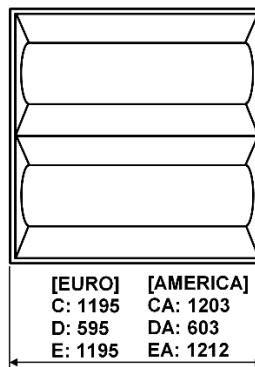


[EURO]	[AMERICA]
C: 295	CA: 298
D: 595	DA: 603
E: 595	EA: 603

MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI 【RA】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】		
GTR5133C(CA/D/DA)-35W-WW30	35W	240x0.5W SMD2835	3000K	RA≥80	3790	>0.9	120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]		
GTR5133C(CA/D/DA)-35W-WW35			3500K		3790						
GTR5133C(CA/D/DA)-35W-NW40			4000K		4120						
GTR5133C(CA/D/DA)-35W-PW50			5000K		4120						
GTR5133C(CA/D/DA)-35W-WW30G	35W	240x0.5W SMD2835	G3000K	RA≥90	3350	>0.9					
GTR5133C(CA/D/DA)-35W-WW35G			G3500K		3350						
GTR5133C(CA/D/DA)-35W-NW40G			G4000K		3630						
GTR5133C(CA/D/DA)-35W-PW50G			G5000K		3630						
GTR5133C(CA/D/DA)-50W-WW30	50W	240x0.5W SMD2835	3000K	RA≥80	5580	>0.9					
GTR5133C(CA/D/DA)-50W-WW35			3500K		5580						
GTR5133C(CA/D/DA)-50W-NW40			4000K		6120						
GTR5133C(CA/D/DA)-50W-PW50			5000K		6120						
GTR5133C(CA/D/DA)-50W-WW30G	50W	240x0.5W SMD2835	G3000K	RA≥90	4900	>0.9					
GTR5133C(CA/D/DA)-50W-WW35G			G3500K		4900						
GTR5133C(CA/D/DA)-50W-NW40G			G4000K		5390						
GTR5133C(CA/D/DA)-50W-PW50G			G5000K		5390						
GTR5133C(CA/D/DA)-50W-TW	2C@50W	96TW	WW27	CW60	RA≥90	4900				>0.8	
GTR5133C(CA/D/DA)-50W-RGBW	4C@50W	96RGBW	R	G	B	W				4900	>0.6
GTR5133E(EA)-50W-WW30	50W	240x0.5W SMD2835	3000K	RA≥80	5580	>0.9					
GTR5133E(EA)-50W-WW35			3500K		5580						
GTR5133E(EA)-50W-NW40			4000K		6120						
GTR5133E(EA)-50W-PW50			5000K		6120						
GTR5133E(EA)-60W-WW30	60W	480x0.5W SMD2835	3000K	RA≥80	6640	>0.9					
GTR5133E(EA)-60W-WW35			3500K		6640						
GTR5133E(EA)-60W-NW40			4000K		7060						
GTR5133E(EA)-60W-PW50			5000K		7500						
GTR5133E(EA)-60W-WW30G	60W	480x0.5W SMD2835	G3000K	RA≥90	6100	>0.9					
GTR5133E(EA)-60W-WW35G			G3500K		6100						
GTR5133E(EA)-60W-NW40G			G4000K		6700						
GTR5133E(EA)-60W-PW50G			G5000K		6700						
GTR5133E(EA)-72W-WW30	72W	480x0.5W SMD2835	3000K	RA≥80	7980	>0.9					
GTR5133E(EA)-72W-WW35			3500K		7980						
GTR5133E(EA)-72W-NW40			4000K		8340						
GTR5133E(EA)-72W-PW50			5000K		8700						
GTR5133E(EA)-72W-WW30G	72W	480x0.5W SMD2835	G3000K	RA≥90	6900	>0.9					
GTR5133E(EA)-72W-WW35G			G3500K		6900						
GTR5133E(EA)-72W-NW40G			G4000K		7250						
GTR5133E(EA)-72W-PW50G			G5000K		7600						
GTR5133E(EA)-72W-TW	2C@72W	192TW	WW27	CW60	RA≥90	7200				>0.9	
GTR5133E(EA)-72W-RGBW	4C@72W	192RGBW	R	G	B	W				7200	>0.7



LED TROFFER LOUVER LIGHT

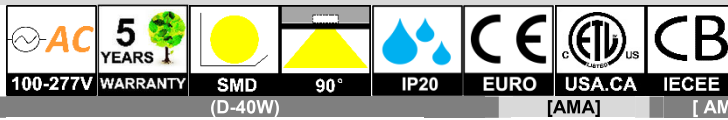

(A-10W)

(B-20W)

(C-20W)



(DD-20W)



(DT-30W)



(E-80W)



INTRODUCTION

FEATURES

- Concise Uniform Soft Lighting
- Anti-glare Eye-care Lighting, UGR≤16
- Long Lifespan Design >50,000hours
- Working Ambient Temperature: -30℃~+50℃

MATERIALS & FINISH

- LED Brand: SMD LEDS (LM80)
- Internal Flicker-free Driver Brand: GUBO
- Housing: Painted Steel Housing
- Optics: High Efficiency Reflective Steel Slot
- Diffuser: Opal PC Diffuser

INSTALLATION

- T-bar Ceiling Recessed
- Suitable for Interior Ceiling Light, like Office.....

STANDARDS


- Designed and Manufactured to Comply with TUV/CE/RoHS/CB/SA/Erp/cETL/FCC
- IP20 Protection, Class I Electric

OPTIONS

- LED CCT: 2700K/3500K/6000K/6000K
- [CRI]: RA90, RA95, RA97
- [AMR]: Semi-Recessed Spring Clamp
- Trim Color Finish: Any Color in RAL.

WHITE BLACK GREY

DIMENSION: [UNIT: MM]

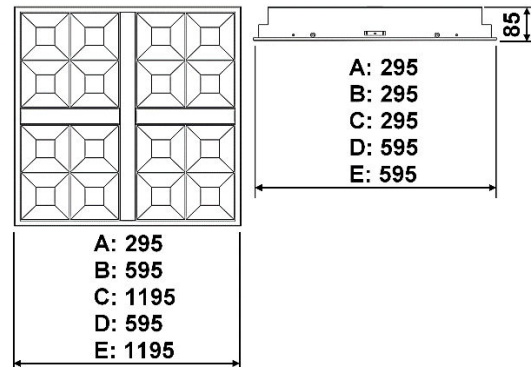

CASE STUDY



MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI 【RA】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTR5151A-10W-WW30	10W	48x0.5W SMD2835	3000K	RA80	1100	>0.9	90°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR5151A-10W-WW35			3500K		1100				
GTR5151A-10W-NW40			4000K		1150				
GTR5151A-10W-PW50			5000K		1250				
GTR5151A-10W-TW	2C@10W	24TW	WW27 CW60	RA80	1100	>0.8			
GTR5151A-10W-RGBW	4C@10W	24RGBW	R G B W	\	1100	>0.6			
GTR5151B-20W-WW30	20W	96x0.5W SMD2835	3000K	RA80	2200	>0.9			
GTR5151B-20W-WW35			3500K		2200				
GTR5151B-20W-NW40			4000K		2300				
GTR5151B-20W-PW50			5000K		2500				
GTR5151B-20W-TW	2C@20W	48TW	WW27 CW60	RA80	2200	>0.8			
GTR5151C-40W-RGBW	4C@20W	48RGBW	R G B W	\	2200	>0.6			
GTR5151C-40W-WW30	40W	192x0.5W SMD2835	3000K	RA80	4400	>0.9			
GTR5151C-40W-WW35			3500K		4400				
GTR5151C-40W-NW40			4000K		4600				
GTR5151C-40W-PW50			5000K		5000				
GTR5151C-40W-TW	2C@40W	96TW	WW27 CW60	RA80	4400	>0.8			
GTR5151C-40W-RGBW	4C@40W	96RGBW	R G B W	\	4400	>0.6			
GTR5151CS-30W-WW30	30W	96x0.5W SMD2835	3000K	RA80	3000	>0.9			
GTR5151CS-30W-WW35			3500K		3000				
GTR5151CS-30W-NW40			4000K		3350				
GTR5151CS-30W-PW50			5000K		3550				
GTR5151D-40W-WW30	40W	192x0.5W SMD2835	3000K	RA80	4400	>0.9			
GTR5151D-40W-WW35			3500K		4400				
GTR5151D-40W-NW40			4000K		4600				
GTR5151D-40W-PW50			5000K		5000				
GTR5151D-40W-TW	2C@40W	96TW	WW27 CW60	RA80	4400	>0.8			
GTR5151D-40W-RGBW	4C@40W	96RGBW	R G B W	\	4400	>0.6			
GTR5151DD-20W-WW30	20W	96x0.5W SMD2835	3000K	RA80	2200	>0.9			
GTR5151DD-20W-WW35			3500K		2200				
GTR5151DD-20W-NW40			4000K		2300				
GTR5151DD-20W-PW50			5000K		2500				
GTR5151DT-30W-WW30	30W	108x0.5W SMD2835	3000K	RA80	3300	>0.9			
GTR5151DT-30W-WW35			3500K		3300				
GTR5151DT-30W-NW40			4000K		3450				
GTR5151DT-30W-PW50			5000K		3750				
GTR5151E-80W-WW30	80W	384x0.5W SMD2835	3000K	RA80	8800	>0.9			
GTR5151E-80W-WW35			3500K		8800				
GTR5151E-80W-NW40			4000K		9200				
GTR5151E-80W-PW50			5000K		9800				
GTR5151E-80W-TW	2C@80W	192TW	WW27 CW60	RA80	8800	>0.9			
GTR5151E-80W-RGBW	4C@80W	192RGBW	R G B W	\	8800	>0.7			
GTR5151E-100W-WW30	100W	384x0.5W SMD2835	G3000K	RA≥80	10500	>0.9			
GTR5151E-100W-WW35			G3500K		10500				
GTR5151E-100W-NW40			G4000K		11000				
GTR5151E-100W-PW50			G5000K		11500				

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

FEATURES

Concise Uniform Soft Lighting
Anti-glare Eye-care Lighting, UGR≤16
Color Rendering Index Ra≥80
Long Lifespan Design > 50,000hours
Working Ambient Temperature: -30°C~+50°C

MATERIALS & FINISH

LED Brand: SMD LEDs (LM80)
Remote Flicker-free Driver Brand: GUBO
Housing: Aluminum Profile
Optics: Nano Paper Reflector and Reflector
Diffuser: Frosted PC Diffuser

INSTALLATION

T-bar Ceiling Recessed
Suitable for Interior Ceiling Light, like Office, School.....

STANDARDS

Designed and Manufactured to Comply with
TUV/CE/RoHS/CB/SAA/Erp/cUL/FCC
Withstand Voltage: 3.75KV, Surge Protection: 1.0KV
IP20 Protection, Class II Electric

OPTIONS

LED CCT: 2700K/3500K/4500K/5000K/6000K
[AMA]: Surface Mounted Fixture [H80mm]
[AMR]: Semi-Recessed Spring Clamp
[AMP]: Pendant Kits (Flexible or Conduit)
Housing Color Finish: Any Colors in RAL

WHITE


BLACK

SILVER

CASE STUDY



LED TROFFER LOUVER LIGHT




(C) BAFFLE IN WHITE




(D) BAFFLE IN WHITE



(D) BAFFLE IN BLACK



DIMENSION: [UNIT: MM]

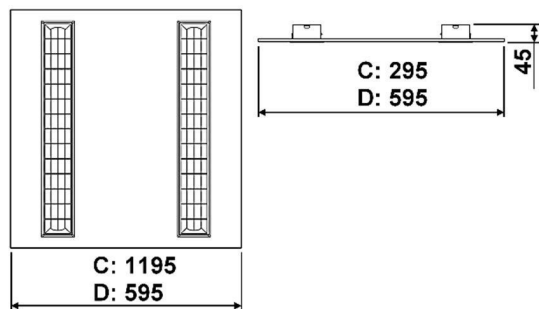


MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI 【RA】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】		
GTR5152C-35W-WW30	35W	192x0.5W SMD2835	3000K	RA≥80	3350	> 0.9	90°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]		
GTR5152C-35W-WW35			3500K		3350						
GTR5152C-35W-NW40			4000K		3630						
GTR5152C-35W-PW50			5000K		3630						
GTR5152C-35W-WW30G	35W	192x0.5W SMD2835	G3000K	RA≥90	2630	> 0.9					
GTR5152C-35W-WW35G			G3500K		2630						
GTR5152C-35W-NW40G			G4000K		2830						
GTR5152C-35W-PW50G			G5000K		2830						
GTR5152C-35W-TW	2C@35W	72TW	WW27 CW60	RA≥80	3350	>0.8					
GTR5152C-35W-RGBW	4C@35W	72RGBW	R G B W	\	3350	>0.6					
GTR5152C-35W-WW30	35W	192x0.5W SMD2835	3000K	RA≥80	3350	> 0.9					
GTR5152C-35W-WW35			3500K		3350						
GTR5152C-35W-NW40			4000K		3630						
GTR5152C-35W-PW50			5000K		3630						
GTR5152C-35W-WW30G	35W	192x0.5W SMD2835	G3000K	RA≥90	2630	> 0.9					
GTR5152C-35W-WW35G			G3500K		2630						
GTR5152C-35W-NW40G			G4000K		2830						
GTR5152C-35W-PW50G			G5000K		2830						
GTR5152C-35W-TW	2C@35W	72TW	WW27 CW60	RA≥80	3350	>0.9					
GTR5152C-35W-RGBW	4C@35W	72RGBW	R G B W	\	3350	>0.7					

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com



RECESSED LED PANEL DOWNLIGHT



SIDEVIEW



BACKVIEW



INTRODUCTION

FEATURES

Concise Optimized Uniform Soft Structure
High Performance Optical Processing
Color Rendering Index Ra≥80
Long Lifespan Design >50,000hours
Working Ambient Temperature: -30℃~+50℃

MATERIALS & FINISH

LED Brand: SMD LEDs (LM80)
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: Nano Paper Reflector and LGP
Diffuser: High Efficiency Frosted PC Diffuser

INSTALLATION

False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS

Designed and Manufactured to Comply with
TUV/CE/RoHS/CB/SA/Erp/cETL/FCC
IP20 Protection, Class II Electric


OPTIONS

LED CCT: 2700K/3500K/6000K/6000K
[CRI]: RA90, RA95, RA97

Trim Color Finish: Any Colors in RAL

WHITE [H01] BLACK [H02] GREY [H03]

DIMENSION: [UNIT: MM]

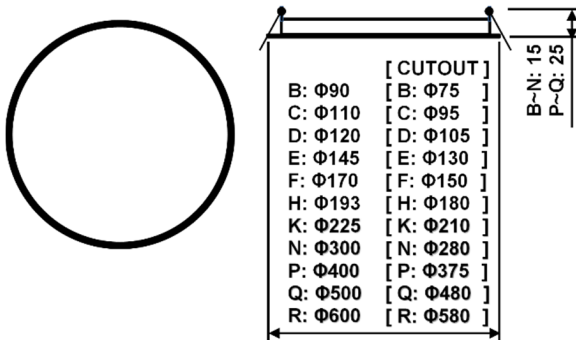

CASE STUDY



MODEL	POWER [W]	LED TYPE	CCT [K]	LUMEN [LM]	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT [V]
GTR5201B-3W-WW30	3W	18x0.5W SMD2835	3000K	320	>0.9	120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR5201B-3W-NW40			4000K	340				
GTR5201B-3W-CW60			6000K	360				
GTR5201B-3W-TW	2C@3W	12TW	WW27	CW60	320	>0.4		
GTR5201C-4W-WW30	4W	24x0.5W SMD2835	3000K	450	>0.9	120°		
GTR5201C-4W-NW40			4000K	480				
GTR5201C-4W-CW60			6000K	510				
GTR5201C-4W-TW	2C@4W	18TW	WW27	CW60	450	>0.4		
GTR5201D-6W-WW30	6W	36x0.5W SMD2835	3000K	645	>0.9	120°		
GTR5201D-6W-NW40			4000K	690				
GTR5201D-6W-CW60			6000K	730				
GTR5201D-6W-TW	2C@6W	24TW	WW27	CW60	645	>0.4		
GTR5201E-9W-WW30	9W	48x0.5W SMD2835	3000K	965	>0.9	120°		
GTR5201E-9W-NW40			4000K	1030				
GTR5201E-9W-CW60			6000K	1090				
GTR5201E-9W-TW	2C@9W	36TW	WW27	CW60	965	>0.6		
GTR5201F-12W-WW30	12W	60x0.5W SMD2835	3000K	1290	>0.9	120°		
GTR5201F-12W-NW40			4000K	1370				
GTR5201F-12W-CW60			6000K	1450				
GTR5201F-12W-TW	2C@12W	48TW	WW27	CW60	1290	>0.7		
GTR5201H-15W-WW30	15W	72x0.5W SMD2835	3000K	1500	>0.9	120°		
GTR5201H-15W-NW40			4000K	1600				
GTR5201H-15W-CW60			6000K	1695				
GTR5201H-15W-TW	2C@15W	60TW	WW27	CW60	1500	>0.8		
GTR5201K-18W-WW30	18W	96x0.5W SMD2835	3000K	1930	>0.9	120°		
GTR5201K-18W-NW40			4000K	2060				
GTR5201K-18W-CW60			6000K	2180				
GTR5201K-18W-TW	2C@18W	72TW	WW27	CW60	1930	>0.8		
GTR5201N-24W-WW30	24W	144x0.5W SMD2835	3000K	2570	>0.9	120°		
GTR5201N-24W-NW40			4000K	2750				
GTR5201N-24W-CW60			6000K	2910				
GTR5201N-24W-TW	2C@24W	96TW	WW27	CW60	2570	>0.9		
GTR5201P-30W-WW30	30W	240x0.5W SMD2835	3000K	3215	>0.9	120°		
GTR5201P-30W-NW40			4000K	3430				
GTR5201P-30W-CW60			6000K	3630				
GTR5201P-30W-TW	2C@0W	144TW	WW27	CW60	3215	>0.9		
GTR5201Q-40W-WW30	40W	360x0.5W SMD2835	3000K	4290	>0.9	120°		
GTR5201Q-40W-NW40			4000K	4580				
GTR5201Q-40W-CW60			6000K	4850				
GTR5201Q-40W-TW	2C@40W	192TW	WW27	CW60	4290	>0.9		
GTR5201R-50W-WW30	50W	432x0.5W SMD2835	3000K	5360	>0.9	120°		
GTR5201R-50W-NW40			4000K	5730				
GTR5201R-50W-CW60			6000K	6060				
GTR5201R-50W-TW	2C@50W	288TW	WW27	CW60	5360	>0.9		

CIP Lighting, 1740 First Baxter Crossing, Fort Mill SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com

INTRODUCTION

FEATURES

Concise Optimized Uniform Soft Structure
High Performance Optical Processing
Color Rendering Index Ra≥80
Long Lifespan Design >50,000hours
Working Ambient Temperature: -30℃~+50℃

MATERIALS & FINISH

LED Brand: SMD LEDS (LM80)
Remote Flicker-free Driver Brand: GUBO
Housing: Die-casted Aluminum Housing
Optics: Nano Paper Reflector and LGP
Diffuser: High Efficiency Frosted PC Diffuser

INSTALLATION

False Ceiling Recessed
Suitable for Interior Ceiling Light, like Office.....

STANDARDS


Designed and Manufactured to Comply with
TUV/CE/RoHS/CB/SAA/Erp/cETL/FCC
IP20 Protection, Class II Electric

OPTIONS

LED CCT: 2700K/3500K/6000K/6000K
[CRI]: RA90, RA95, RA97
Trim Color Finish: Any Colors in RAL

WHITE [H01] BLACK [H02] GREY [H03]

RECESSED LED PANEL DOWNLIGHT




BACKVIEW



CASE STUDY



DIMENSION: [UNIT: MM]



[CUTOUT]	
B: S90	[B: S75]
C: S110	[C: S95]
D: S120	[D: S105]
E: S145	[E: S130]
F: S170	[F: S150]
H: S193	[H: S180]
K: S225	[K: S210]
N: S300	[N: S280]
P: S400	[P: S375]
Q: S500	[Q: S480]
R: S600	[R: S580]

B-N: 15
P-Q: 25

MODEL	POWER [W]	LED TYPE	CCT [K]	LUMEN [LM]	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT [V]
GTR5202B-3W-WW30	3W	18x0.5W SMD2835	3000K	320	>0.9	120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC220~240V [AC100~240V] [AC100~277V] 50/60Hz [DC24V]
GTR5202B-3W-NW40			4000K	340				
GTR5202B-3W-CW60			6000K	360				
GTR5202B-3W-TW	2C@3W	12TW	WW27 CW60	320	>0.4			
GTR5202C-4W-WW30	4W	24x0.5W SMD2835	3000K	450	>0.9	120°		
GTR5202C-4W-NW40			4000K	480				
GTR5202C-4W-CW60			6000K	510				
GTR5202C-4W-TW	2C@4W	18TW	WW27 CW60	450	>0.4			
GTR5202D-6W-WW30	6W	36x0.5W SMD2835	3000K	645	>0.9	120°		
GTR5202D-6W-NW40			4000K	690				
GTR5202D-6W-CW60			6000K	730				
GTR5202D-6W-TW	2C@6W	24TW	WW27 CW60	645	>0.4			
GTR5202E-9W-WW30	9W	48x0.5W SMD2835	3000K	965	>0.9	120°		
GTR5202E-9W-NW40			4000K	1030				
GTR5202E-9W-CW60			6000K	1090				
GTR5202E-9W-TW	2C@9W	36TW	WW27 CW60	965	>0.6			
GTR5202F-12W-WW30	12W	60x0.5W SMD2835	3000K	1290	>0.9	120°		
GTR5202F-12W-NW40			4000K	1370				
GTR5202F-12W-CW60			6000K	1450				
GTR5202F-12W-TW	2C@12W	48TW	WW27 CW60	1290	>0.7			
GTR5202H-15W-WW30	15W	72x0.5W SMD2835	3000K	1500	>0.9	120°		
GTR5202H-15W-NW40			4000K	1600				
GTR5202H-15W-CW60			6000K	1695				
GTR5202H-15W-TW	2C@15W	60TW	WW27 CW60	1500	>0.8			
GTR5202K-18W-WW30	18W	96x0.5W SMD2835	3000K	1930	>0.9	120°		
GTR5202K-18W-NW40			4000K	2060				
GTR5202K-18W-CW60			6000K	2180				
GTR5202K-18W-TW	2C@18W	72TW	WW27 CW60	1930	>0.8			
GTR5202N-24W-WW30	24W	144x0.5W SMD2835	3000K	2570	>0.9	120°		
GTR5202N-24W-NW40			4000K	2750				
GTR5202N-24W-CW60			6000K	2910				
GTR5202N-24W-TW	2C@24W	96TW	WW27 CW60	2570	>0.9			
GTR5202P-30W-WW30	30W	240x0.5W SMD2835	3000K	3215	>0.9	120°		
GTR5202P-30W-NW40			4000K	3430				
GTR5202P-30W-CW60			6000K	3630				
GTR5202P-30W-TW	2C@0W	144TW	WW27 CW60	3215	>0.9			
GTR5202Q-40W-WW30	40W	360x0.5W SMD2835	3000K	4290	>0.9	120°		
GTR5202Q-40W-NW40			4000K	4580				
GTR5202Q-40W-CW60			6000K	4850				
GTR5202Q-40W-TW	2C@40W	192TW	WW27 CW60	4290	>0.9			
GTR5202R-50W-WW30	50W	432x0.5W SMD2835	3000K	5360	>0.9	120°		
GTR5202R-50W-NW40			4000K	5730				
GTR5202R-50W-CW60			6000K	6060				
GTR5202R-50W-TW	2C@50W	288TW	WW27 CW60	5360	>0.9			