

FEATURES

Mercury Free, No UV No Radiation
Advanced LED Technology
Simple Modern Design
Color Rendering Index >80
Long Lifespan >50,000hours

MATERIALS & FINISH

LED Branding: CREE&PHILIPS
Driver Branding: GTE
Die-casted Aluminum Housing
Transparent Glass Diffuser

INSTALLATION

Surface Mounted
Suitable for Garden, Park, Plaza.....

STANDARDS


Designed and Manufactured to Comply with
CE/RoHS/TUV/CB/cUL/SAA Standard
IP65 Protection, Class I Electric

OPTION

LED Color Temperature: CCT2700~6000K
LED Color: Red, Green, Blue, Amber, RGB, RGBW
Dimming Type: 1-10V, TRIAC, DALI, RF, ZIGBEE, WIFI

Housing Color Finish:


GREY [HGR]	BLACK [HBK]	DARK GREY [HGRD]	BROWN [HBR]
			



[E]

[D]

DIMENSION: [UNIT: MM]

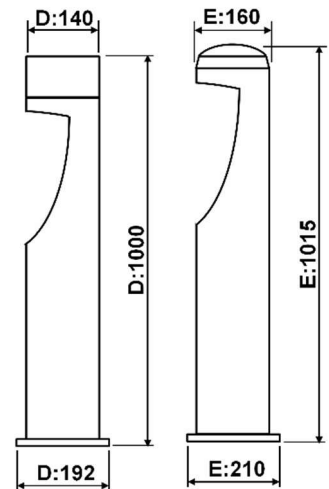

BOLLARD:

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTG5162D-10W-WW	10W	CXA1512 CREE COB	3000K	800	>0.9	BRR: 120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&PWM ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTG5162D-10W-NW			4000K	830				
GTG5162D-10W-PW			5000K	850				
GTG5162D22-12W-CW	2C@10W	15CW	WW	CW	750	>0.5		
GTG5162E-10W-WW	10W	CXA1512 CREE COB	3000K	800	>0.9	BRR: 120°		
GTG5162E-10W-NW			4000K	830				
GTG5162E-10W-PW			5000K	850				
GTG5162E22-12W-CW	2C@10W	15CW	WW	CW	750	>0.5		