

FEATURE

Seamless Splicing Anitglare Linear Lighting (UGR≤16)
 Skilled Manufacturing to Keep Durable Uniform Quality
 Color Rendering Index Ra≥90
 Long Lifespan >50,000hours
 Working Temperature -30℃~50℃

MATERIAL & FINISH

LED Brand: SMD LEDs [LM80]
 Internal Flicker-free Driver Brand: GUBO
 Housing: Anodized Aluminum Profile Housing
 Optics: 5-in-1 PMMA Lens with Reflector

INSTALLATION

Surface Mounted or Suspended
 Widely Application for Recessed Ceiling Light, Like
 Office, Home, Hotel.....

STANDARD

Designed and Manufactured to Comply with
 CE/ROHS/EMF/GS/CB/ETL/SAA/SASO Standard
 IP20 and IK06 Protection, Class III Electrical

OPTION

LED CCT: 1800K/2700K/3500K/5000K/5500K
 LED Color: Red, Green, Blue, Amber
 Personal Eye Protection Standard: RG0 (EN166:2001)
 Color Rendering Index: Ra90, Ra97
 Housing Finish Color: (Any Colors in RAL#)

SILVER [H03]	BLACK [H02]	GREY [H03]	BROWN [H06]


MODEL: DIMENSION(MM)	CEILING CIRCULAR CANOPY: LED DRIVE PLACEABLE				CEILING RECTANGLE CANOPY: LED DRIVE PLACEABLE			
	D6": CRA150 D150xH40 UP TO 60W	D10": CRA250 D250xH40 UP TO 200W	D14": CCD350 D350xH40 UP TO 200W	D20": CCD500 D500xH40 UP TO 500W	L12": CRD300 D305xW140xH40 UP TO 200W	L24": CRD600 D610xW140xH40 UP TO 400W	L36": CRD900 D915xW140xH40 UP TO 600W	L48": CRD1200 D1220xW140xH40 UP TO 800W
APPLICATION:								
IMAGE								

CASE STUDY




PROFILE

DIMENSION: [UNIT: MM]

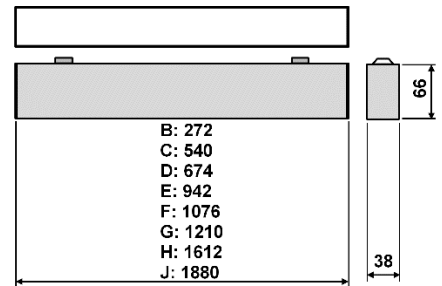

SURFACE MOUNTED LED LINEAR LIGHT

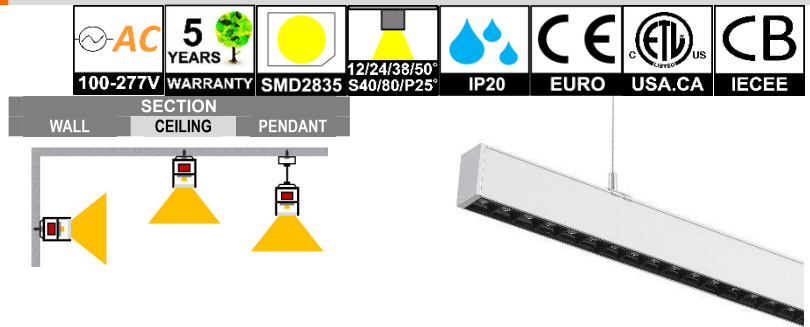

OPTICS LAYOUT	
[BLR] or [BLS]	
[BPS]	
[BLR]+ [BPS]	
[BLR]+ [BDF]	
[BLR]+ [BLD]	

SPLICER			MODEL: DIMENSION(MM)	CEILING SLIM CANOPY ON JBOX		
[SP180H]	[SP180H]	[SP90H]		CRJ125A D125xH5	CSJ125A D125xH5	CRJ125B D125xH5
			IMAGE			

MODEL	POWER [W]	LED TYPE	CCT [K]	CRI	LUMEN [LM]	POWER FACTOR	BEAM ANGLE	OPTIONAL DIMMING	INPUT [V]																						
GTR7502B-8W-WW30G	8W	2x5x1.5W SMD3030	G3000K	RA90	700	> 0.9	[BLR]: 12/24/38/50° [BLS]: 40x40° 60x60° 80x80° 35x70° [BPS]: P25° [BDF]: 120°	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ																						
GTR7502B-8W-NW40G			G4000K	RA90	750																										
GTR7502B-8W-PW50G			G5000K	RA90	750																										
GTR7502B-8W-TW30	2C@8W	2x5TW	WW30	CW60	RA80	540				> 0.9																					
GTR7502B-8W-RGBW30	4C@8W	2x5RGBW	R	G	B	W				RA80	360	> 0.5																			
GTR7502C-15W-WW30G	15W	4x5x1.5W SMD3030	G3000K	RA90	1310	> 0.9				[BLR]: 12/24/38/50° [BLS]: 40x40° 60x60° 80x80° 35x70° [BPS]: P25° [BDF]: 120°	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ																			
GTR7502C-15W-NW40G			G4000K	RA90	1400																										
GTR7502C-15W-PW50G			G5000K	RA90	1400																										
GTR7502C-15W-TW30	2C@15W	4x5TW	WW30	CW60	RA80	900							> 0.9																		
GTR7502C-15W-RGBW30	4C@15W	4x5RGBW	R	G	B	W							RA80	600	> 0.5																
GTR7502D-20W-WW30G	20W	5x5x1.5W SMD3030	G3000K	RA90	1750	> 0.9							[BLR]: 12/24/38/50° [BLS]: 40x40° 60x60° 80x80° 35x70° [BPS]: P25° [BDF]: 120°	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ																
GTR7502D-20W-NW40G			G4000K	RA90	1870																										
GTR7502D-20W-PW50G			G5000K	RA90	1870																										
GTR7502D-20W-TW30	2C@20W	5x5TW	WW30	CW60	RA80	1200										> 0.9															
GTR7502D-20W-RGBW30	4C@20W	5x5RGBW	R	G	B	W										RA80	800	> 0.5													
GTR7502E-24W-WW30G	24W	7x5x1.5W SMD3030	G3000K	RA90	2190	> 0.9										[BLR]: 12/24/38/50° [BLS]: 40x40° 60x60° 80x80° 35x70° [BPS]: P25° [BDF]: 120°	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ													
GTR7502E-24W-NW40G			G4000K	RA90	2330																										
GTR7502E-24W-PW50G			G5000K	RA90	2330																										
GTR7502E-24W-TW30	2C@24W	7x5TW	WW30	CW60	RA80	1500													> 0.9												
GTR7502E-24W-RGBW30	4C@24W	7x5RGBW	R	G	B	W													RA80	1000	> 0.5										
GTR7502F-30W-WW30G	30W	8x5x1.5W SMD3030	G3000K	RA90	2630	> 0.9													[BLR]: 12/24/38/50° [BLS]: 40x40° 60x60° 80x80° 35x70° [BPS]: P25° [BDF]: 120°	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ										
GTR7502F-30W-NW40G			G4000K	RA90	2800																										
GTR7502F-30W-PW50G			G5000K	RA90	2800																										
GTR7502F-30W-TW30	2C@30W	8x5TW	WW30	CW60	RA80	1800																> 0.9									
GTR7502F-30W-RGBW30	4C@30W	8x5RGBW	R	G	B	W																RA80	1200	> 0.5							
GTR7502G-36W-WW30G	36W	9x5x1.5W SMD3030	G3000K	RA90	2920	> 0.9																[BLR]: 12/24/38/50° [BLS]: 40x40° 60x60° 80x80° 35x70° [BPS]: P25° [BDF]: 120°	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ							
GTR7502G-36W-NW40G			G4000K	RA90	3110																										
GTR7502G-36W-PW50G			G5000K	RA90	3110																										
GTR7502G-36W-TW30	2C@36W	9x5TW	WW30	CW60	RA80	2100																			> 0.9						
GTR7502G-36W-RGBW30	4C@36W	9x5RGBW	R	G	B	W																			RA80	1400	> 0.6				
GTR7502H-40W-WW30G	40W	12x5x1.5W SMD3030	G3000K	RA90	3500	> 0.9																			[BLR]: 12/24/38/50° [BLS]: 40x40° 60x60° 80x80° 35x70° [BPS]: P25° [BDF]: 120°	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ				
GTR7502H-40W-NW40G			G4000K	RA90	3730																										
GTR7502H-40W-PW50G			G5000K	RA90	3730																										
GTR7502H-40W-TW30	2C@40W	12x5TW	WW30	CW60	RA80	2400																						> 0.9			
GTR7502H-40W-RGBW30	4C@40W	12x5RGBW	R	G	B	W																						RA80	1600	> 0.6	
GTR7502J-48W-WW30G	48W	14x5x1.5W SMD3030	G3000K	RA90	4380	> 0.9																						[BLR]: 12/24/38/50° [BLS]: 40x40° 60x60° 80x80° 35x70° [BPS]: P25° [BDF]: 120°	[CC DRIVER] 0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI ZIGBEE	[CC DRIVER] AC220~240V [AC100~240V] [AC100~277V] 50/60HZ	
GTR7502J-48W-NW40G			G4000K	RA90	4660																										
GTR7502J-48W-PW50G			G5000K	RA90	4660																										
GTR7502J-48W-TW30	2C@48W	14x5TW	WW30	CW60	RA80	3000																									> 0.9
GTR7502J-48W-RGBW30	4C@48W	14x5RGBW	R	G	B	W																									RA80