




## CONTINUOUS RECESSED LED LINEAR LIGHT

## GTR7111 SERIES



### FEATURES

Creative Innovation of Optimized LED Technology  
Seamless Connection Freedom Lighting  
Perfect Combination of Lighting and Space  
Color Rendering Index Ra>80 【Ra>90】  
Long Lifespan Design>50,000hours  
Working Temperature: -20℃~50℃

### MATERIALS & FINISH

LED Branding: EPISTAR  
External Driver Branding: GTE  
GTE' Patent Aluminum Radiator Profile  
High Efficiency Frosted PC Diffuser

### INSTALLATION


Installation: False Ceiling Recessed  
Suitable for Interior Ceiling Light, like Office.....

### STANDARDS



Designed and Manufactured to Comply with  
TUV/GS/CE/RoHS/EMF/SAA/Erp/UL/cUL/FCC  
IP20 Protection, Class II & I Electric

### OPTIONS

LED Color Temperature: CCT2000~6500K  
LED Color: Red, Green, Blue, Amber, RGB, RGBW  
LED Branding: PHILIPS, CREE, OSRAM  
Driver Branding: PHILIPS, TRIDONIX  
[ CBE ] Emergency Version: 3W or 5W or 10W  
Dimming: 1-10V, Triac, DALI, RF, ZIGBEE, DMX512, WIFI  
Housing Finish Color:



DIMENSION: [UNIT: MM]

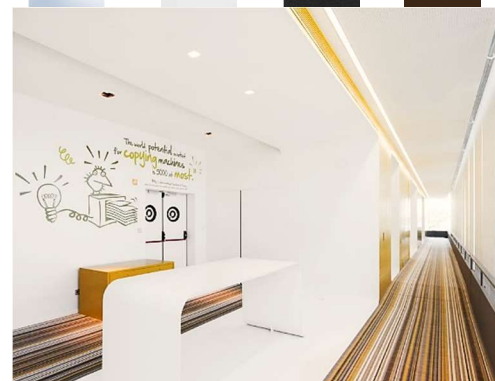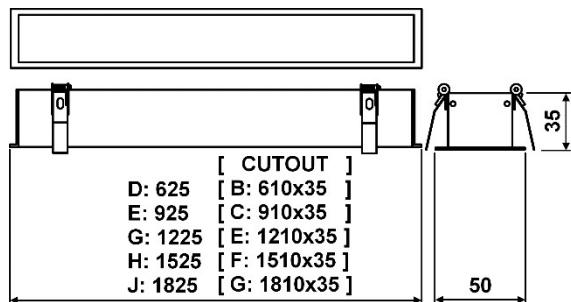

| MODEL                | POWER<br>【W】 | LED<br>TYPE         | CCT<br>【K】 | LUMEN<br>【LM】 |                 |               |                                                          |                                                    |      |  |
|----------------------|--------------|---------------------|------------|---------------|-----------------|---------------|----------------------------------------------------------|----------------------------------------------------|------|--|
| GTR7111D-12W-WW      | 12W          | 60X0.5W<br>SMD2835  | 3000K      | 960           | POWER<br>FACTOR | BEAM<br>ANGLE | CONTROL<br>MODE                                          |                                                    |      |  |
| GTR7111D-12W-NW      |              |                     | 4000K      | 980           |                 |               |                                                          |                                                    |      |  |
| GTR7111D-12W-CW      |              |                     | 6000K      | 1000          |                 |               |                                                          |                                                    |      |  |
| GTR7111D22-12W-CW    | 2C@12W       | 24CW                | WW         | CW            | 720             | >0.9          |                                                          |                                                    |      |  |
| GTR7111D42-12W-RGBW  | 4C@12W       | 24RGBW              | R          | G             | B               | W             | >0.5                                                     |                                                    |      |  |
| GTR7111D52-12W-RGBCW | 5C@12W       | 24RGB+24CW          | R          | G             | B               | WW            | >0.5                                                     |                                                    |      |  |
| GTR7111E-18W-WW      | 18W          | 96X0.5W<br>SMD2835  | 3000K      | 1450          | >0.9            | 120°          | 0/1-10V&TRIAC<br>DMX512&DALI<br>IR&RF&WIFI<br>CCA&ZIGBEE | AC220~240V<br>[AC100~277V]<br>50/60Hz<br>[ DC24V ] |      |  |
| GTR7111E-18W-NW      |              |                     | 4000K      | 1480          |                 |               |                                                          |                                                    |      |  |
| GTR7111E-18W-CW      |              |                     | 6000K      | 1530          |                 |               |                                                          |                                                    |      |  |
| GTR7111G-24W-WW      | 24W          | 120X0.5W<br>SMD2835 | 3000K      | 1950          | >0.9            | 120°          |                                                          |                                                    |      |  |
| GTR7111G-24W-NW      |              |                     | 4000K      | 2000          |                 |               |                                                          |                                                    |      |  |
| GTR7111G-24W-CW      |              |                     | 6000K      | 2050          |                 |               |                                                          |                                                    |      |  |
| GTR7111G22-24W-CW    | 2C@24W       | 48CW                | WW         | CW            | 1440            | >0.9          |                                                          |                                                    |      |  |
| GTR7111G42-24W-RGBW  | 4C@24W       | 48RGBW              | R          | G             | B               | W             |                                                          |                                                    | >0.5 |  |
| GTR7111G52-24W-RGBCW | 5C@24W       | 48RGB+48CW          | R          | G             | B               | WW            |                                                          |                                                    | >0.5 |  |
| GTR7111H-30W-WW      | 30W          | 144X0.5W<br>SMD2835 | 3000K      | 2400          | >0.9            | 120°          |                                                          |                                                    |      |  |
| GTR7111H-30W-NW      |              |                     | 4000K      | 2460          |                 |               |                                                          |                                                    |      |  |
| GTR7111H-30W-CW      |              |                     | 6000K      | 2530          |                 |               |                                                          |                                                    |      |  |
| GTR7111J-36W-WW      | 36W          | 192x0.5W<br>SMD2835 | 3000K      | 2900          | >0.9            | 120°          |                                                          |                                                    |      |  |
| GTR7111J-36W-NW      |              |                     | 4000K      | 2960          |                 |               |                                                          |                                                    |      |  |
| GTR7111J-36W-CW      |              |                     | 6000K      | 3060          |                 |               |                                                          |                                                    |      |  |

### NOTE:

All parameters are measured at 25℃ ambient temperature, 35% humidity experimental environment.  
Tolerances of power and luminous flux are ±10%, tolerance of color rendering index is ±5.