

FEATURE

Upgrade Anti Glare Louver Lighting $UGR \leq 16$
 Personal Eye Protection Standard: RG0 (EN166:2001)
 Color Rendering Index $Ra \geq 90$
 Long Lifespan > 50,000hours
 Working Temperature $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$

MATERIAL & FINISH

LED Brand: SMD LEDs [LM80]
 Backpacked Flicker-free Driver Brand: GUBO
 Housing: Anodized Aluminum Profile Housing
 Optics: Frosted PC Diffuser and Louver
 Mounting: Suspension with L0.9~1.6m Telescopic Rod.

INSTALLATION

Surface Mounted or Suspended
 Widely Application for Classroom, Office, Library,
 Gym, Exhibition Hall.....

STANDARD


Designed and Manufactured to Comply with
 CE/ROHS/EMF/GS/CB/cETL/FCC/SAA Standard
 IP40 and IK08 Protection, Class I Electrical

OPTION

LED CCT: 1800K/2700K/3500K/5500K/6000K
 LED Color: Red, Green, Blue, Amber
 Color Rendering Index: $Ra \geq 97$
 [CBE] Emergency Version: 10W3Hours, 20W3Hours
 Housing Finish Color: (Any Colors in RAL#)

SILVER	BLACK	GREY	BROWN
[H03]	[H02]	[H03]	[H06]

LED BATTEN LOUVER LIGHT



BACKVIEW




FRONTVIEW



CASE STUDY



DIMENSION: [UNIT: MM]

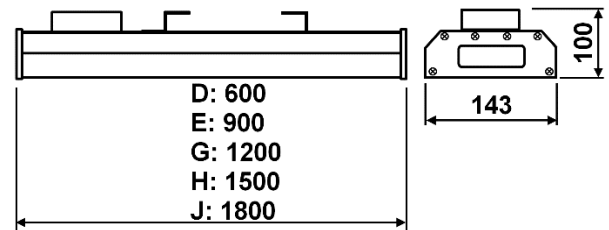

MODEL	POWER 【W】	LED TYPE	CCT 【K】	CRI	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】			
GTR6961D-20W-WW30G	20W	180x0.5W SMD2835	G3000K	RA90	1810	>0.9	120°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&ZIGBEE	AC100~277V [AC180-528V] 50/60Hz			
GTR6961D-20W-NW40G			G4000K	RA90	2020							
GTR6961D-20W-PW50G			G5000K	RA90	2130							
GTR6961D-30W-WW30G	30W	180x0.5W SMD2835	G3000K	RA90	2720	>0.9						
GTR6961D-30W-NW40G			G4000K	RA90	3030							
GTR6961D-30W-PW50G			G5000K	RA90	3200							
GTR6961D-30W-TW	2C@30W	72TW	WW27	CW60	RA90	2720				>0.8		
GTR6961D-30W-RGBW	4C@30W	72RGBW	R	G	B	W				RA90	2720	>0.7
GTR6961E-30W-WW30G	30W	240x1W SMD2835	G3000K	RA90	2720	>0.9						
GTR6961E-30W-NW40G			G4000K	RA90	3030							
GTR6961E-30W-PW50G			G5000K	RA90	3200							
GTR6961E-45W-WW30G	45W	240x1W SMD2835	G3000K	RA90	4350	>0.9						
GTR6961E-45W-NW40G			G4000K	RA90	4860							
GTR6961E-45W-PW50G			G5000K	RA90	5110							
GTR6961G-40W-WW30G	40W	360x0.5W SMD2835	G3000K	RA90	3620	>0.9						
GTR6961G-40W-NW40G			G4000K	RA90	4050							
GTR6961G-40W-PW50G			G5000K	RA90	4260							
GTR6961G-60W-WW30G	60W	360x0.5W SMD2835	G3000K	RA90	5430	>0.9						
GTR6961G-60W-NW40G			G4000K	RA90	6070							
GTR6961G-60W-PW50G			G5000K	RA90	6390							
GTR6961G-60W-TW	2C@60W	96TW	WW27	CW60	RA90	5430				>0.8		
GTR6961G-60W-RGBW	4C@60W	96RGBW	R	G	B	W				RA90	5430	>0.7
GTR6961H-60W-WW30G	60W	432x0.5W SMD2835	G3000K	RA90	5430	>0.9						
GTR6961H-60W-NW40G			G4000K	RA90	6070							
GTR6961H-60W-PW50G			G5000K	RA90	6390							
GTR6961H-80W-WW30G	80W	432x0.5W SMD2835	G3000K	RA90	7240	>0.9						
GTR6961H-80W-NW40G			G4000K	RA90	8080							
GTR6961H-80W-PW50G			G5000K	RA90	8520							
GTR6961J-60W-WW30G	60W	540x0.5W SMD2835	G3000K	RA90	5430	>0.9						
GTR6961J-60W-NW40G			G4000K	RA90	6070							
GTR6961J-60W-PW50G			G5000K	RA90	6390							
GTR6961J-90W-WW30G	90W	540x0.5W SMD2835	G3000K	RA90	8690	>0.9						
GTR6961J-90W-NW40G			G4000K	RA90	9720							
GTR6961J-90W-PW50G			G5000K	RA90	10220							