LED DOWNLIGHT GTG2101 SERIES



FROSTED

BACKVIEW

DIMENSION: 【UNIT: MM】

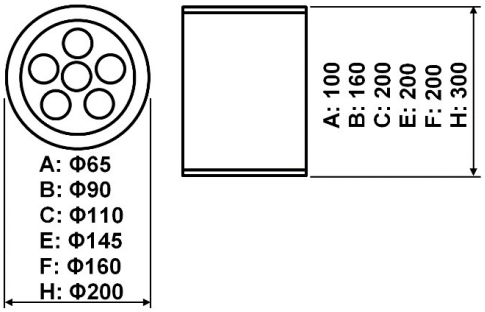

INTRODUCTION

FEATURES
Advanced LED Technology
Color Rendering Index ＞80
Long Lifespan ＞30,000hours

MATERIALS & FINISH
LED Branding: CREE & PHILIPS
Driver Branding: GTE
Die-casted Aluminum Housing
Transparent Glass Diffuser

INSTALLATION
Ceiling Mounted
Suitable for Architecture Illumination, Like Balcony, Veranda, External Wall…

STANDARDS
Designed and Manufactured to Comply with CE/RoHS/cUL/SAA
IP65 Protection, Class Ⅰ& Ⅲ Electric

OPTION
LED Color: CCT2700~6000K, RGB, RGBW, RGBCW
Housing Color Finish:

GREY 【HGR】	BLACK 【HBK】	BROWN 【HBR】	WHITE 【HWT】

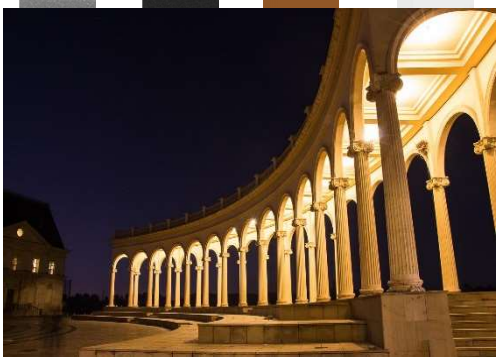

MODEL	POWER 【W】	LED TYPE	CCT 【K】	LUMEN 【LM】	POWER FACTOR	BEAM ANGLE	CONTROL MODE	INPUT 【V】
GTG2101A-3W-WW	3W	3x3W CREE XPE	3000K	180	＞0.9	BLR: 10/15/30° 45/60/90°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI	AC100~277V 50/60Hz [DC12V]
GTG2101A-6W-WW	6W		3000K	360				
GTG2101A22-6W-CW	2C@6W	3CW	WW CW	360	＞0.5			
GTG2101B-5W-WW	5W	6x3W CREE XPE	3000K	300	＞0.9	BLR: 5/10/15° 25/30/45° 60/90/120° BLS: V10xH45° V20xH60° V30xH65°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&PWM ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTG2101B-10W-WW	10W		3000K	600				
GTG2101B22-6W-CW	2C@6W	3CW	WW CW	360	＞0.5			
GTG2101B31-9W-RGB	3C&3W	3RGB	R G B	270	＞0.5			
GTG2101B32-6W-RGB	3C@6W	3RGB	R G B	300	＞0.5			
GTG2101B41-12W-RGBW	4C&3W	3RGBW	R G B W	420	＞0.5			
GTG2101B42-6W-RGBW	4C@6W	3RGBW	R G B W	300	＞0.5			
GTG2101C-9W-WW	9W	9x3W CREE XPE	3000K	540	＞0.9	BLR: 5/10/15° 25/30/45° 60/90/120° BLS: V10xH45° V20xH60° V30xH65°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&PWM ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTG2101C-18W-WW	18W		3000K	1080				
GTG2101C22-12W-CW	2C@12W	6CW	WW CW	780	＞0.5			
GTG2101C31-18W-RGB	3C&6W	6RGB	R G B	540	＞0.5			
GTG2101C32-12W-RGB	3C@12W	6RGB	R G B	600	＞0.5			
GTG2101C41-24W-RGBW	4C&6W	6RGBW	R G B W	840	＞0.5			
GTG2101C42-12W-RGBW	4C@12W	6RGBW	R G B W	600	＞0.5			
GTG2101C51-24W-RGBCW	5C&6W	6RGBCW	R G B W W	1440	＞0.5			
GTG2101E-12W-WW	12W	12x3W CREE XPE	3000K	720	＞0.9	BLR: 5/10/15° 25/30/45° 60/90/120° BLS: V10xH45° V20xH60° V30xH65°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&PWM ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTG2101E-24W-WW	24W		3000K	1440				
GTG2101E22-18W-CW	2C@18W	9CW	WW CW	1180	＞0.5			
GTG2101E31-27W-RGB	3C&9W	9RGB	R G B	810	＞0.5			
GTG2101E32-18W-RGB	3C@18W	9RGB	R G B	900	＞0.5			
GTG2101E41-36W-RGBW	4C&9W	9RGBW	R G B W	1260	＞0.5			
GTG2101E42-18W-RGBW	4C@18W	9RGBW	R G B W	1080	＞0.5			
GTG2101F-18W-WW	18W	18x3W CREE XPE	3000K	1100	＞0.9	BLR: 5/10/15° 25/30/45° 60/90/120° BLS: V10xH45° V20xH60° V30xH65°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&PWM ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTG2101F-36W-WW	36W		3000K	2200				
GTG2101F22-24W-CW	2C@24W	12CW	WW CW	1550	＞0.5			
GTG2101F31-36W-RGB	3C&12W	12RGB	R G B	1080	＞0.5			
GTG2101F32-24W-RGB	3C@24W	12RGB	R G B	1200	＞0.5			
GTG2101F41-24W-RGBW	4C&6W	12RGBW	R G B W	840	＞0.5			
GTG2101F41-48W-RGBW	4C&12W	12RGBW	R G B W	1680	＞0.5			
GTG2101F42-24W-RGBW	4C@24W	12RGBW	R G B W	1440	＞0.5			
GTG2101F43-12W-RGBW	4C@12W	12RGBW	R G B W	600	＞0.5			
GTG2101F51-48W-RGBCW	5C&12W	12RGBCW	R G B W W	1440	＞0.5			
GTG2101F52-12W-RGBCW	5C@12W	12RGBCW	R G B W W	600	＞0.5			
GTG2101H-24W-WW	24W	24x3W CREE XPE	3000K	1440	＞0.9	BLR: 5/10/15° 25/30/45° 60/90/120° BLS: V10xH45° V20xH60° V30xH65°	0/1-10V&TRIAC DMX512&DALI IR&RF&WIFI CCA&PWM ZIGBEE	AC100~277V 50/60Hz [DC24V]
GTG2101H-48W-WW	48W		3000K	2880				
GTG2101H22-36W-CW	2C@36W	18CW	WW CW	2300	＞0.5			
GTG2101H31-54W-RGB	3C&18W	18RGB	R G B	1620	＞0.5			
GTG2101H32-36W-RGB	3C@36W	18RGB	R G B	1800	＞0.5			
GTG2101H41-48W-RGBW	4C&12W	18RGBW	R G B W	1680	＞0.5			
GTG2101H41-72W-RGBW	4C&18W	18RGBW	R G B W	2520	＞0.5			
GTG2101H42-36W-RGBW	4C@36W	18RGBW	R G B W	2160	＞0.5			

Charlotte International Partners Inc., 1740 First Baxter Crossing, Fort MIll SC 29708 USA
info@ciplighting.com 1-803-396-1439 www.ciplighting.com